

User's Manual



ISS 408 & ISS 108

Integration Seamless Switchers

Precautions

Safety Instructions • English



This symbol is intended to alert the user of important operating and maintenance (servicing) instructions in the literature provided with the equipment.



This symbol is intended to alert the user of the presence of uninsulated dangerous voltage within the product's enclosure that may present a risk of electric shock.

Caution

Read Instructions • Read and understand all safety and operating instructions before using the equipment.

Retain Instructions • The safety instructions should be kept for future reference.

Follow Warnings • Follow all warnings and instructions marked on the equipment or in the user information.

Avoid Attachments • Do not use tools or attachments that are not recommended by the equipment manufacturer because they may be hazardous.

Consignes de Sécurité • Français



Ce symbole sert à avertir l'utilisateur que la documentation fournie avec le matériel contient des instructions importantes concernant l'exploitation et la maintenance (réparation).



Ce symbole sert à avertir l'utilisateur de la présence dans le boîtier de l'appareil de tensions dangereuses non isolées posant des risques d'électrocution.

Attention

Lire les instructions • Prendre connaissance de toutes les consignes de sécurité et d'exploitation avant d'utiliser le matériel.

Conservier les instructions • Ranger les consignes de sécurité afin de pouvoir les consulter à l'avenir.

Respecter les avertissements • Observer tous les avertissements et consignes marqués sur le matériel ou présentés dans la documentation utilisateur.

Eviter les pièces de fixation • Ne pas utiliser de pièces de fixation ni d'outils non recommandés par le fabricant du matériel car cela risquerait de poser certains dangers.

Sicherheitsanleitungen • Deutsch



Dieses Symbol soll dem Benutzer in der im Lieferumfang enthaltenen Dokumentation besonders wichtige Hinweise zur Bedienung und Wartung (Instandhaltung) geben.



Dieses Symbol soll den Benutzer darauf aufmerksam machen, daß im Inneren des Gehäuses dieses Produktes gefährliche Spannungen, die nicht isoliert sind und die einen elektrischen Schock verursachen können, herrschen.

Achtung

Lesen der Anleitungen • Bevor Sie das Gerät zum ersten Mal verwenden, sollten Sie alle Sicherheits- und Bedienungsanleitungen genau durchlesen und verstehen.

Aufbewahren der Anleitungen • Die Hinweise zur elektrischen Sicherheit des Produktes sollten Sie aufbewahren, damit Sie im Bedarfsfall darauf zurückgreifen können.

Befolgen der Warnhinweise • Befolgen Sie alle Warnhinweise und Anleitungen auf dem Gerät oder in der Benutzerdokumentation.

Keine Zusatzgeräte • Verwenden Sie keine Werkzeuge oder Zusatzgeräte, die nicht ausdrücklich vom Hersteller empfohlen wurden, da diese eine Gefahrenquelle darstellen können.

Instrucciones de seguridad • Español



Este símbolo se utiliza para advertir al usuario sobre instrucciones importantes de operación y mantenimiento (o cambio de partes) que se desean destacar en el contenido de la documentación suministrada con los equipos.



Este símbolo se utiliza para advertir al usuario sobre la presencia de elementos con voltaje peligroso sin protección aislante, que puedan encontrarse dentro de la caja o alojamiento del producto, y que puedan representar riesgo de electrocución.

Precaucion

Leer las instrucciones • Leer y analizar todas las instrucciones de operación y seguridad, antes de usar el equipo.

Conservar las instrucciones • Conservar las instrucciones de seguridad para futura consulta.

Obedecer las advertencias • Todas las advertencias e instrucciones marcadas en el equipo o en la documentación del usuario, deben ser obedecidas.

Evitar el uso de accesorios • No usar herramientas o accesorios que no sean específicamente recomendados por el fabricante, ya que podrían implicar riesgos.

Warning

Power sources • This equipment should be operated only from the power source indicated on the product. This equipment is intended to be used with a main power system with a grounded (neutral) conductor. The third (grounding) pin is a safety feature, do not attempt to bypass or disable it.

Power disconnection • To remove power from the equipment safely, remove all power cords from the rear of the equipment, or the desktop power module (if detachable), or from the power source receptacle (wall plug).

Power cord protection • Power cords should be routed so that they are not likely to be stepped on or pinched by items placed upon or against them.

Servicing • Refer all servicing to qualified service personnel. There are no user-serviceable parts inside. To prevent the risk of shock, do not attempt to service this equipment yourself because opening or removing covers may expose you to dangerous voltage or other hazards.

Slots and openings • If the equipment has slots or holes in the enclosure, these are provided to prevent overheating of sensitive components inside. These openings must never be blocked by other objects.

Lithium battery • There is a danger of explosion if battery is incorrectly replaced. Replace it only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

Avertissement

Alimentations • Ne faire fonctionner ce matériel qu'avec la source d'alimentation indiquée sur l'appareil. Ce matériel doit être utilisé avec une alimentation principale comportant un fil de terre (neutre). Le troisième contact (de mise à la terre) constitue un dispositif de sécurité : n'essayez pas de la contourner ni de la désactiver.

Déconnexion de l'alimentation • Pour mettre le matériel hors tension sans danger, déconnectez tous les cordons d'alimentation de l'arrière de l'appareil ou du module d'alimentation de bureau (s'il est amovible) ou encore de la prise secteur.

Protection du cordon d'alimentation • Acheminer les cordons d'alimentation de manière à ce que personne ne risque de marcher dessus et à ce qu'ils ne soient pas écrasés ou pincés par des objets.

Réparation-maintenance • Faire exécuter toutes les interventions de réparation-maintenance par un technicien qualifié. Aucun des éléments internes ne peut être réparé par l'utilisateur. Afin d'éviter tout danger d'électrocution, l'utilisateur ne doit pas essayer de procéder lui-même à ces opérations car l'ouverture ou le retrait des couvercles risquent de l'exposer à de hautes tensions et autres dangers.

Fentes et orifices • Si le boîtier de l'appareil comporte des fentes ou des orifices, ceux-ci servent à empêcher les composants internes sensibles de surchauffer. Ces ouvertures ne doivent jamais être bloquées par des objets.

Lithium Batterie • Il a danger d'explosion s'il y a remplacement incorrect de la batterie. Remplacer uniquement avec une batterie du même type ou d'un type équivalent recommandé par le constructeur. Mettre au reut les batteries usagées conformément aux instructions du fabricant.

Vorsicht

Stromquellen • Dieses Gerät sollte nur über die auf dem Produkt angegebene Stromquelle betrieben werden. Dieses Gerät wurde für eine Verwendung mit einer Hauptstromleitung mit einem geerdeten (neutralen) Leiter konzipiert. Der dritte Kontakt ist für einen Erdschluß, und stellt eine Sicherheitsfunktion dar. Diese sollte nicht umgangen oder außer Betrieb gesetzt werden.

Stromunterbrechung • Um das Gerät auf sichere Weise vom Netz zu trennen, sollten Sie alle Netzkabel aus der Rückseite des Gerätes, aus der externen Stromversorgung (falls dies möglich ist) oder aus der Wandsteckdose ziehen.

Schutz des Netzkabels • Netzkabel sollten stets so verlegt werden, daß sie nicht im Weg liegen und niemand darauf treten kann oder Objekte darauf- oder unmittelbar dagegengestellt werden können.

Wartung • Alle Wartungsmaßnahmen sollten nur von qualifiziertem Servicepersonal durchgeführt werden. Die internen Komponenten des Gerätes sind wartungsfrei. Zur Vermeidung eines elektrischen Schocks versuchen Sie in keinem Fall, dieses Gerät selbst öffnen, da beim Entfernen der Abdeckungen die Gefahr eines elektrischen Schlags und/oder andere Gefahren bestehen.

Schlitze und Öffnungen • Wenn das Gerät Schlitze oder Löcher im Gehäuse aufweist, dienen diese zur Vermeidung einer Überhitzung der empfindlichen Teile im Inneren. Diese Öffnungen dürfen niemals von anderen Objekten blockiert werden.

Litium-Batterie • Explosionsgefahr, falls die Batterie nicht richtig ersetzt wird. Ersetzen Sie verbrauchte Batterien nur durch den gleichen oder einen vergleichbaren Batterietyp, der auch vom Hersteller empfohlen wird. Entsorgen Sie verbrauchte Batterien bitte gemäß den Herstelleranweisungen.

Advertencia

Alimentación eléctrica • Este equipo debe conectarse únicamente a la fuente/tipo de alimentación eléctrica indicada en el mismo. La alimentación eléctrica de este equipo debe provenir de un sistema de distribución general con conductor neutro a tierra. La tercera pata (puesta a tierra) es una medida de seguridad, no puentearia ni eliminaria.

Desconexión de alimentación eléctrica • Para desconectar con seguridad la acometida de alimentación eléctrica al equipo, desenchufar todos los cables de alimentación en el panel trasero del equipo, o desenchufar el módulo de alimentación (si fuera independiente), o desenchufar el cable del receptáculo de la pared.

Protección del cables de alimentación • Los cables de alimentación eléctrica se deben instalar en lugares donde no sean pisados ni apretados por objetos que se puedan apoyar sobre ellos.

Reparaciones/mantenimiento • Solicitar siempre los servicios técnicos de personal calificado. En el interior no hay partes a las que el usuario deba acceder. Para evitar riesgo de electrocución, no intentar personalmente la reparación/mantenimiento de este equipo, ya que al abrir o extraer las tapas puede quedar expuesto a voltajes peligrosos u otros riesgos.

Ranuras y aberturas • Si el equipo posee ranuras o orificios en su caja/alojamiento, es para evitar el sobrecalentamiento de componentes internos sensibles. Estas aberturas nunca se deben obstruir con otros objetos.

Batería de litio • Existe riesgo de explosión si esta batería se coloca en la posición incorrecta. Cambiar esta batería únicamente con el mismo tipo (o su equivalente) recomendado por el fabricante. Desachar las baterías usadas siguiendo las instrucciones del fabricante.

Quick Start — Integration Seamless Switcher

Installation

Step 1


Turn off power to the ISS 108 or ISS 408 and the input and output devices, and remove the power cords from them.

Step 2

If desired, install an optional DVI output card into the switcher. See chapter 7, *Maintenance and Modifications*.


Step 3

Install four rubber feet on the bottom of the ISS or mount the ISS in a rack.

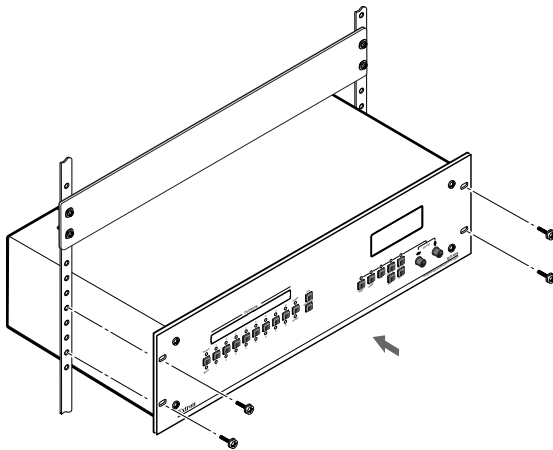


Step 4

Connect up to eight computer/RGB video, component video, S-video, or composite video sources to the female BNC input connectors. The figure below shows how to connect the various video formats.

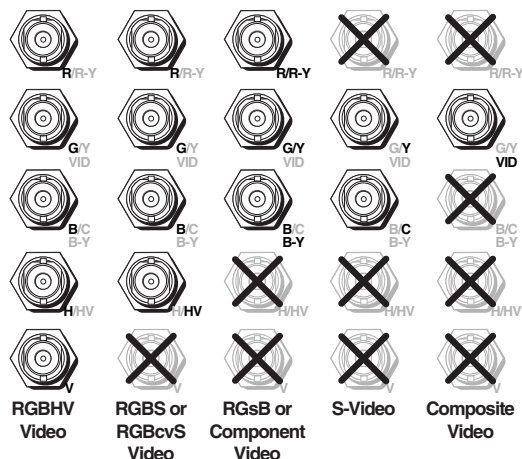

Step 5


Cable the switcher for stereo audio input. Each input has a 3.5 mm, 5-pole captive screw connector for balanced or unbalanced stereo or mono audio input. Connectors are included with each switcher, but you must supply the audio cable. High impedance is generally over 800 ohms.

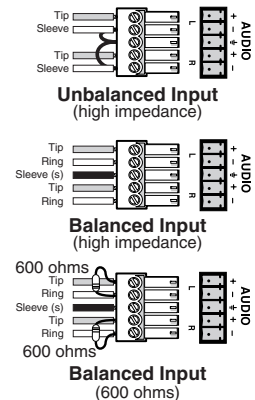

Step 6


Connect RGB video displays to the Preview output and Program output female BNC and 15-pin HD connectors. Connect the various video formats to the BNC connectors as shown.

NOTE Both output connector types output the same video signal and the same sync format.

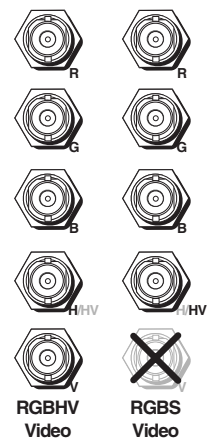


Step 7

If the optional DVI output card is installed, connect a DVI video display to the Program output DVI connector.



Step 8

Cable the switcher for stereo audio output. Each output has a 3.5 mm, 5-pole captive screw connector that outputs the selected unamplified, line level audio. Connect an audio device, such as an audio amplifier or powered speakers.




CAUTION Connect the sleeve to ground. Connecting the sleeve to a negative (-) terminal will damage the audio output circuits.

Quick Start — Integration Seamless Switcher, cont'd

Step 9

If desired, connect a control system or computer to the Remote RS-232 port.


Pin	RS-232	Function
1	—	Not used
2	TX	Transmit data
3	RX	Receive data
4	—	Not used
5	Gnd	Signal ground
6	—	Not used
7	—	Not used
8	—	Not used
9	—	Not used



Step 10

If desired, connect a network WAN or LAN hub, a control system, or computer to the Ethernet RJ-45 port.

- For **connection to a network**, wire the interface cable as a **straight-through cable**.
- For **connection to a computer** or control system, wire the interface cable as a **crossover cable**.

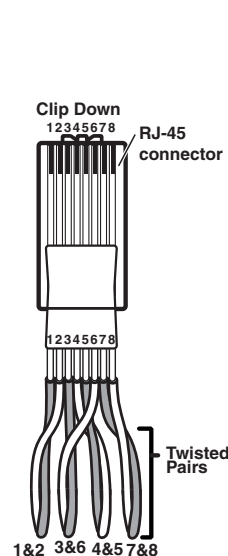

Straight-through cable

Side 1		Side 2	
Pin	Wire color	Pin	Wire color
1	White-orange	1	White-orange
2	Orange	2	Orange
3	White-green	3	White-green
4	Blue	4	Blue
5	White-blue	5	White-blue
6	Green	6	Green
7	White-brown	7	White-brown
8	Brown	8	Brown

Crossover cable

Side 1		Side 2	
Pin	Wire color	Pin	Wire color
1	White-orange	1	White-green
2	Orange	2	Green
3	White-green	3	White-orange
4	Blue	4	Blue
5	White-blue	5	White-blue
6	Green	6	Orange
7	White-brown	7	White-brown
8	Brown	8	Brown

Step 11

Plug the Integration Seamless Switcher and input and output devices into a grounded AC source, and turn on the input and output devices.

Setup and Operation

Configure the inputs

1. Press **Menu > Next**.

2. Press an input button (to select the input to configure).
3. Rotate the Adjust $\blacktriangleleft\blacktriangleright$ knob to select the input video type.
4. Rotate the Adjust \blacktriangledown knob to select the input audio gain or attenuation level.
5. Select other inputs to configure as necessary by pressing the appropriate input button.
6. Press **Menu > Menu > Menu > Menu > Next** to return the default display cycle.

Configure the output

1. Press **Menu > Menu > Next**.
2. Rotate the Adjust $\blacktriangleleft\blacktriangleright$ knob to select the output rate.
3. Rotate the Adjust \blacktriangledown knob to select the output frequency.
4. Press **Next**.
5. Rotate the Adjust $\blacktriangleleft\blacktriangleright$ knob to select the output video sync format (RGBHV or RGBS).
6. Rotate the Adjust \blacktriangledown knob to select the sync polarity.
7. Press **Menu > Menu > Menu > Next** to return the default display cycle.

Select a preview output, switch it to program output

Select video and/or audio to switch by pressing the Video/Audio button as necessary to light the green Video LED and/or the red Audio LED as desired.

Press an input button to select a video and/or audio input for the preview output. The preview output's input selection is indicated by the flashing green (for video) and/or red (for audio) Input LED(s).

Press either the Cut or Dissolve button to switch the preview output to the program output. Cut makes an immediate seamless switch. Dissolve masks the seamless switch with a dissolve effect of a user-assignable duration. The program output's input selection is indicated by the solid green (for video) and/or red (for audio) Input LED(s).

Auto image™

Initiate the auto imaging function for a specific input by pressing and **holding** the appropriate input button until the LCD displays the message **Auto Image Input #n**, releasing the input button, and then pressing and releasing the input button again.

Table of Contents

Chapter 1 • Introduction	1-1
About this Manual	1-2
About the Switcher	1-2
Features	1-4
 Chapter 2 • Installation	 2-1
Mounting the Switcher	2-2
Tabletop placement	2-2
Rack mounting	2-2
Cabling and Rear Panel Views	2-3
Input connections	2-3
Standard output connections	2-5
Optional output connection	2-6
Ethernet connection	2-6
Cabling and RJ-45 connector wiring	2-6
Choosing a network cable	2-6
Wiring the network cable	2-7
RS-232 connection	2-8
Configuration	2-8
 Chapter 3 • Operation	 3-1
Front Panel Controls and Indicators	3-2
Black/Mute, input selection, and Cut/Dissolve controls	3-2
Picture adjustment and menu system controls	3-3
Front Panel Operations	3-4
Power-on indications	3-4
Selecting an input and switching it to the program output	3-5
Recalling a user preset	3-7
Auto imaging an input	3-7
Menu system overview	3-8
Video & Audio Configuration menu	3-9
Input Configuration submenu	3-9
Output Configuration menu	3-10
Output Resolution submenu	3-10
Sync Type and Polarity submenu	3-11
Advanced Configuration menu	3-12
Dissolve Speed submenu	3-13
Test Pattern submenu	3-13
Blue Only Mode and Edge Smoothing submenu	3-13
Preview and Program Blanking submenus	3-13
RGB Delay submenu	3-13
Auto Imaging and Auto Memories submenu	3-14
Enhanced Mode submenu	3-14
Pixel Phase submenu	3-14

Table of Contents, cont'd

Preview Switch Mode submenu	3-14
PAL Fil Mode submenu	3-15
Reset submenu	3-15
User Presets menu	3-16
Save Preview Presets submenu	3-16
Erase Preview Presets submenu	3-17
Exit menu	3-17
Picture adjustments	3-18
Front panel security lockout (executive mode)	3-19
IP information	3-20
Optimizing the Video	3-20
Setting up a DVD source	3-21
Optimizing the Audio	3-22
Troubleshooting	3-22
General checks	3-22
Specific problems	3-23
 Chapter 4 • Programmer's Guide	4-1
RS-232 Link	4-2
Ethernet Link	4-2
Ethernet connection	4-3
Default address	4-3
Symbols	4-3
Switcher-Initiated Messages	4-4
Power-up	4-4
Input selection	4-4
Busy (cut and dissolve)	4-4
Cutting or dissolving in stay mode	4-4
Cutting or dissolving in swap mode	4-5
Input and output video type	4-5
Picture adjustments	4-5
RGB delay and dissolve speed	4-6
Test pattern	4-7
Audio gain and attenuation	4-7
Output video and audio mute	4-7
Preview switch mode	4-7
PAL film mode	4-7
Automated adjustments	4-8
Host-to-Switcher Instructions	4-8
Switcher Error Responses	4-8

Using the Command/Response Table	4-8
Command/response table for SIS commands	4-9
Command/response table for IP SIS commands	4-15
Command/response table for special function SIS commands	4-16
Command/response table for advanced instruction Set commands	4-18
 Chapter 5 • Switcher Software	5-1
Control Software for Windows	5-2
Installing the software	5-2
Software Operation via Ethernet	5-2
Ethernet protocol settings	5-2
Using the control program	5-3
Using the help program	5-5
Button-Label Generator	5-5
Installing the software	5-6
Using the software	5-6
 Chapter 6 • Ethernet Operation	6-1
Load the Startup (Control) Page	6-2
Control Page	6-3
Select and switch an input	6-4
Change the RGB delay or dissolve speed	6-4
Blackout the screen and mute the audio	6-5
Freeze the output	6-5
Output a test pattern	6-5
Preview the scan rate	6-5
Blue screen	6-5
Front panel security lockout (executive mode)	6-6
System Configuration Page	6-6
Administration fields	6-6
ISS IP settings field	6-7
ISS IP address field	6-7
ISS name field	6-7
Hardware address field	6-7
File Management Page	6-8
I/O Configuration Page	6-9
Input configuration	6-9
Output resolution, rate, sync format, and polarity	6-10
Output resolution	6-11
Output rate	6-11
Output format	6-12
Output polarity	6-12

Table of Contents, cont'd

Chapter 7 • Maintenance and Modifications	7-1
Opening and Closing the Switcher	7-2
Firmware Upgrade Installation	7-3
DVI Output Card Installation	7-4
 Appendix A • Ethernet Connection	A-1
Ethernet Link	A-2
Ethernet connection	A-2
Default address	A-3
Ping to determine the switcher's IP address	A-3
Ping to determine Web IP address	A-3
Connect as a Telnet client	A-4
Telnet tips	A-4
Open	A-4
Escape character and Esc key	A-5
Local echo	A-5
Set carriage return-line feed	A-5
Close	A-5
Help	A-5
Quit	A-5
 Appendix B • Reference Information	B-1
Specifications	B-2
Part Numbers	B-4
Included parts	B-4
Optional accessories	B-4
Cables	B-4
Bulk cable	B-5
Assorted connectors	B-5
Pre-cut cables	B-5
Button Labels	B-5



Integration Seamless Switcher

1 Chapter One

Introduction

About this Manual

About the Switcher

Features

Introduction

About this Manual

This manual contains installation, configuration, and operating information for the Extron ISS 108 and ISS 408 Integration Seamless Switchers.

The ISS 108 and ISS 408 are similar in function and operation; the differences exist in scaling capabilities. In this manual, the terms “switcher” and “ISS” are used interchangeably to refer to either model, except where differences exist, in which case the specific model is noted.

- Chapter 1 identifies the switcher’s features.
- Chapter 2 details how to install the switcher.
- Chapter 3 describes how to operate the switcher and use all of its features.
- Chapter 4 provides information about programming and operating the switcher under RS-232 control, such as from a PC or host controller.
- Chapter 5 details the Extron control software for Windows, which allows you to operate the switcher from a PC in a graphical environment.
- Chapter 6 details operation of the switcher using an Ethernet browser.
- Chapter 7 provides procedures for maintaining and modifying the switcher.
- Appendix A is a high-level Internet protocol (IP) primer (Ethernet and Telnet).
- Appendix B lists the switcher’s specifications and pertinent part numbers.

About the Switcher

The Extron ISS 108 and ISS 408 are eight-input, scaling, video and stereo audio seamless switchers. Figure 1-1 shows a typical ISS 408 application. The switchers accept high resolution RGB video, YUV (component) video, S-video (Y/C), and composite video inputs; scale the inputs; and output RGBHV or RGBS video and stereo audio. The ISS seamlessly switches among the input sources without a loss of sync. The ISS can also mask the switch between sources with a dissolve effect for a professional look.

Each video input is individually configurable to allow for different video formats. The ISS allows analog RGBHV, RGBS, RGsB, and RGBcvS video, component video, S-video, and composite video signals to be displayed on a device with a fixed resolution and aspect ratio, such as an liquid crystal display (LCD) projector, digital light processor (DLP) projector, plasma display, or digital visual interface (DVI) device.

The ISS provides two separate outputs: the *program* output and the *preview* output. The program output is the picture the audience sees. The preview output allows the switcher operator to view the image before it is sent to the program output. With an optional DVI output card, the ISS converts the scaled image to DVI as an additional program output.

The switcher inputs all valid video signal formats on eight sets of five BNC connectors. The ISS 408 scales the input up or down to any of 40 output resolutions and rates. The ISS 108 scales the inputs to any of 20 resolutions and rates. Either switcher outputs the scaled video, as RGBHV or RGBS, on two sets (program and preview) of connectors. The program and preview outputs each consist of five BNC connectors and a 15-pin HD connector. The BNC connectors and 15-pin HD connector share identical outputs. Several of the output resolutions and rates include Extron’s Accu-RATE Frame Lock™ (AFL™), a proprietary technology that locks the output frame rate to the input rate, solving the image tearing problem that can result from different input and output rates. The ISS 408 features HDTV 576p, 720p, 1080p, and 1080i outputs.

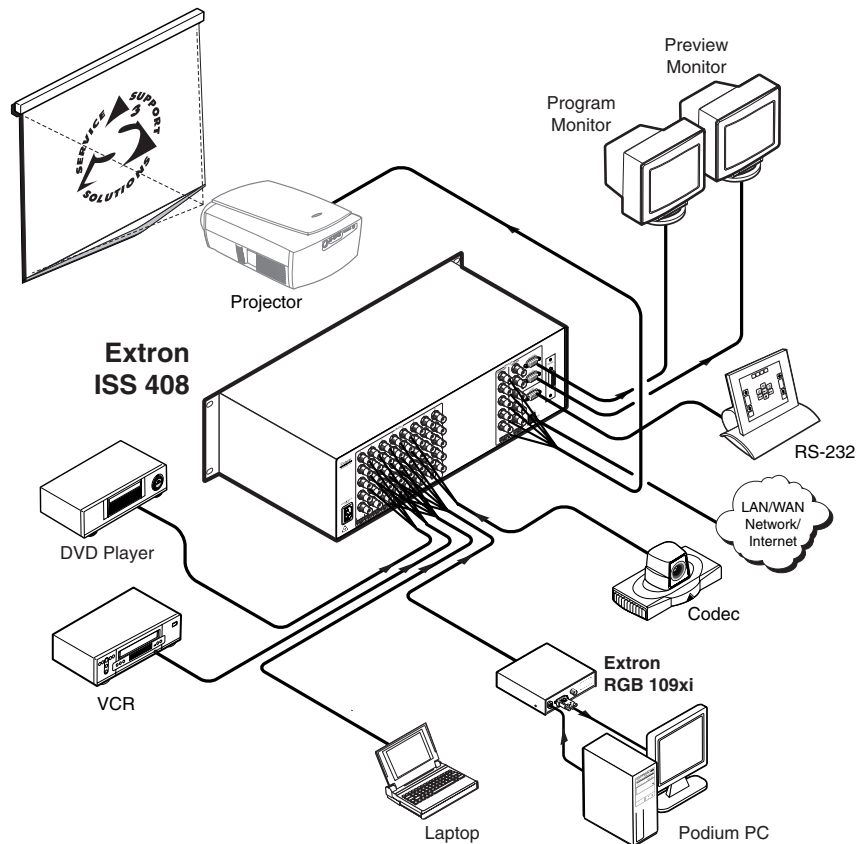


Figure 1-1 — Typical ISS 408 Integration Seamless Switcher application

The ISS receives and outputs the stereo audio on 5-pole captive screw connectors. The audio can be switched with cross fading (that is, the previous audio channel fades out and then the new audio channel fades in).

For upscaling, the ISS 408 converts the horizontal and vertical sync timing and the number of lines of the lower-resolution video input to match the native resolution of the display. This produces an undistorted, brighter picture than an unscaled input would.

For downscaling, the ISS 408 accepts any computer resolution, up to 1600 x 1200, with horizontal scan rates up to 100 kHz and vertical scan rates up to 120 Hz, and converts the input to match the native resolution of the display.

The switcher is ideal for displaying images on projectors with limited display resolutions, such as LCD projectors, DLP projectors, plasma projectors, and (with an optional DVI card) a DVI display or projector.

The switcher features built-in test patterns to aid in monitor or projector set-up and evaluation.

The switcher is housed in a rack-mountable, 3U high, 17.5" wide, metal enclosure. The ISS has an internal 100 VAC to 240 VAC, 50/60 Hz, 30 watts autoswitchable power supply that provides worldwide power compatibility.

Features

Inputs —

Video inputs — The ISS switches among eight fully-configurable RGB, HDTV component video (ISS 408), component video, S-video, and composite video inputs on five BNC connectors per input.

Audio inputs — The ISS switches among eight balanced or unbalanced stereo or mono audio inputs on 5-pole captive screw connectors.

Outputs —

Standard video outputs — The ISS outputs individually scaled video signals as RGBHV or RGBS. Two sets of BNC connectors and two 15-pin HD connectors are provided. One set of BNC connectors and one 15-pin HD connector display the program image, and the other set of BNC connectors and 15-pin HD connector display the preview image.

Optional video output — If you install an optional DVI output card, a single loop of DVI-D can be output on a DVI connector as an additional program output image. The DVI output's horizontal resolution is limited to either 1024 or 1280 pixels. The vertical resolution is the selected vertical resolution.

Audio outputs — The ISS outputs the selected unamplified, line level, balanced or unbalanced stereo or mono audio on 5-pole captive screw connectors.

Accu-RATE Frame Lock (AFL) — A patented technology exclusive to Extron that solves frame rate conversion issues experienced by video scalers. When video input and output refresh rates differ, occasionally the two rates cross over each other. The result is a glitch or image freeze on the display. AFL solves this problem by locking the output frame rate to the input frame rate.

Dynamic Motion Interpolation™ (DMI™) — This video processing technique is an advanced motion prediction and compensation method that treats motion content and still content with different algorithms to yield high fidelity images.

3:2 pulldown detection for NTSC and 2:2 film detection for PAL video sources — These advanced, patent pending, film mode processing features help maximize image detail and sharpness for video sources that originated from film. When film is converted to NTSC video, the film frame rate has to be matched to the video frame rate in a process called 3:2 pulldown. Jaggies and other image artifacts can result if conventional deinterlacing techniques are used on film-source video. The ISS's advanced film mode processing recognizes signals that originated from film. The ISS then applies video processing algorithms that optimize the conversion of video that was made with the 3:2 pulldown process. This results in richly detailed images with sharply defined lines.

A similar process is used for PAL film-source video.

Audio follow and breakaway — Audio switching can follow its corresponding video input signal or it can be broken away from the video input. Audio breakaway switching can be done via front panel control or under RS-232 or Ethernet remote control.

Audio gain/attenuation — Users can set the input level of audio gain or attenuation (-24 dB to +9 dB) via the RS-232 or Ethernet link or from the front panel. Individual input audio levels can be adjusted so there are no noticeable volume differences between sources.

Audio cross-fading — A transition technique that is applied during the switches that lowers the audio level of the switched out source while simultaneously raising the audio level of the activated source.

Ethernet port — Supports connection to an Ethernet LAN so that the switcher can be accessed and operated from a computer running a standard Internet browser anywhere in the world.

Quad-standard video decoder — The switcher uses a digital, four-line adaptive comb filter that can decode NTSC 3.58, NTSC 4.43, PAL, and SECAM.

Transitions — Control the type of switch that will occur between the preview and program outputs. The Cut button creates an instant switch between the preview and program outputs. The Dissolve button switches with a dissolve effect.

Test patterns — The switcher features built-in test patterns to aid in monitor or projector set-up and evaluation.

Blue mode — The switcher can be set to output the blue video signal only, to help installers calibrate the monitor or projector.

Triple-Action Switching™ (RGB delay) (preview output) — RGB delay mutes the R, G, and B video planes to blank the preview screen while the scaler locks to the new sync, so that a noise-filled scramble is not shown on the preview monitor during the transition. The time delay between the RGB and sync signals is user adjustable up to five seconds under front panel, SIS, and program control.

Auto memories — The eight inputs support 16 auto-recall memories each, based on the incoming frequency. Information on sizing, centering, detail, contrast, and brightness is saved.

Auto Image™ — The auto imaging feature automatically sizes and centers the selected input to fill the screen. Auto imaging can be selected for individual inputs as desired or set to automatically size and center each new input selection.

Memory presets — The ISS 408 has memory for up to 128 presets that allow the user to use RS-232 commands to save and recall color, tint, contrast, brightness, centering, sizing, and filtering information.

Aspect ratio memories — Three memories for each input save different settings for color, tint, contrast, brightness, detail, size, and centering.

Freeze mode (under SIS and Windows program control only) — Locks the output display to the selected image. Once frozen, an input can be removed without losing the output image. This feature lets the ISS function as a still store.

Rack mountable — The 3U high switcher can be mounted in any conventional 19" wide rack.



Integration Seamless Switcher

Chapter Two

Installation

Mounting the Switcher

Cabling and Rear Panel Views

Configuration

Installation

Mounting the Switcher

Four uninstalled rubber feet are included with the switcher. If you are going to rack mount the switcher, mount it before you cable it (see *Rack mounting*, below), and do not install the rubber feet. If you are not rack mounting the switcher, see *Tabletop placement* below.

Tabletop placement

For tabletop placement, install the self-adhesive rubber feet/pads (provided) onto the four corners of the bottom of the switcher.

Rack mounting

To rack mount the switcher, use two screws on each end of the switcher to attach the switcher to the rack (see figure 2-1).

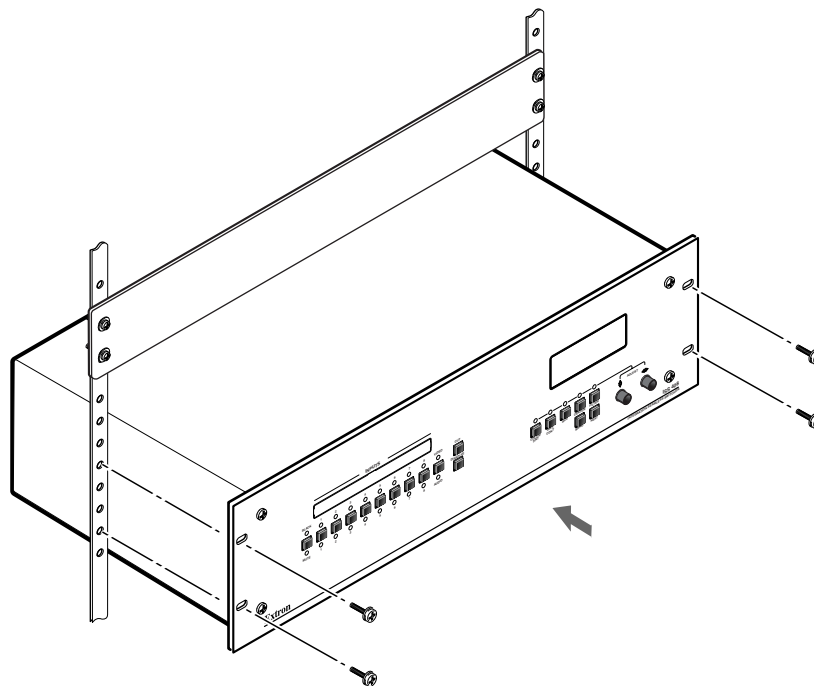


Figure 2-1 — Mounting the switcher

Cabling and Rear Panel Views

All connectors are on the rear panel (figure 2-2).

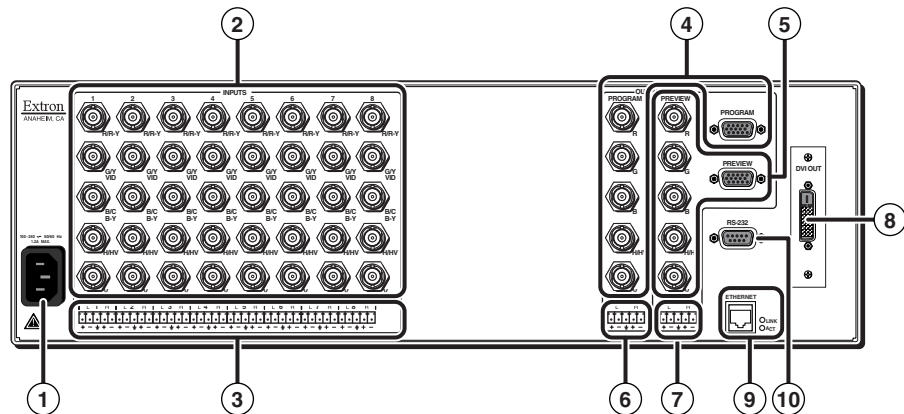


Figure 2-2 — ISS 408 rear panel connectors

Input connections

- ① **AC power connector** — Plug a standard IEC power cord into this connector to connect the switcher to a 100 to 240 VAC, 50 Hz or 60 Hz power source.
- ② **Input video connectors** — Connect computer or RGB video, component video, S-video, or composite video to these female BNC connectors. Figure 2-3 shows how to connect the various video formats.

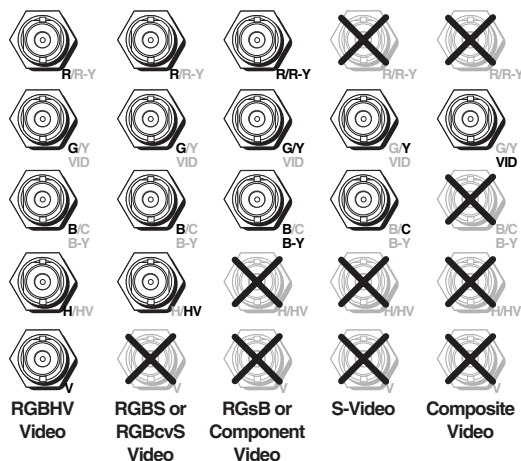


Figure 2-3 — Connections for various input video formats

Installation, cont'd

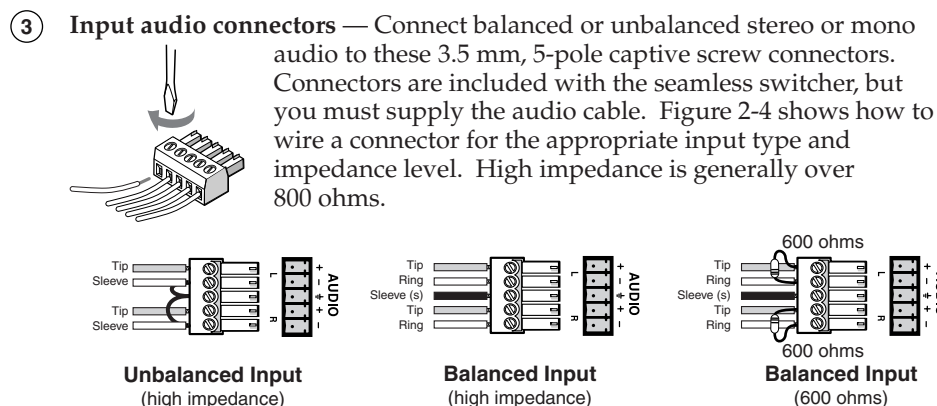


Figure 2-4 — Captive screw connector wiring for inputs

NOTE When making connections for the seamless switcher from existing audio cables, see figure 2-5. A mono audio connector consists of the tip and sleeve. A stereo audio connector consists of the tip, ring and sleeve. The ring, tip, and sleeve wires are also shown on the captive screw audio connector diagram, figure 2-4.

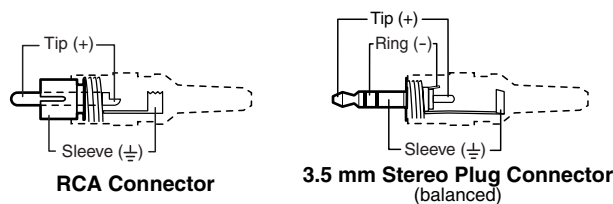


Figure 2-5 — Typical audio connectors

The audio level for each input can be individually set, via the front panel, the Ethernet link, or the RS-232 link, to ensure that the level on the output does not vary from input to input. See chapter 3, *Operation*, chapter 4, *Programmer's Guide*, chapter 5, *Switcher Software*, and chapter 6, *Ethernet Operation* for details.

Standard output connections

NOTE The two Program Video outputs, consisting of five BNC connectors and a 15-pin HD connector, output the identical video signal and the same sync format. The two Preview Video outputs are also identical to each other.

The Program connectors (④) output the video image for the program monitor or projector. The Preview connectors (⑤) output the video image for the local monitor.

- ④ **Preview and Program video output BNC connectors** — Connect RGB video displays to these female BNC connectors. Figure 2-6 shows how to connect the various video formats.
- ⑤

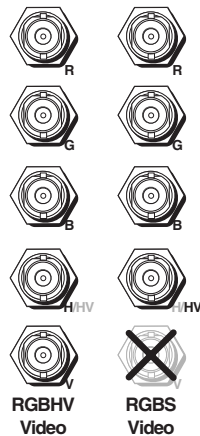



Figure 2-6 — BNC output connections for RGBHV and RGBS video

Program and Preview video output 15-pin HD connectors —

Connect RGB video displays to these two female 15-pin HD connectors. 

- ⑥ **Preview and Program audio output connectors** — Connect audio devices, such as an audio amplifier or powered speakers to these 3.5 mm, 5-pole captive screw connectors. The connectors output the selected unamplified, line level audio. See figure 2-7 to properly wire an output connector.
- ⑦

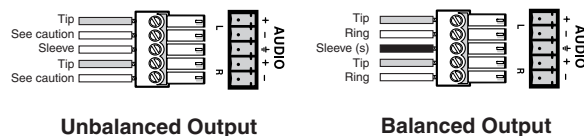


Figure 2-7 — Captive screw connector wiring for audio output

CAUTION Connect the sleeve to ground (Gnd). Connecting the sleeve to a negative (-) terminal will damage the audio output circuits.

By default, the audio output follows the video switch. Audio breakaway, commanded via the front panel, the Ethernet link, or the RS-232 link, allows you to select from any one of the audio input sources. See chapter 3, *Operation*, chapter 4, *Programmer's Guide*, chapter 5, *Switcher Software*, and chapter 6, *Ethernet Operation* for details.


Optional output connection

- ⑧ **DVI output connector (optional)** — If the optional DVI output card is installed, connect a DVI/DFP-compatible video display to this DVI connector. This connector outputs the program image only. For a DFP-compatible display, connect the display through a DVI-to-DFP adapter, part #26-497-01 (DVI [male] to DFP [female] adapter) or 26-498-01 (DVI [female] to DFP [male] adapter).

NOTE The DVI output's horizontal resolution is limited to either 1024 or 1280 pixels. The vertical resolution is the selected vertical resolution.

For output rates with horizontal resolutions of 1024 or below, the ISS DVI output is 1024 x {selected vertical rate}. For example, if the output resolution is set to 640 x 480, then the DVI output resolution is 1024 x 480.

For output rates with horizontal resolutions of 1280 or above, the ISS DVI output is 1280 x {selected vertical rate}.



Ethernet connection

- ⑨ **Ethernet port** — If desired connect the switcher to an Ethernet LAN or WAN via this RJ-45 connector. Ethernet control allows the operator to control the switcher from a remote location. When connected to an Ethernet LAN or WAN, the switcher can be accessed and operated from a computer running a standard Internet browser.

Ethernet connection indicators — The Link and Act LEDs indicate the status of the Ethernet connection.

LINK The Link LED indicates that the switcher is properly connected to an Ethernet LAN. This LED should light steadily.

ACT The Act LED indicates transmission of data packets on the RJ-45 connector. This LED should flicker as the switcher communicates.

Cabling and RJ-45 connector wiring

It is vital that your Ethernet cables be the correct cables, and properly terminated with the correct pinout.

Choosing a network cable

Ethernet links use Category (CAT) 3, 4, 5, 5e, or 6, unshielded twisted pair (UTP) or shielded twisted pair (STP) cables, terminated with RJ-45 connectors. Ethernet cables are limited to 328' (100 m).

NOTE Do not use standard telephone cables. Telephone cables will not support Ethernet or Fast Ethernet.

NOTE Do not stretch or bend cables. Transmission errors can occur.

The cable used depends on your network speed. The ISS supports both 10 Mbps (10Base-T — Ethernet) and 100 Mbps (100Base-T — Fast Ethernet), half-duplex and full-duplex, Ethernet connections.

- 10Base-T Ethernet requires at a minimum CAT 3 UTP or STP cable.
- 100Base-T Fast Ethernet requires at a minimum CAT 5 UTP or STP cable.

Wiring the network cable

The cable can be terminated as either a patch cable or a crossover cable (figure 2-8) and must be properly terminated for your application:

- **Patch (straight) cable** — Connection of the ISS to an Ethernet hub, router, or switcher that also hosts a controlling computer.
- **Crossover cable** — Direct connection between the ISS and a controlling computer.

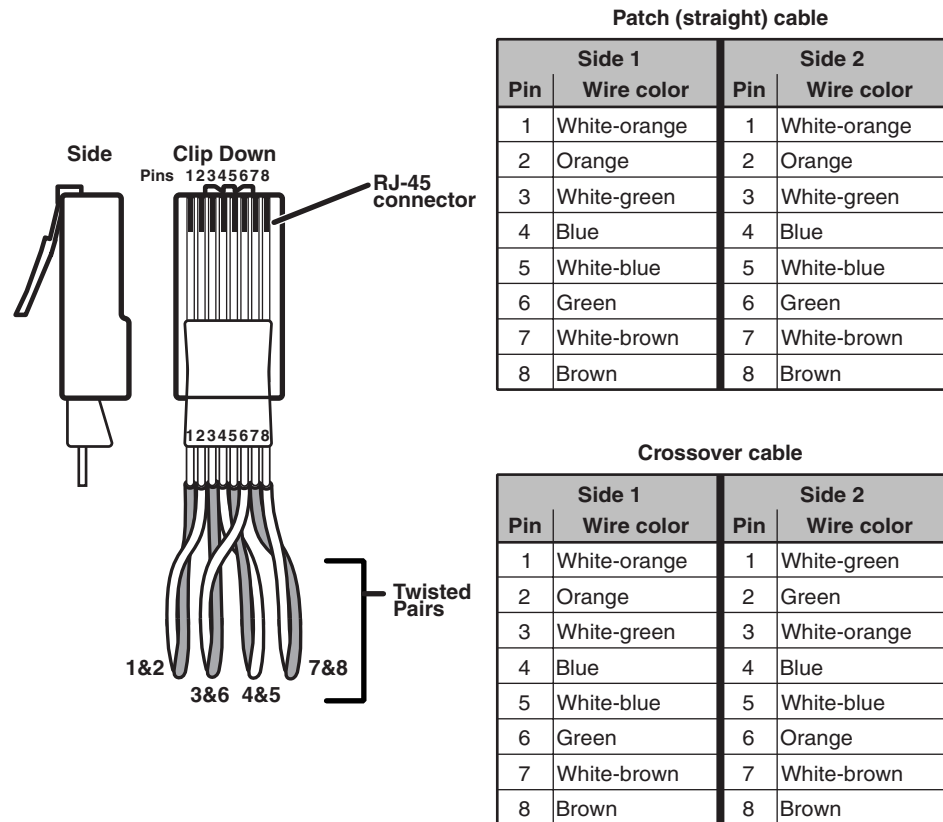


Figure 2-8 — RJ-45 connector pinout table

RS-232 connection

- ⑩ **Remote port** — Connect a host device, such as a computer or touch panel control, to the Integration Seamless Switcher via this 9-pin D connector for serial RS-232 control (figure 2-9).

Pin	RS-232	Function
1	—	Not used
2	TX	Transmit data
3	RX	Receive data
4	—	Not used
5	Gnd	Signal ground
6	—	Not used
7	—	Not used
8	—	Not used
9	—	Not used




Figure 2-9 — Remote port pin assignments

See chapter 4, *Programmer's Guide*, for definitions of the SIS commands and chapter 5, *Switcher Software* to install and use the control software.

Configuration

The ISS can be configured using either the front panel controls, the SIS, or the Windows Control program. See chapter 3, *Operation*, chapter 4, *Programmer's Guide*, and chapter 5, *Switcher Software*.



Integration Seamless Switcher

Chapter Three

Operation

Front Panel Controls and Indicators

Front Panel Operations

Optimizing the Video

Optimizing the Audio

Troubleshooting

Operation

Front Panel Controls and Indicators

All of the switcher's controls and indicators are on the front panel (figure 3-1). A label window above the input buttons can be labeled with text and/or graphics. The 20 x 4 LCD display indicates the switcher status, menu selections, the data rate, and the status of additional system features.

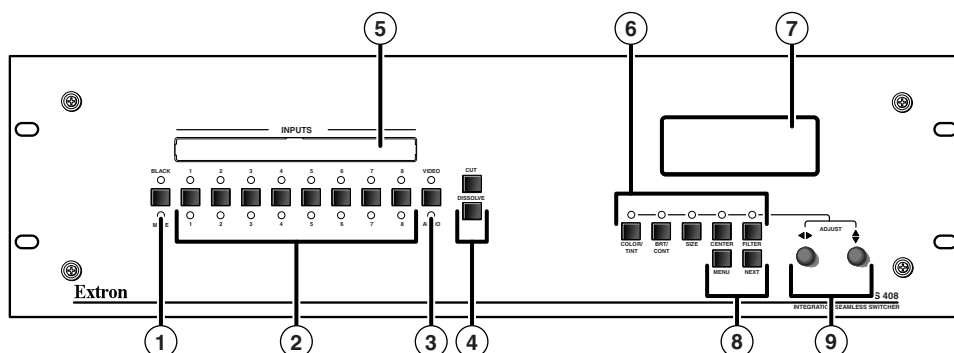


Figure 3-1 — Integration Seamless Switcher front panel

Black/Mute, input selection, and Cut/Dissolve controls

- ① **Black/Mute button and LEDs** — The Black/Mute button switches the program output to a black screen and/or muted audio. The black screen and/or mute audio is deselected when a cut or dissolve is selected to switch the preview output to the program output.
- ② **Input selection buttons** — The Input 1 through 8 buttons select the associated input to scale and display on the preview monitor.

Input selection LEDs — The green Input 1 through 8 LEDs above the input buttons indicate the video selection. The red Input 1 through 8 LEDs below the input buttons indicate the audio selection.

Flashing LED(s) (green for video and red for audio) indicate the input selected for the preview output. Solid LED(s) indicate the input selected for the program output. If there are no flashing LEDs, the same input is selected for the preview and program outputs.

- ③ **Video/Audio button** — The Video/Audio button selects video, audio, video and audio, or neither for input selection.

Video and Audio LEDs — The green Video LED and red Audio LED indicate whether video, audio, video and audio, or neither will be selected using the Input buttons and indicated by the Input LEDs (②).

Figure 3-2 shows the sequence displayed by the LEDs when you cycle through video and/or audio selection by pressing the Video/Audio button.

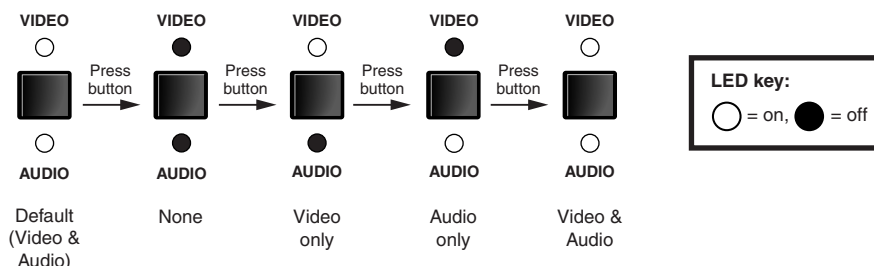


Figure 3-2 — Video and/or audio selection cycle

- ④ **Cut button** — Pressing the Cut button causes the ISS to immediately switch the input selected as the preview output to the program output, with no switching effects added. If black screen and/or mute audio is selected for the program output, it is deselected when a cut is selected.

Dissolve button — Pressing the Dissolve button causes the ISS to switch the input selected as the preview output to the program output using the dissolve effect. If black screen and/or mute audio is selected for the program output, it is deselected when a dissolve is selected.

- ⑤ **Input label panel** — This translucent panel can be removed and replaced to insert a label behind the panel. To remove the panel, insert the Philips-head end of an Extron Tweeker or small Philips-head screwdriver into the hole in one end of the panel, and gently slide the tab on the edge of the panel out of the recess in the switcher housing.

Input labels can be created easily with Extron's button label generator software, which ships with every Extron ISS, or with any Brother® P-Touch™ labeler. Each input can be labeled with names, alphanumeric characters, or even color bitmaps for easy and intuitive input and output selection (figure 3-3). See chapter 5, *Switcher Software*, for details on using the label software.

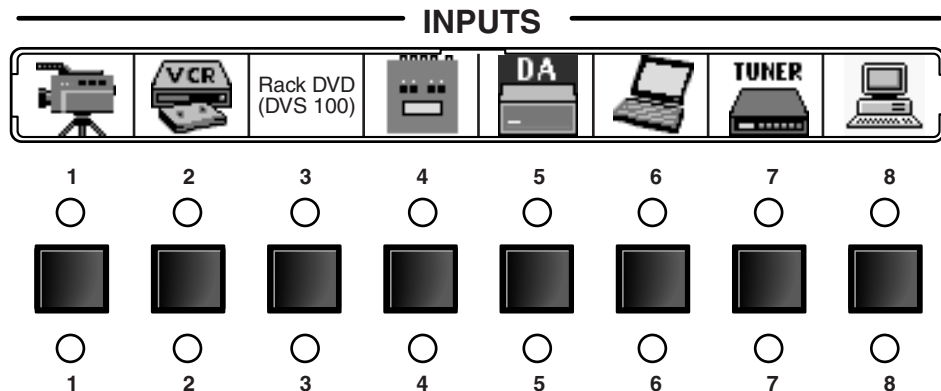


Figure 3-3 — Sample label

Picture adjustment and menu system controls

- ⑥ **Picture Adjustment buttons and LEDs** — The picture adjustment buttons select individual image adjustments that are adjusted using the Adjust ◀ and Adjust ▶ knobs (⑨). The LEDs above these buttons light when the button is pressed.

Color/Tint control button — The Color/Tint button selects the display color and tint adjustments. The color adjustment range is from 0 to 127. The tint adjustment range is from 0 to 255. See *Picture adjustments* in this chapter.

NOTE The Color/Tint control affects only composite video and S-video inputs.

Brightness/Contrast control button — The Brightness/Contrast button selects the display brightness and contrast adjustments. The adjustment range for both brightness and contrast is from 0 to 63. See *Picture adjustments* in this chapter.

Size control button — The Size button selects the display size adjustment. The adjustment range depends on the output resolution selected. See *Picture adjustments* in this chapter.

Operation, cont'd

Center control button — The Center button selects the display centering adjustment. The adjustment range depends on the output resolution selected. See *Picture adjustments* in this chapter.

Filter control (Detail) button — The Detail button selects the display image detail (sharpness) adjustment. There are separate horizontal and vertical filters for RGB and component video. There is a single filter for S-video and composite video. The sharpness adjustment compensates for long cable runs. See *Picture adjustments* in this chapter.

- **For RGB and component video**, the Adjust ◀ knob controls the horizontal filter and the Adjust ▶ knob controls the vertical filter. The adjustment range for the horizontal filter is from 0 to 3. The adjustment range for the vertical filter is from 0 to 7.
- **For S-video and composite video**, either Adjust knob controls the filter setting. The range of the adjustment is from 0 to 7.

⑦ **Status display** — The 20-column by 4-line LCD displays configuration menus and status information. See *Front Panel Operations* in this chapter for details.

⑧ **Menu button** — The Menu button enters and moves through the main menu system in the ISS. See *Front Panel Operations* in this chapter for details.

Next button — The Next button steps through the submenus in the ISS menu system. See *Front Panel Operations* in this chapter for details.

⑨ **Adjust ◀ (horizontal) and Adjust ▶ (vertical) knobs** — The Adjust ◀ and Adjust ▶ knobs change settings when used in conjunction with the picture adjustment buttons or the menu system. Rotate these knobs to change picture settings when one of the picture adjustment buttons is selected. In the menu system, rotate these knobs to scroll through the selection options and make adjustments.

Front Panel Operations

The following paragraphs detail the power-up process and then describe input selection, preset selection, Auto-Imaging, and then details the menu system, the picture adjustments, and selection of executive mode.

Power-on indications

Power is automatically applied when the power cord is connected to an AC source. When AC power is applied, the switcher performs a self-test that blinks all of the front panel LEDs and then lights only the LEDs for the inputs previously selected for the preview output (blinking LED[s]) and program output (solid LED[s]). The self-test also displays the model name, part number, and the firmware version in the LCD display. After approximately 2 seconds, the LCD reverts to its default display cycle, alternating between two displays; one showing the selected program and preview inputs and their rates, and the other showing the selected output rate (figure 3-4). An error-free power up self-test sequence leaves all of the LEDs, with the exception of the selected input's LED, off and the LCD displaying the default display cycle.

The selected preview and program inputs, the picture adjustments, and other current settings are saved in nonvolatile memory. When power is applied, the latest configuration is retrieved.

NOTE On figure 3-4 and all other flowcharts in this chapter, solid lines indicate screen changes initiated by the operator. Dashed lines indicate screen changes that are the result of a timeout function.

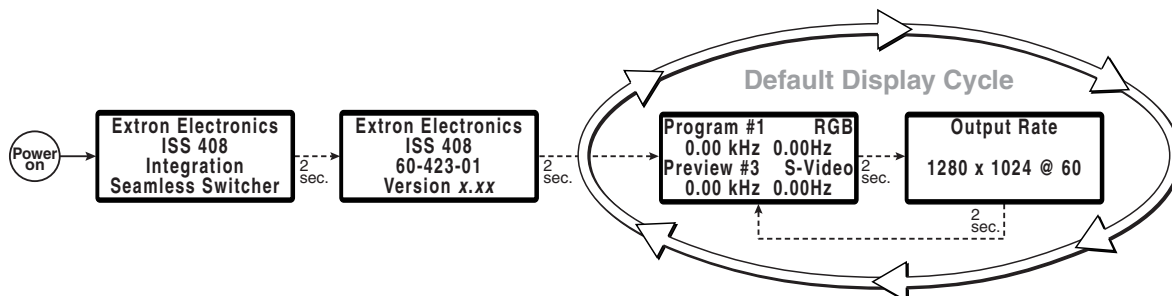


Figure 3-4 — LCD power up and default display cycle

Selecting an input and switching it to the program output

1. Press and release the Video/Audio button as necessary to select either video and audio, video only, or audio only (figure 3-5).


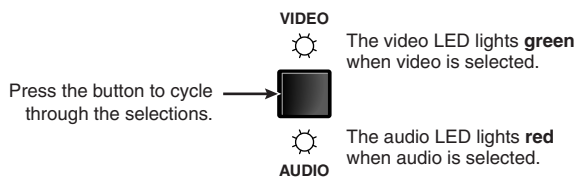


Figure 3-5 — Selecting video and audio

2. Press and release an input button (figure 3-6).

Press and release the input 3 button.
The Input 3 video (upper) LED and Input 3 audio (lower) LED blink to indicate that the **video** and **audio** inputs are selected, the video is scaled, and output as the preview output.

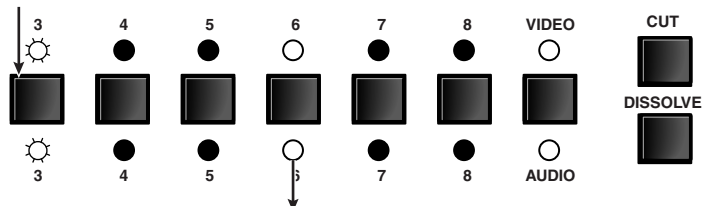

The Input 6 video (upper) LED and Input 6 audio (lower) LED remain lit steadily to indicate that the **video** and **audio** inputs are selected, the video is scaled, and output as the program output.

LED key:
○ = on, ◐ = blinking, ● = off

Figure 3-6 — Selecting an input

Operation, cont'd

3. Press and release either the Cut or Dissolve button.

Cut button — The ISS immediately switches the input selected as the preview output to the program output, with no switching effects added (figure 3-7).

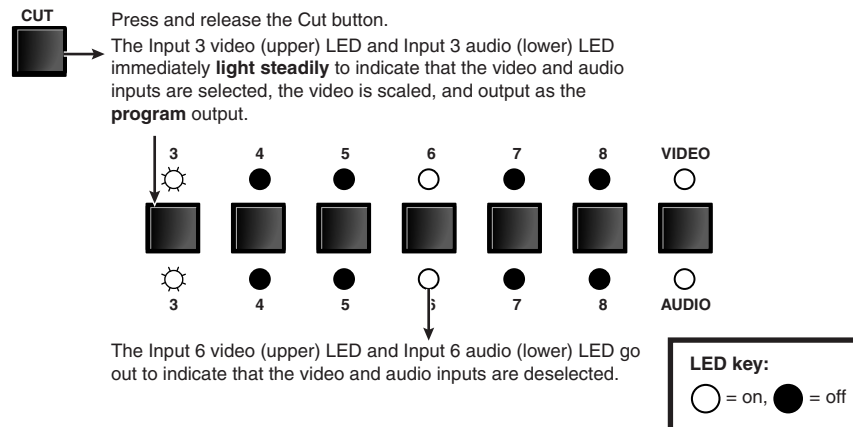


Figure 3-7 — Cutting to the selected input

Dissolve button — The ISS switches the input selected as the preview output to the program output using the dissolve effect (figure 3-8).

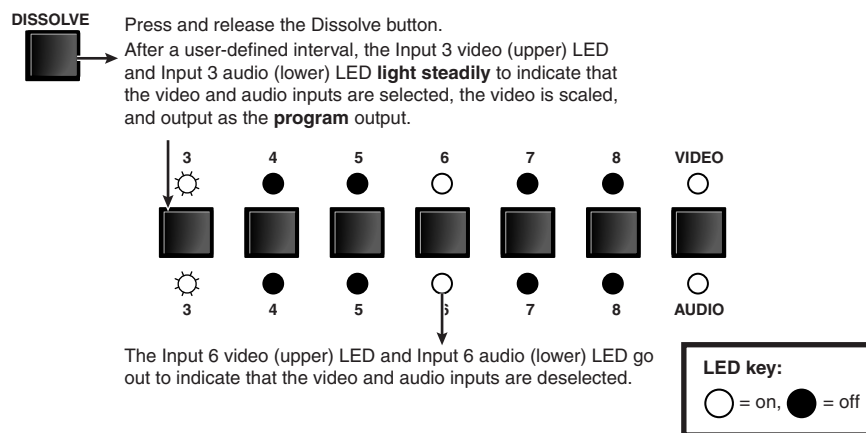


Figure 3-8 — Dissolving to the selected input

Recalling a user preset

There are three user presets per input. The presets save color, tint, contrast, brightness, detail, sizing, and centering settings. See *User Presets menu* later in this chapter to save and erase presets. Cycle through and recall these memories by repeatedly pressing the appropriate input button. The LCD panel identifies the recalled preset (figure 3-9).

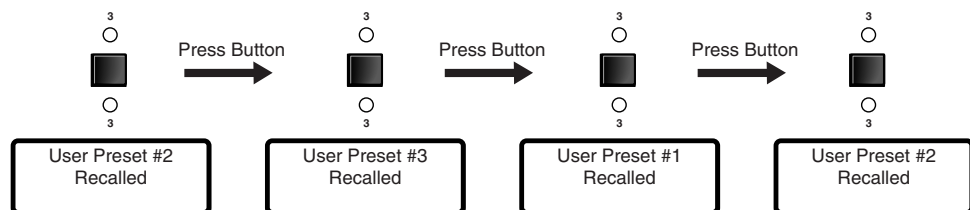


Figure 3-9 — Recalling user presets

Auto imaging an input

The auto imaging feature automatically sizes and centers the selected input to fill the screen. Command the auto imaging feature for a specific input by pressing and **holding** the appropriate input button until the LCD displays the message **Auto Image Input #*n***, releasing the input button, and then pressing and releasing the input button again. The LCD displays **AutoSizing and Centering Please Wait...** until the operation is complete. Alternatively, using the menu system, this feature can be set to apply the Auto Image adjustments to every input as it is selected (see *Auto Imaging and Auto Memories submenu* later in this chapter).

Menu system overview

Figure 3-10 shows a flowchart of the main menus in the menu system.

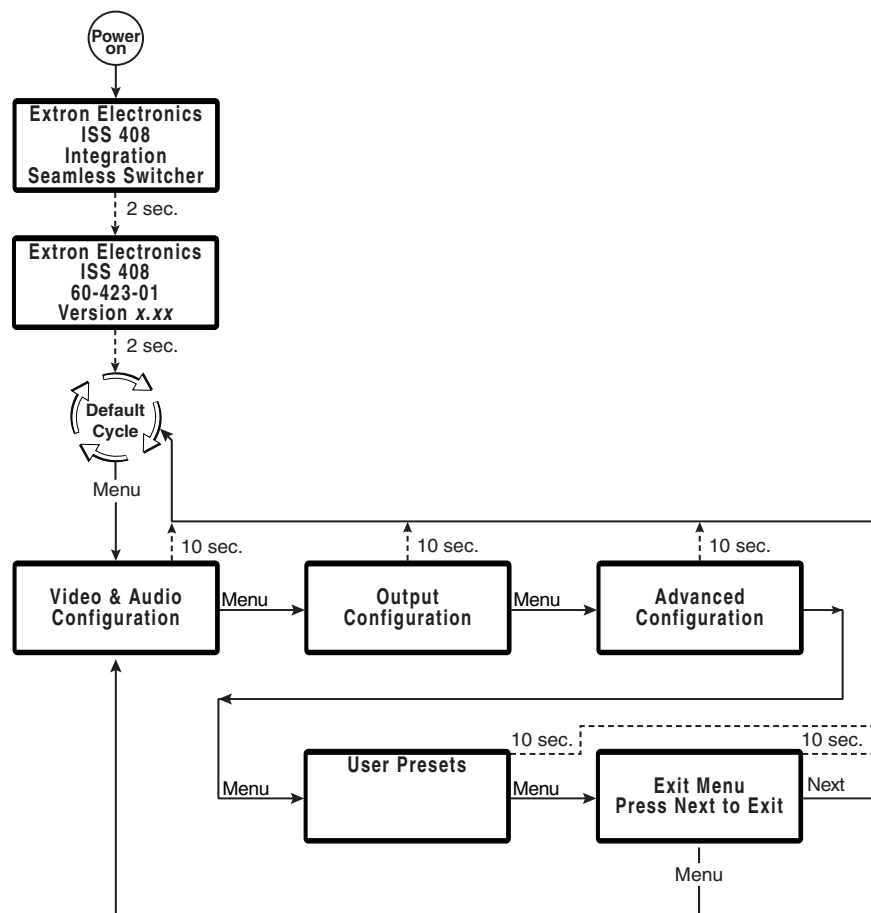


Figure 3-10 — Menu system flowchart

Menu button — Press the Menu button to activate the menu system and to scroll through the five main menus.

Next button — Press the Next button to move between the submenus of a selected main menu, to activate one for viewing or configuration, and to save a selection. Pressing the Next button during input configuration causes the current input's number and format type to be displayed on the LCD.

Adjust ◀▶ and Adjust ⬆⬇ knobs — When in a submenu, rotate the Adjust ◀▶ knob and Adjust ⬆⬇ knob to scroll through the submenu options and select a setting. Refer to the flowcharts in this chapter and to specific sections for explanations on knob adjustments.

NOTE If you press the Menu button while a main menu or a submenu is active, the next main menu becomes active. For example, the display changes from the Video & Audio Configuration main menu or the Input Configuration submenu to the Output Configuration main menu.

NOTE To return to the default screens, let the switcher remain idle for 10 seconds until the selected screen times out, or press the Menu button until the Exit Menu appears, then press the Next button.

NOTE From any menu or submenu, after 10 seconds of inactivity, the ISS saves all adjustment settings and times out to the default LCD display cycle.

Video & Audio Configuration menu

Figure 3-11 is a flowchart that shows an overview of the Video & Audio Configuration menu and the available settings.

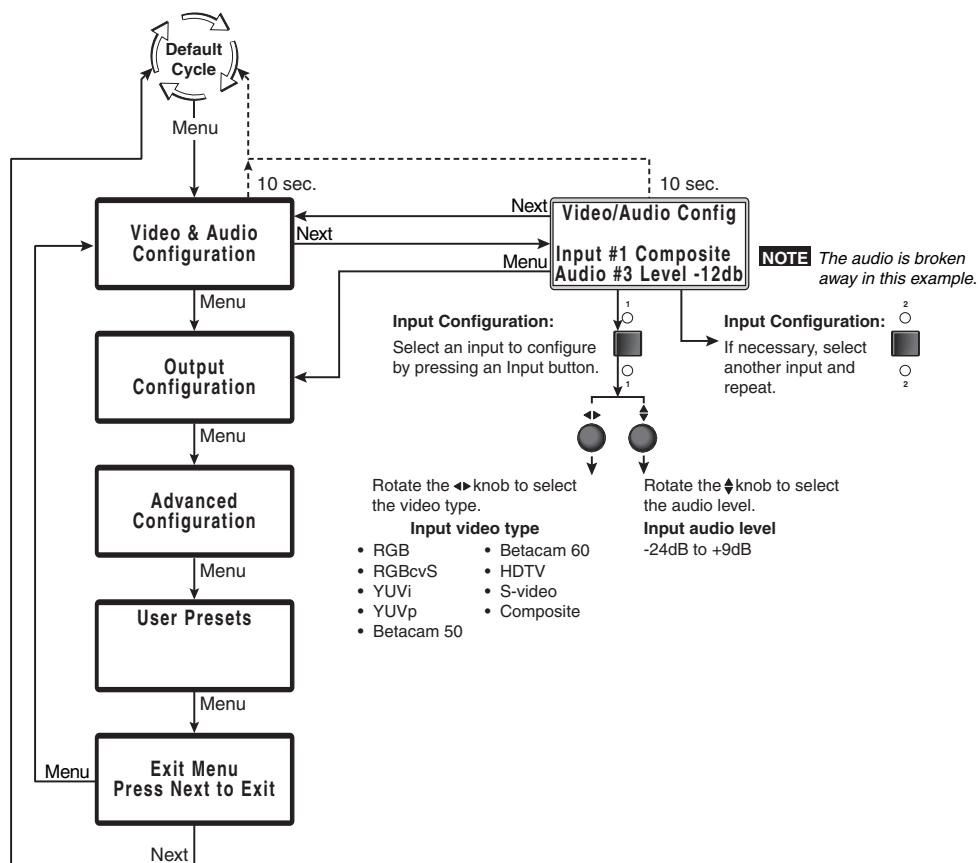


Figure 3-11 — Input Configuration menu flowchart

Input Configuration submenu

Select an input to configure by pressing and releasing an input button. Rotate the Adjust ◀ knob while in the Input Configuration submenu to select the correct video format (RGB, RGBcvS, YUVi, YUVp, Betacam 50, Betacam 60, HDTV, S-video, or composite video) for the selected input. Rotate the Adjust ▶ knob to select the audio gain or attenuation value, from -24 dB to +9 dB. The default for each input is RGB video and a 0 dB audio level.

Operation, cont'd

Output Configuration menu

Figure 3-12 is a flowchart that shows an overview of the Output Configuration menu, the submenus, and the available settings.

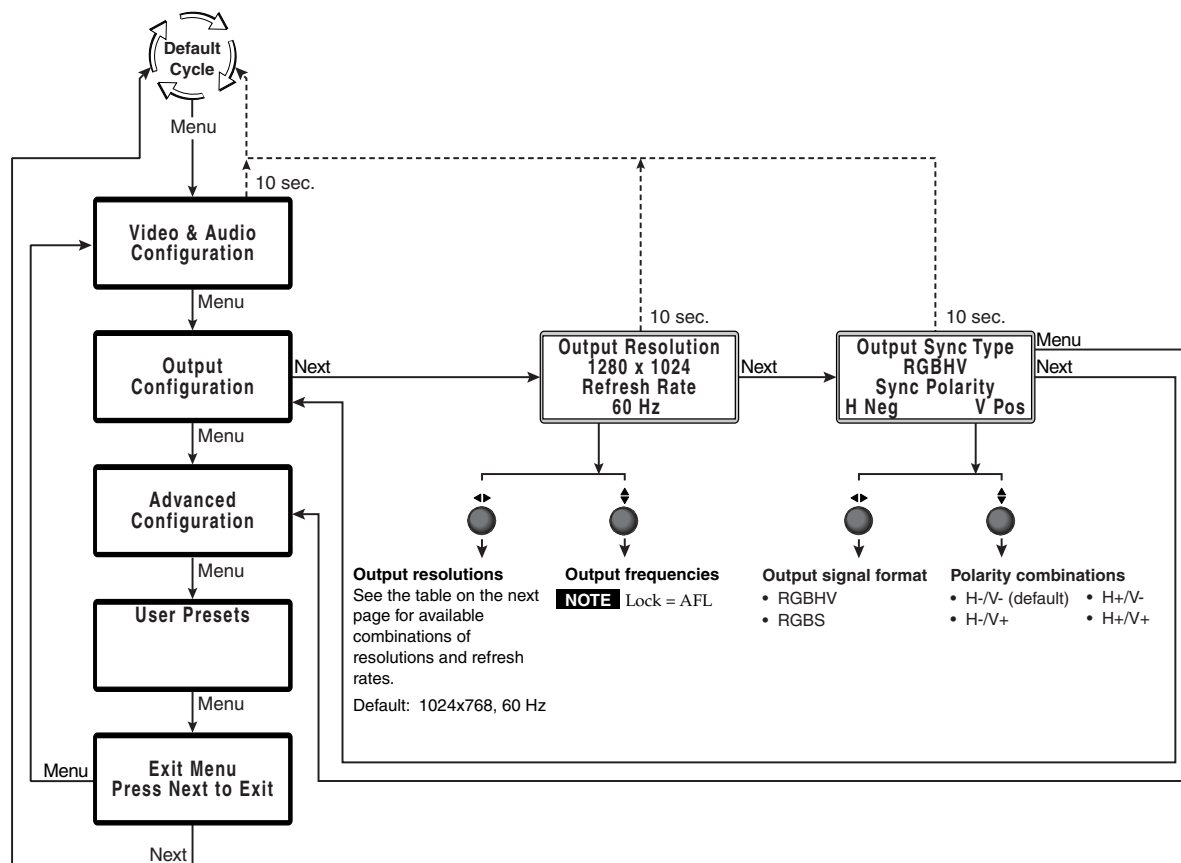


Figure 3-12 — Output Configuration menu flowchart

Output Resolution submenu

Rotate the Adjust ◀▶ knob while in this submenu to select one of the available output resolutions.

Rotate the Adjust ⬆⬇ knob while in this submenu to select one of the available refresh (vertical scanning) rates. Selecting Lock enables the Extron Accu-RATE Frame Lock (AFL) feature. Accu-RATE Frame Lock eliminates image tearing and other artifacts of scaling motion video by eliminating frame rate conversion. It exactly matches the output rate of the ISS to the frame rate of input 1. Select this feature if you will be using motion video sources with a display that is capable of a variety of refresh rates. AFL is compatible with 50 Hz and 60 Hz only.

The default resolution and rate is 1024 x 768 @ 60 Hz.

Resolution	50 Hz	56 Hz	60 Hz	75 Hz	85 Hz	Lock at 50/60 Hz†
640 x 480	108, 408		108, 408	108, 408		108, 408
800 x 600	108, 408		108, 408	108, 408		108, 408
832 x 624			108, 408	108, 408		108, 408
848 x 480			108, 408			108, 408
852 x 480			108, 408			108, 408
1024 x 768*	108, 408		108, 408	108, 408	108, 408	108, 408
1280 x 768*		408 only				408 only
1280 x 1024*	408 only		408 only			
1360 x 765			408 only			408 only
1365 x 1024			408 only			408 only
1400 x 1050	408 only		408 only			408 only
576p HDTV	408 only					408 only
720p* HDTV @ 60 Hz only			408 only			408 only
1080p HDTV @ 60 Hz only			408 only			408 only
1080i HDTV	408 only		408 only			408 only

* Native DVI output resolution.

† The output refresh rate is auto-selected, based on the video refresh rate of input 1.

NOTE The optional DVI program output's horizontal resolution is limited to either 1024 or 1280 pixels. The vertical resolution is the selected vertical resolution.

For output rates with horizontal resolutions of 1024 or below, the ISS DVI output is 1024 x {selected vertical rate}. For example, if the output resolution is set to 640 x 480, then the DVI output resolution is 1024 x 480.

For output rates with horizontal resolutions of 1280 or above, the ISS DVI output is 1280 x {selected vertical rate}.

Resolutions marked with an asterisk (*) in the table above are native DVI outputs, meaning that the DVI output fully supports the selected horizontal and vertical resolution. The DVI output resolution exactly matches the analog resolution.

Sync Type and Polarity submenu

Rotate the Adjust ◀▶ knob while in this submenu to select the output video type (RGBHV or RGBS).

The display or projector may require a particular combination of horizontal (H) and vertical (V) sync signal polarities. Select the appropriate combination of positive or negative H and V sync by rotating the Adjust ⬆ knob.

Operation, cont'd

Advanced Configuration menu

Figure 3-13 is a flowchart that shows an overview of the Advanced Configuration menu, the submenus, and the available settings.

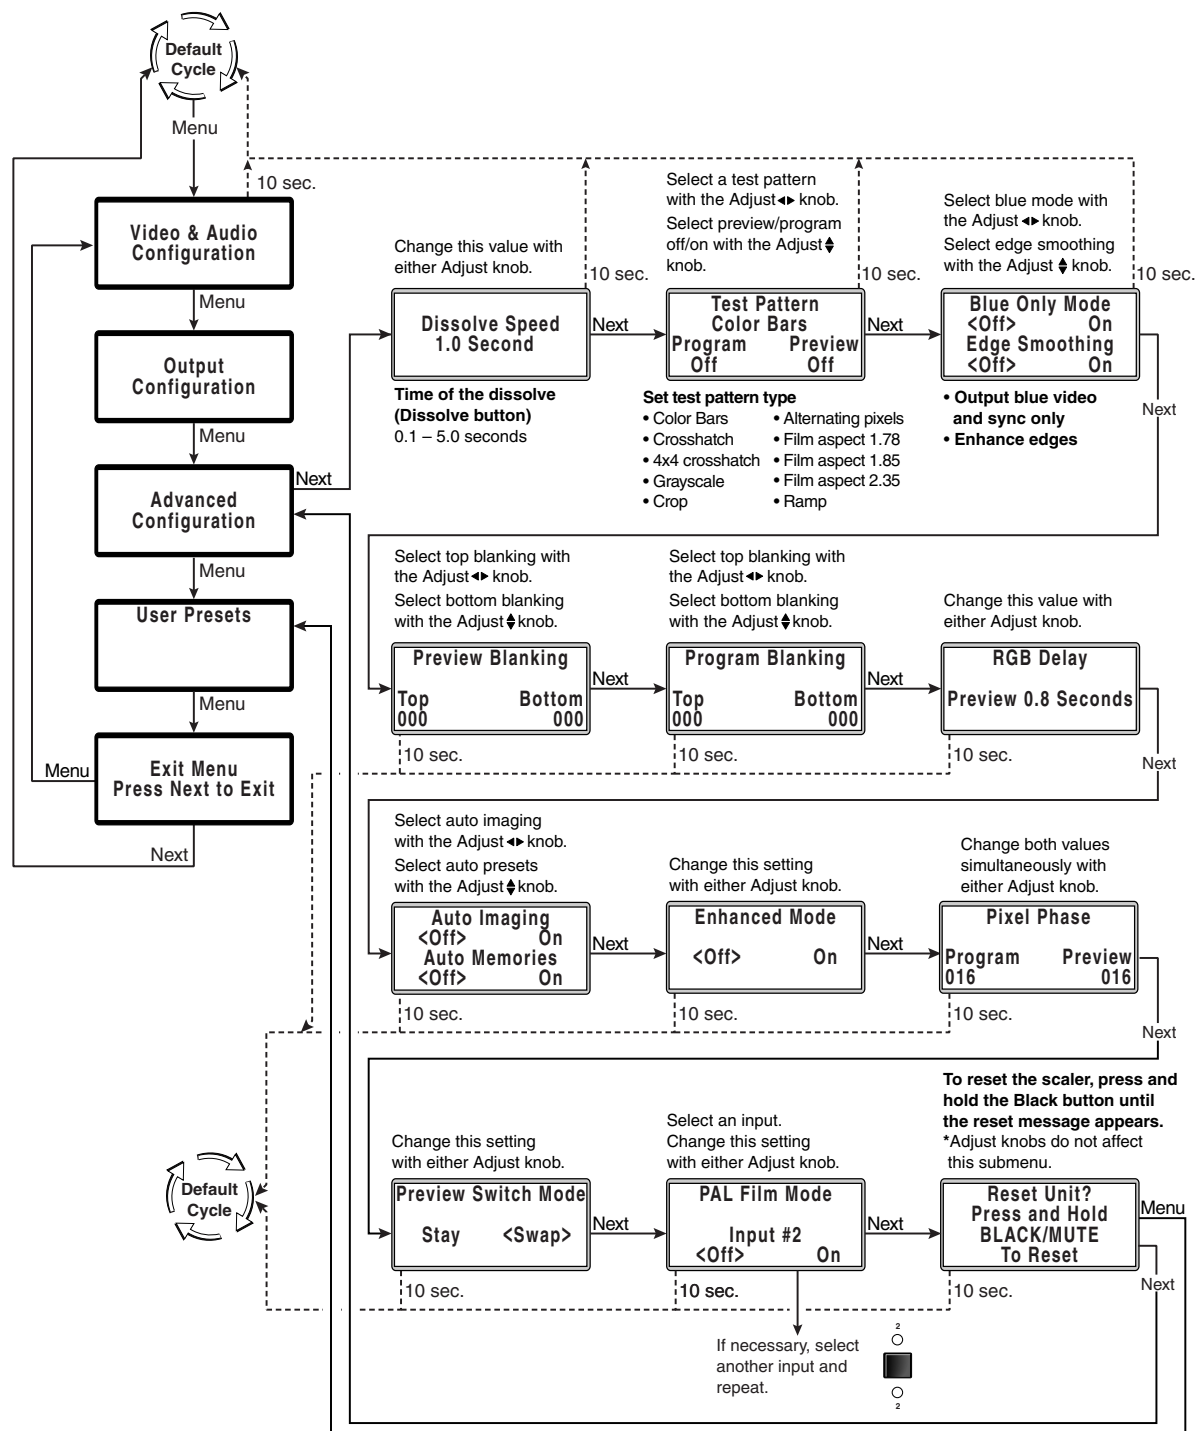


Figure 3-13 — Advanced Configuration menu flowchart

Dissolve Speed submenu

The Dissolve Speed submenu displays and allows you to set the duration of the dissolve effect when switching the preview output to the program output.

Use either the Adjust ◀ knob or the Adjust ▶ knob to select the dissolve speed from 0.1 seconds to 5.0 seconds in 0.1 second steps. The default is 1.0 seconds.

Test Pattern submenu

The Test Pattern submenu lets you select from among several test patterns and assigns the selected pattern to an output. The test patterns are helpful when adjusting the connected displays for color, convergence, focus, resolution, contrast, grayscale, and aspect ratio.

Use the Adjust ◀ knob to select a test pattern. The options are: Color Bars, crosshatch, 4 × 4 crosshatch, grayscale, crop, alternating pixels, film aspect ratios 1.78, 1.85, 2.35, and ramp.

Use the Adjust ▶ knob to assign the output(s) for the selected test pattern. Select among neither output (both off), the preview output, the program output, or both outputs.

Blue Only Mode and Edge Smoothing submenu

The Blue Only Mode and Edge Smoothing submenu lets you turn the blue mode and edge smoothing features on and off. Blue-only mode is helpful in the setup of the color and tint of the incoming video signal. In the blue-only mode, only the sync and blue video signals are passed to the display. Edge enhancement mode smooths edges of a picture by minimizing the differences between pixels.

Use the Adjust ◀ knob to turn blue-only mode On or Off. The default is Off.

Use the Adjust ▶ knob to turn edge enhancement mode On and Off. The default is Off.

Preview and Program Blanking submenus

The Preview Blanking submenu and Program Blanking submenu allow you to adjust the top and bottom line blanking on the preview and program monitors within a range of 0 to 200 lines. During scaling, captioning and tapehead switching in the video's blanking area may show up as picture noise. Using blanking, you can add black lines at the top and bottom edges of the image to eliminate edge noise.

Use the Adjust ◀ knob to increase or decrease the top line blanking. The default is 0 lines.

Use the Adjust ▶ knob to increase or decrease the bottom line blanking. The default is 0 lines.

RGB Delay submenu

The RGB Delay submenu displays and lets you set the RGB delay when switching a selected input to the preview output. With RGB delay, sync is never removed from the preview display. Rather, the ISS blanks the RGB (video) outputs while the scaler locks to the new sync, and then switches the RGB signals. This allows a brief delay for the displays to adjust to the new sync timing before displaying the new picture, which will appear without glitches. RGB delay is also known as Triple-Action Switching™ or video mute switching.

Use either the Adjust ◀ knob or the Adjust ▶ knob to select the blanking period (RGB delay time) from 0 seconds to 5 seconds in 0.1 second steps. The default is 0.2 seconds.

Auto Imaging and Auto Memories submenu

The Auto Imaging and Auto Memories menu provides a means to turn the auto imaging and auto presets features on or off for all input selections.

If auto imaging is set to on, the ISS automatically sizes and centers the selected input to fill the screen when a new frequency is input. If auto imaging is set off, the ISS sizes and centers the selected input only when it is commanded using the input button, see *Auto imaging an input*, earlier in this chapter. Rotate the Adjust ◀▶ knob to toggle auto imaging on or off for all input selections.

The auto memories feature saves and recalls centering, sizing, and filtering information, based on the input frequency. Auto memory settings may conflict with user preset settings. When you use a control system to switch inputs and then recall a user memory, the delay in recalling the auto memory settings could result in the recalled auto memory settings overwriting the recalled user memory settings. To prevent this conflict, turn auto memories off. Rotate the Adjust ⬆ knob to toggle auto memories on or off.

Enhanced Mode submenu

The Enhanced Mode submenu provides a means to turn enhanced mode on or off. Enhanced mode is an automatic gain control for S-video or composite video input signals scaled and applied to the program output. If the input signal level is too weak, the signal gain is increased; if the input signal level is strong, the signal gain is decreased.

Use either the Adjust ◀▶ or the Adjust ⬆ knob to select among enhanced mode off or on for the program output. The default is Off.

NOTE *Enhanced mode is only effective for S-video and composite video input signals.*

Pixel Phase submenu

The Pixel Phase submenu displays and lets you set the pixel phase, which is the timing of the digital scaler's sampling. Sampling at the optimum pixel phase results in a brighter scaled output.

Use either the Adjust ◀▶ or the Adjust ⬆ knob to select the pixel phase for both outputs simultaneously from 0 to 31. The default is 16.

Preview Switch Mode submenu

The Preview Switch Mode submenu lets you set the way the preview output responds to the cut or dissolve operation.

- **Stay mode** — When you initiate either a cut or dissolve operation, the video and audio signals on the preview output are applied to the program output (figure 3-14) and also continue to be applied to the preview output until another input is selected.

The video input switches between the switcher's two internal scalers, resulting in a switching report being issued on the RS-232 port (see *Switcher-Initiated Messages* in chapter 4, *Operation*).

- **Swap mode** — When you initiate either a cut or dissolve operation, the preview and program outputs are swapped (figure 3-14). The video and audio signals on the preview output are applied to the program output. The video and audio signals that had been applied to the program output are applied to the preview output.

Each of the switcher's two internal scalers retains the same video inputs; only the outputs are swapped. No switching report is issued on the RS-232 port (see *Switcher-Initiated Messages* in chapter 4, *Operation*).

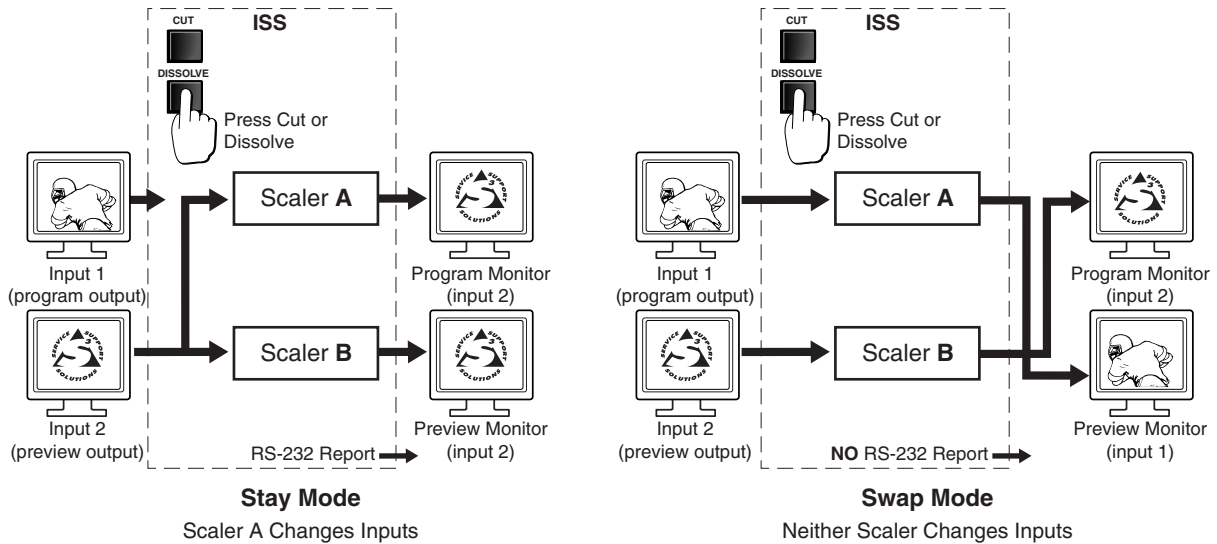


Figure 3-14 — Stay mode and swap mode

Use either the Adjust ◀ knob or the Adjust ▶ knob to select Stay or Swap.

PAL Film Mode submenu

The PAL Film Mode submenu lets you turn PAL film mode (2:2 pulldown detection) on and off for the selected input. The PAL film mode should be used for a video source that is PAL video that originated from film. PAL film mode applies video processing algorithms that optimize the conversion of video that was made with the 2:2 pulldown (PAL video from film) process.

Use either the Adjust ◀ knob or the Adjust ▶ knob to select On or Off. Select other inputs as necessary to configure.

Reset submenu

The Reset submenu resets the ISS 108 or ISS 408 to the default values. Reset the switcher by pressing and **holding** the Black/Mute button while this submenu is active. The LCD displays **Unit Reset to Factory Defaults** when the reset is complete. Release the Black/Mute button.

User Presets menu

Figure 3-15 is a flowchart that shows an overview of the User Presets menu, the Save Preview Preset and Erase Preview Preset submenus, and the available settings.

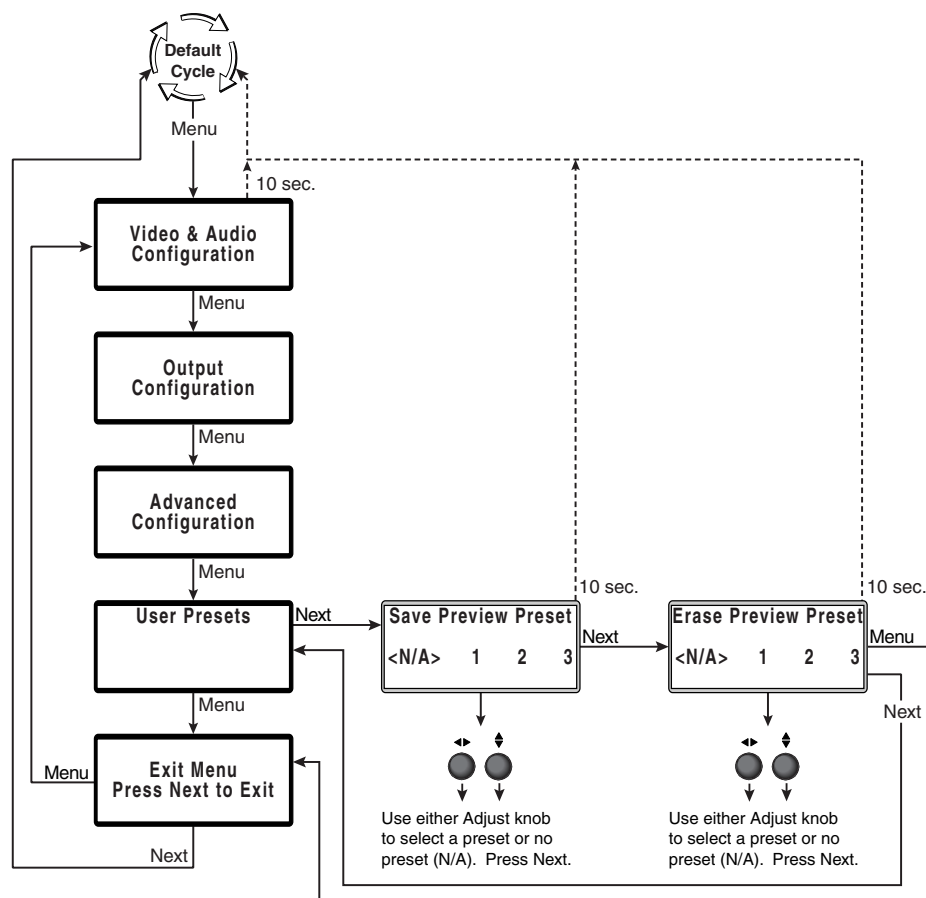


Figure 3-15 — User Presets menu flowchart

Save Preview Preset submenu

Rotate either the Adjust ◀ or the Adjust ▶ knob while in the Save Preview Preset submenu to highlight (< >) one of three memory presets for the selected input or highlight N/A for no preset. Press the Next button to save the current settings to the selected preset. Select N/A and press the Next button to exit without saving the settings.

User presets, which are saved values of the current color, tint, contrast, brightness, detail, sizing, and centering settings, are saved in nonvolatile memory; when the ISS is powered down and later powered back up, the settings are available for selection. Saving the settings to a preset overwrites the settings previously written to that preset.

NOTE

The color, tint, contrast, brightness, detail, sizing, and centering settings are tailored for the selected output rate. If you change the output rate and then recall a preset for the earlier rate, the adjustments recalled in the preset have no effect on the video output. However, if you then change back to the earlier output rate, the effects of the adjustments appear on the screen if they were not overwritten for the old output rate.

User presets are recalled using the Input buttons. See *Input buttons* earlier in this chapter for instructions on recalling a user preset.

Erase Preview Presets submenu

Rotate either the Adjust \blacktriangle or the Adjust \blacktriangleright knob while in the Erase Preview Presets submenu to highlight (< >) one of three user presets to erase or highlight N/A for no preset. Press the Next button to erase the user preset. Highlight N/A and press the Next button to exit without erasing the presets.

Exit menu

From the Exit menu (figure 3-16), press the Next button to return to the default display cycle, or press the Menu button to return to the Video & Audio Configuration menu.

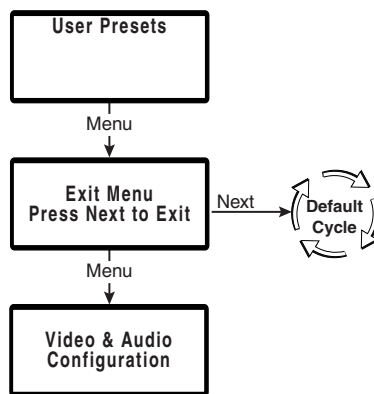



Figure 3-16 — Exit menu flowchart

Operation, cont'd

Picture adjustments

The picture adjustments allow you to fine tune the image quality of the selected input. When you press one of the Picture Adjustments buttons (Color/Tint, Brightness/Contrast, Size, Center, or Filter) once, the corresponding image adjustment menu for the preview image appears on the LCD screen. Press the button again, and the corresponding image adjustment menu for the program image appears. In either screen, adjustments can then be made by rotating the Adjust ◀ knob or the Adjust ▶ knob. Picture adjustment settings are stored in nonvolatile memory; when the switcher is powered down and powered up, the settings are restored.

Adjust an image for centering, sizing, brightness, contrast, color, tint, zoom, or detail as follows (figure 3-17).

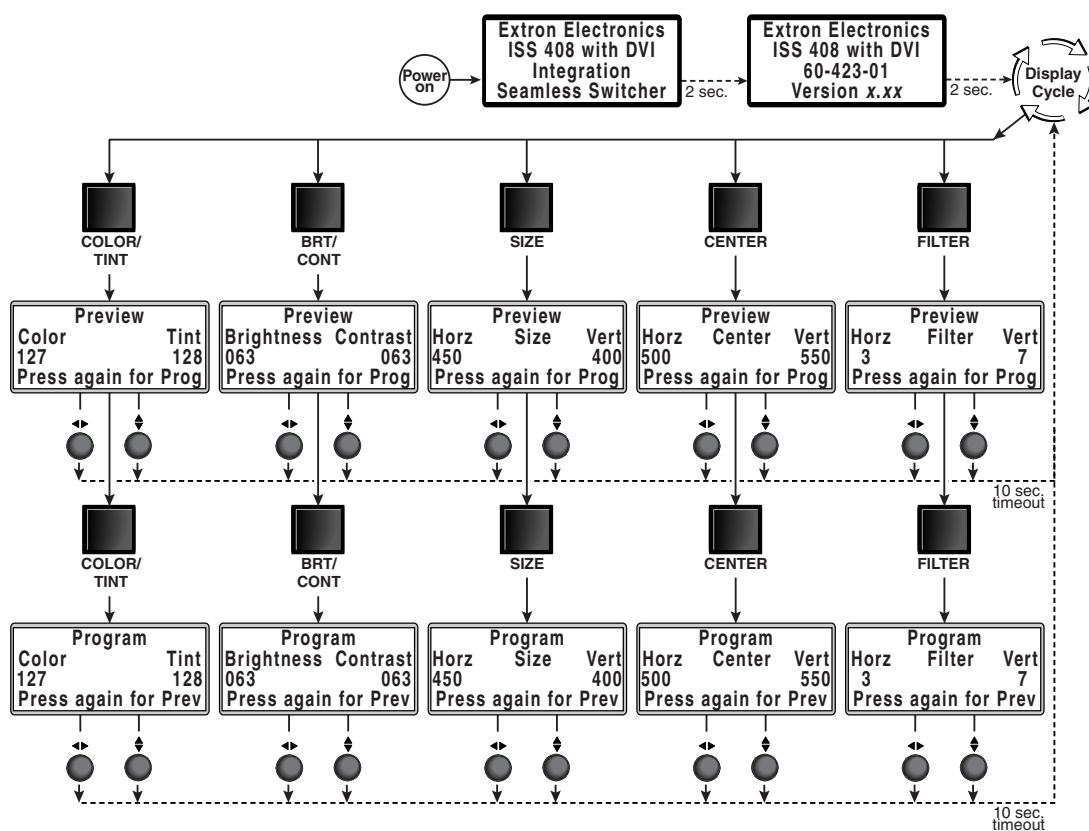

NOTE The Adjust ◀ knob and the Adjust ▶ knob are used to adjust the image settings on the left and right sides of the LCD screen, respectively.

Figure 3-17 — Picture adjustments flowchart

1. Press the desired input button to select the input to adjust.

NOTE The adjustments are made to the input signal as it is switched to the output (preview or program) shown in the LCD only. The adjustments do not affect the same input switched to the other output.

NOTE Color adjustments are available only for component video, S-video, and composite video inputs.

Tint adjustments are available only for S-video and composite video inputs.

2. Press the appropriate picture adjustment button: color and tint (Col/Tnt), brightness and contrast (Brt/Cont), sizing (Size), centering (Center), or filter. The LCD display shows the name of the adjustment and the current setting value.
3. Rotate the Adjust ◀ knob or the Adjust ▶ knob to vary the settings within the following adjustment ranges:

NOTE *The Adjust knobs have no mechanical limits to their rotation.*

- **Color/Tint:** Color adjusts within a range from 0 to 127.
Tint adjusts within a range from 0 to 255.
 - **Brightness/Contrast:** The range for both adjustments is 0 to 63.
 - **Size:** Observe the display and turn the Adjust ◀ knob to increase or decrease the horizontal size of the image. Turn the Adjust ▶ knob to increase or decrease the vertical size of the image. The adjustment range depends on the output resolution selected.
 - **Center:** Observe the display and turn the Adjust ◀ knob to center the image horizontally or the Adjust ▶ knob to center the image vertically. The adjustment range depends on the output resolution selected.
 - **Horizontal and vertical filter (RGB or component video input):**
Horizontal (Horz) adjusts within a range from 0 to 3.
Vertical (Vert) adjusts within a range from 0 to 7.
 - **Filter (S-video and composite video input):**
Either knob adjusts within a range from 0 to 7.
4. Repeat steps 2 and 3 for each image adjustment to be made for that input.

Front panel security lockout (executive mode)

The front panel security lockout limits the operation of the Integration Seamless Switcher from the front panel. When the switcher's front panel is locked, all of the front panel functions are disabled except for input selection, black/mute, cut, and dissolve.

To toggle the front panel lock on and off, press and hold the Color/Tint and Center buttons for approximately two seconds (figure 3-18). The LCD displays **Executive Mode Enabled** or **Executive Mode Disabled** to indicate the mode. Release the buttons. The LCD also displays **Executive Mode Enabled** if you push a locked out button when the switcher's front panel is locked.

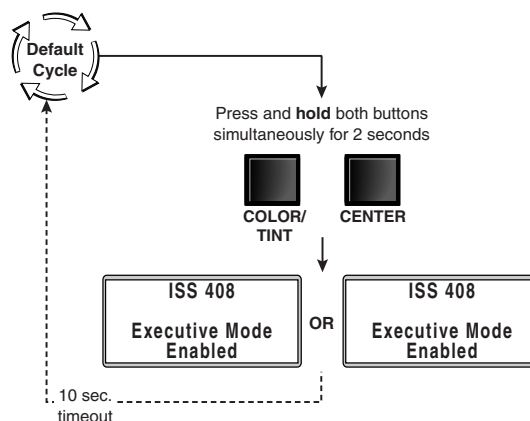


Figure 3-18 — Front panel security lockout flowchart

IP information

To set up the ISS for operation via its Ethernet port, you need to know and be able to change the IP address. One way to do this is via the IP address and hardware address screen.

To access the IP address and hardware address screen, press and **hold** the Color/Tint and Detail buttons while you apply power to the ISS (figure 3-19). When the ISS is finished initializing, it displays both addresses.

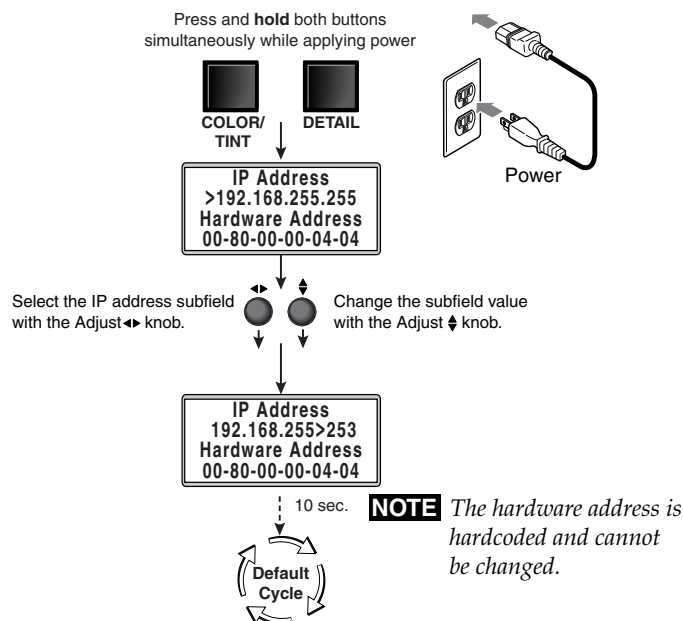


Figure 3-19 — IP information flowchart

If you need to change the IP address, use the Adjust ◀▶ knob to select the desired subfield. Rotate the Adjust ◀ knob to change the value. Repeat the adjustment for other subfields as required.

Valid IP addresses consist of four 1-, 2-, or 3-digit numeric subfields separated by dots (periods). Each field can be numbered from 000 through 255. Leading zeroes, up to 3 digits total per field, are optional. Values of 256 and above are invalid.

NOTE If the local system administrators have not changed the value, the factory-specified default, 192.168.254.254, is the correct value for this field.

NOTE The hardware address is hardcoded and cannot be changed.

Optimizing the Video

Perform the following steps, in sequence, after you have installed the ISS. This procedure will help you to configure the switcher for the best settings for your display environment. In a multi-screen environment, perform this procedure for each display.

See *Advanced Configuration menu* earlier in this chapter to select and output a test pattern and to select and output blue only video.

See *Picture adjustments*, earlier in this chapter, to make adjustments to the picture quality.

See *User Presets menu*, earlier in this chapter to save presets.

-
1. **If you are using a digital display**, such as an LCD or DLP projector, use the alternating pixels test pattern as a reference to adjust the phase and dot clock on the display devices. Proceed to step 3.
 2. **If you are using a CRT display**, use the cross hatch test pattern as a reference to converge the display.
 3. Set the ISS to output either the crop test pattern for 4:3 video or the appropriate aspect ratio test pattern. Use the display's positioning controls to position the image so that you can see all sides of the test pattern on the display.

NOTE *For the best results of this optimizing procedure, do not use the ISS's center controls to position the image.*

4. Select an input. Use the ISS's size and center functions to fill the crop or aspect ratio test pattern.

NOTE *If the input source is a DVD, set the DVD player to output a 16:9 aspect ratio before sizing the image using the ISS's size function to correct the aspect ratio. See Setting up a DVD source below.*

NOTE *When sizing and centering a letterbox movie video source, increasing the brightness on the ISS makes it easier to see the top and bottom of the active video.*

5. If the input source is RGB, use the horizontal and vertical detail adjustments to increase the sharpness.
6. **For S-video and composite video inputs**, set the ISS to output blue-only video and to output the Color Bars test pattern. Using the blue Color Bars as a reference, use the ISS's color and tint controls to adjust the video's color and tint.
7. **For RGB video inputs**, set brightness and contrast levels. See *Picture adjustments*, earlier in this chapter.
8. Save this setting into one of the user memories using the User Presets menu.

Setting up a DVD source

To get the best results when using a DVD as a video source, Extron recommends that the DVD player itself be set up to output an aspect ratio of 16:9 and not 4:3. Because all DVDs are mastered as 16:9, having them set up for anything else causes the player to internally scale and compress the signal. The DVD player's scaling and compression defeats the advantage of having 3-2 pulldown detection in the ISS.

All sizing adjustments to correct aspect ratio should be done using the ISS.

To change the output aspect ratio of most DVD players:

1. Enter the DVD player's setup or action menu while the disc is stopped.
2. Select the 16:9 aspect ratio.

Optimizing the Audio

Each individual input audio level can be adjusted within a range of -24 dB to +9 dB, so there are no noticeable volume differences between sources and for the best headroom and signal-to-noise ratio. Adjust the audio gain and attenuation as follows:

1. Connect audio sources to all desired inputs and connect the audio outputs to output devices such as audio players. See *Input connections* and *Standard output connections*, in chapter 2, *Installation*. For best results, wire all of the inputs and the outputs unbalanced.
2. Power on the audio sources, the switcher, and the audio players.
3. Switch among the inputs (see *Selecting an input and switching it to the program output*, in this chapter), listening to the audio with a critical ear or measuring the output audio level with test equipment, such as a VU meter.
4. As necessary, adjust the audio level of each input (see *Video & Audio Configuration menu*, in this chapter) so that the approximate output level is the same for all selected inputs.

Troubleshooting

The following tips may help you in troubleshooting.

- Some symptoms may resemble others, so you may want to look through all of the examples before attempting to solve the problem.
- Be prepared to backtrack in case the action taken does not solve the problem.
- It may help to keep notes and sketches in case the troubleshooting process gets lengthy. This will also give you something to discuss if you call for technical support.
- Try simplifying the system by eliminating components that may have introduced the problem or made it more complicated.
- **For sync-related problems:** Portable digital projectors are designed to operate close to the video source. Sync problems may result from using long cables or from improper termination. A sync adapter, such as Extron's ASTA (active sync termination adapter), may help solve these problems.
- **For LCD and DLP projectors and plasma displays:** In addition to the sync-related information above, check the user's manual that came with the projector for troubleshooting tips, as well as for settings and adjustments. Each manufacturer may have its own terms, so look for terms like "auto setup", "auto sync", "pixel phase", and "tracking".

General checks

1. Ensure that all devices are plugged in and powered on. The switcher is receiving power if the LCD is displaying the default display cycle.
2. Ensure an active input is selected on the switcher.
3. Ensure that the proper signal format is supplied.
4. Check the cabling and make corrections as necessary.
5. Call the Extron S³ Sales & Technical Support Hotline if necessary.

Specific problems

The table below shows some common operating problems and their solutions.

Problem	Cause	Solution
No image appears.	The input signal is incompatible.	Connect an input device that is compatible with the ISS.
	The input is improperly configured.	Use the Video & Audio Configuration submenu to select the correct input format.
	Freeze mode was entered via an SIS command when the image was black.	Deactivate freeze mode via an SIS command.
	The scaled output rate is too high for the display.	Change the scaled output to a compatible resolution.
The image is flashing.	The scaled output rate is too high for the display.	Change the scaled output to a compatible resolution.
The image is too soft.	The detail level needs to be changed.	Use the Filter button to change the detail level.

Operation, cont'd



Integration Seamless Switcher

4

Chapter Four

Programmer's Guide

RS-232 Link

Ethernet Link

Symbols

Switcher-Initiated Messages

Host-to-Switcher Instructions

Switcher Error Responses

Using the Command/Response Table

Programmer's Guide

RS-232 Link

The switcher's rear panel Remote 9-pin D female connector (figure 4-1) can be connected to the RS-232 serial port output of a host device such as a computer running the HyperTerminal utility or a control system. This connection makes software control of the switcher possible.

Pin	RS-232	Function
1	—	Not used
2	TX	Transmit data
3	RX	Receive data
4	—	Not used
5	Gnd	Signal ground
6	—	Not used
7	—	Not used
8	—	Not used
9	—	Not used





Figure 4-1 — Remote connector pin arrangement

The protocol is 9600 baud, 8-bit, 1 stop bit, no parity, and no flow control.

Ethernet Link

The rear panel Ethernet connector on the switcher can be connected to the an Ethernet LAN or WAN. This connection makes SIS control of the switcher possible using a computer connected to the same LAN or WAN.

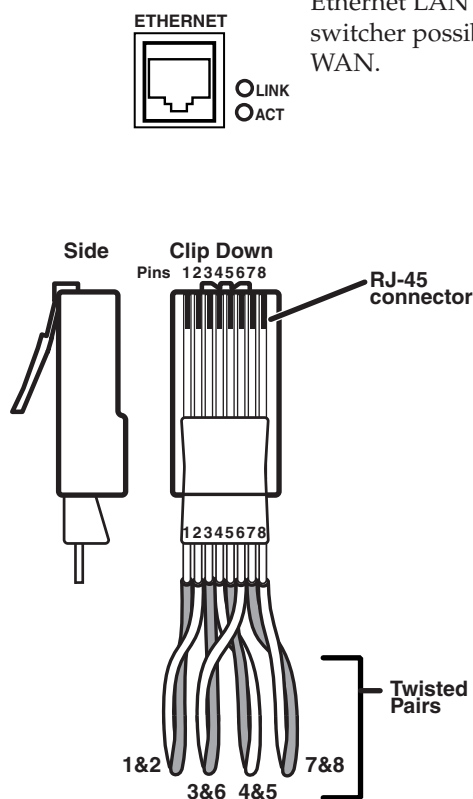

Patch (straight) cable

Side 1		Side 2	
Pin	Wire color	Pin	Wire color
1	White-orange	1	White-orange
2	Orange	2	Orange
3	White-green	3	White-green
4	Blue	4	Blue
5	White-blue	5	White-blue
6	Green	6	Green
7	White-brown	7	White-brown
8	Brown	8	Brown

Crossover cable

Side 1		Side 2	
Pin	Wire color	Pin	Wire color
1	White-orange	1	White-green
2	Orange	2	Green
3	White-green	3	White-orange
4	Blue	4	Blue
5	White-blue	5	White-blue
6	Green	6	Orange
7	White-brown	7	White-brown
8	Brown	8	Brown

Figure 4-2 — RJ-45 connector pinout table

Ethernet connection

The cable can be terminated as either a patch cable or a crossover cable (figure 4-2) and must be properly terminated for your application:

- **Patch (straight) cable** — Connection of the ISS to an Ethernet hub, router, or switcher that also hosts a controlling computer.
- **Crossover cable** — Direct connection between the ISS and a computer.

Default address

To access the switcher via the Ethernet port, you will need the switcher's IP address. If the address has been changed to an address comprised of words and characters, the actual numeric IP address can be determined using the front panel (see *IP information* in chapter 3, *Operation*) or the Ping utility (see *Ping to determine the switcher's IP address* or *Ping to determine the Web IP address* in appendix A, *Ethernet Connection*, for more details). If the address has not been changed, the factory-specified default is 192.168.254.254.

Symbols

Symbols (\boxed{Xn} values), defined below, are used throughout the discussions of the switcher-initiated messages that begin on the next page and the command/response table that begins on page 4-9. The symbols represent variables in the switcher-initiated messages and the command/response table fields.

- ↵ = CR/LF (carriage return/line feed) (hex 0D 0A)
← = CR (no line feed)
• = Space
Esc = Escape key
X1 = Input number 1 through 8
X2 = Output number 1 (program) or 2 (preview)
X3 = 0 = off, 1 = on
X4 = Take level: 0 = video and audio, 1 = video, 2 = audio
X5 = Video type:
0 = RGB 5 = Betacam 60
1 = RGBcvS 6 = HDTV
2 = YUVi 7 = S-video
3 = YUVp 8 = Composite
4 = Betacam 50

- X6 = Switcher resolution:
00 = 640x480 08 = 1360x765
01 = 800x600 09 = 1365x1024
02 = 832x624 10 = 720p*
03 = 848x480 11 = 1080p
04 = 852x480 12 = 1080i
05 = 1024x768* 13 = 1400 x 1050
06 = 1280x768* 14 = 576p
07 = 1280x1024*

NOTE Native DVI resolution.

- X7 = Video refresh rate:
0 = 50 Hz 3 = 75 Hz
1 = 56 Hz 4 = 85 Hz
2 = 60 Hz 5 = AFL*

NOTE Lock or AFL is Accu-RATE Frame Lock™ (PAL = 50 Hz, NTSC = 59.94 Hz).

- X8 = Output video type: 0 = RGBHV, 1 = RGBS

- X9 = Output sync polarity:
0 = H-/V- 2 = H+/V-
1 = H-/V+ 3 = H+/V+

- X10 = Color value (0 thru 127)
X11 = Tint value (0 thru 255)
X12 = Brightness and contrast value (0 thru 63)
X13 = Size value (range depends on the resolution)
X14 = Centering value (range depends on the resolution)
X15 = Blanking value (000 thru 200)
X16 = Pixel sampling phase (000 thru 031)
X17 = Horizontal filter value (0 thru 3)
X18 = Vertical filter or composite/S-video detail filter (1 thru 7)
X19 = Preset number (01 thru 03)
X20 = RGB delay/dissolve speed (00 [RGB] or 01 [dissolve] to 50)
X21 = Program/preview output selection

Prog/Prev	Prog/Prev
0 = Off/Off	2 = Off/On
1 = On/Off	3 = On/On

- X22 = Test pattern type (1 through 10)
01 = Color Bars 06 = alternating pixels
02 = crosshatch 07 = film aspect ratio 1.78
03 = 4x4 crosshatch 08 = film aspect ratio 1.85
04 = gray scale 09 = film aspect ratio 2.35
05 = crop 10 = ramp

- X23 = Gain/attenuation -24 dB to +9 dB, each step = 1 dB
X24 = Gain value Numeric dB value, 0 to +9
X25 = Attenuation value Numeric dB value, -1 to -24
X26 = Preview switch mode: 0 = stay mode, 1 = swap mode
X27 = Frequency: *mm.nn* (kHz [horizontal] or Hz [vertical])
X28 = Detected input signal standard (0 through 4)
0 = none 3 = NTSC 4.43
1 = NTSC 3.58 4 = SECAM
2 = PAL

NOTE Dash (-) = not applicable (occurs when the input is set for RGB or progressive YUV).

- X29 = "Take" effect: 00 = cut, 01 = dissolve

Switcher-Initiated Messages

When a local event such as power-up or a front panel operation occurs, the switcher responds by sending a message to the host. The switcher-initiated messages are listed in the following pages. The messages are underlined.

The switcher does not expect a response from the host, but the host program may request a new status.

Power-up

(c) Copyright 2002, Extron Electronics, ISS 408 Vx.xx ↵

The copyright message is initiated by the switcher when it is first powered on. Vx.xx is the firmware version number.

Input selection

Out[x2]•In[x1]•All ↵

A front panel video and audio switching, cut, or dissolve operation has occurred. [x2] is the output number and [x1] is the input number.

Out[x2]•In[x1]•RGB ↵

A front panel video-only switching, cut, or dissolve operation has occurred. [x2] is the output number and [x1] is the input number.

Out[x2]•In[x1]•Aud ↵

A front panel audio-only switching, cut, or dissolve operation has occurred. [x2] is the output number and [x1] is the input number.

Busy (cut and dissolve)

Bsy[x3] ↵

A cut or dissolve operation has been initiated or completed and the switcher is reporting its busy status ([x3]). After the switcher has reported that it is busy (Bsy1 ↵), it ignores all SIS commands until it completes the operation and reports that it is no longer busy (Bsy0 ↵).

Cutting or dissolving in stay mode

The switcher issues the following reports when you switch the input that is applied to the preview output to the program output in stay mode:

NOTE *The sequence of commands **may** vary, but you should see all of the listed commands.*

Tke[x4] ↵

(SIS operation response only) The switcher has received the SIS "Take" (%) command.

Bsy1 ↵

The switcher is busy and will not respond to any SIS commands.

Out1•In[x1]•All (or RGB or Aud) ↵

The input to the program output has changed (to the input that **had been** switched to preview output).

Bsy0 ↵

The switcher is no longer busy and is able to respond to SIS commands.

Cutting or dissolving in swap mode

The switcher issues the following reports when you swap the preview and program outputs in stay mode:

Tke^{x4} ↵

(SIS operation response only) The switcher has received the SIS “Take” (%) command.

Bsy1 ↵

The switcher is busy and will not respond to any SIS commands.

Out1•In^{x1}•All (or RGB or Aud) ↵

The input to the program output has changed (to the input that **had been** switched to preview output).

Out2•In^{x1}•All (or RGB or Aud) ↵

The input to the preview output has changed (to the input that **had been** switched to program output).

Bsy0 ↵

The switcher is no longer busy and is able to respond to SIS commands.

Input and output video type

In^{x1}Typ^{x5} ↵

A front panel input video type selection has occurred. ^{x1} is the input number and ^{x5} is the input video type.

Rte^{x6}^{x7} ↵

A front panel output video format selection has occurred. ^{x6} is the output resolution and ^{x7} is the output refresh rate.

Syn^{x8} ↵

A front panel output video type selection has occurred. ^{x8} is the output video format (RGBHV or RGBS).

Pol^{x9} ↵

A front panel output video polarity selection has occurred. ^{x9} is the output sync polarity.

Picture adjustments

^{x2}Col^{x10} ↵

A front panel color adjustment has occurred. ^{x2} is the output number switched to the adjusted input and ^{x10} is the color variable.

^{x2}Tin^{x11} ↵

A front panel tint adjustment has occurred. ^{x2} is the output number switched to the adjusted input and ^{x11} is the tint variable.

^{x2}Br^t^{x12} ↵

A front panel color brightness adjustment has occurred. ^{x2} is the output number switched to the adjusted input and ^{x12} is the brightness variable.

^{x2}Con^{x12} ↵

A front panel contrast adjustment has occurred. ^{x2} is the output number switched to the adjusted input and ^{x12} is the contrast variable.

Programmer's Guide, cont'd

X2HszX13 ←

A front panel horizontal size adjustment has occurred. X2 is the output number and X13 is the size variable.

X2VszX13 ←

A front panel vertical size adjustment has occurred. X2 is the output number and X13 is the size variable.

X2HphX14 ←

A front panel horizontal centering adjustment has occurred. X2 is the output number and X14 is the centering variable.

X2VphX14 ←

A front panel vertical centering adjustment has occurred. X2 is the output number and X14 is the centering variable.

X2BltX15 ←

A front panel top line blanking adjustment has occurred. X2 is the output number and X15 is the blanking variable.

X2BlbX15 ←

A front panel bottom line blanking adjustment has occurred. X2 is the output number and X15 is the blanking variable.

X2PhsX16 ←

A front panel pixel phase adjustment has occurred. X2 is the output number and X16 is the pixel phase variable.

X2DhzX17 ←

A front panel horizontal detail filter adjustment has occurred for the **RGB or component video** input tied to output X2. X17 is the filter variable.

X2DvzX18 ←

A front panel vertical detail filter adjustment has occurred for the **RGB or component video** input tied to output X2. X18 is the filter variable.

X2DvzX18 ←

A front panel vertical detail filter adjustment has occurred for the **S-video or composite video** input tied to output X2. X18 is the filter variable.

BluX3 ←

The blue-only mode has been turned on for both outputs or off for both outputs from the front panel. X3 is the on/off status for the two outputs.

FilX3 ←

The edge enhancement mode has been turned on for both outputs or off for both outputs from the front panel. X3 is the on/off status for the two outputs.

RGB delay and dissolve speed

DlyX20 ←

A front panel RGB delay adjustment has occurred. RGB delay affects input selections for the preview output only. X20 is the delay value, in 0.01 second steps. X20 can be as much as 50 = 5.0 seconds.

Dur[x20]↵

A front panel dissolve speed adjustment has occurred. Dissolve speed affects the duration of the dissolve function when switching the preview output to the program output. [x20] is the delay value, in 0.01 second steps. [x20] can be as much as 50 = 5.0 seconds.

Test pattern

Tst[x21]*[x22]↵

A test pattern has been turned on or off for one or both outputs from the front panel. [x21] is the on/off status for either or both outputs and [x22] is the test pattern selected.

Audio gain and attenuation

[x1]Aud[x23]↵

A front panel audio input level adjustment has occurred. [x1] is input number and [x23] is the audio gain or attenuation level.

Output video and audio mute

[x?]Vmt[x3]↵

A front panel video mute operation has occurred. [x?] is the output and [x3] is the mute status: 0 =off (video not muted), 1 = on (video muted).

[x?]Amt[x3]↵

A front panel audio mute operation has occurred. [x?] is the output and [x3] is the mute status: 0 =off (audio not muted), 1 = on (audio muted).

Preview switch mode

Psm[x26]↵

A front panel audio input level adjustment has occurred. [x26] is the stay or swap status for preview switch mode. See *Preview Switch Mode submenu* in chapter 3, *Operation*, for a description of the two switch modes.

PAL film mode

[x1]Flm[x3]↵

The PAL film mode has been selected or deselected from the front panel for the selected input. [x1] is input number and [x3] is the on/off status for PAL film mode.

Programmer's Guide, cont'd

Automated adjustments

Img[x3]↵

The Auto Image feature has been turned on or off from the front panel for all input selections. [x3] is the on/off status.

Aut[x3]↵

The auto presets feature has been turned on or off from the front panel for all input selections. [x3] is the on/off status.

Enh[x3]↵

The enhanced mode feature has been turned on or off from the front panel for S-video or composite video tied to both outputs. [x3] is the on/off status for the two outputs.

[x2]Reconfig↵

The input selected for the [x2] output has been adjusted using the Auto Image feature or a user preset.

Host-to-Switcher Instructions

The switcher accepts SIS commands through its RS-232 port and/or its Ethernet port. SIS commands consist of one or more characters per command field. They do not require any special characters to begin or end the command character sequence. Each switcher response to an SIS command ends with a carriage return and a line feed (CR/LF = ↵), which signals the end of the response character string. A string is one or more characters.

Switcher Error Responses

When the switcher receives an SIS command and determines that it is valid, it performs the command and sends a response to the host device. If the switcher is unable to perform the command because the command is invalid or contains invalid parameters, the switcher returns an error response to the host. The error response codes are:

E01 — Invalid input channel number (too large)

E10 — Invalid command

E11 — Invalid preset number (too large)

E12 — Invalid output number (too large)

E13 — Invalid value (out of range)

Using the Command/ Response Table

The command/response table begins on the next page. Except for the gain and attenuation settings and the filter settings, upper or lower case letters are acceptable in the command field. The table at right shows the hexadecimal equivalent of each ASCII command.

ASCII to HEX Conversion Table										Esc 1B	CR 0D	LF 0A
Space 20	!	21	"	22	#	23	\$	24	%	25	&	26
(28)	29	*	2A	+	2B	,	2C	-	2D	.	2E
0 30	1	31	2	32	3	33	4	34	5	35	6	36
8 38	9	39	:	3A	;	3B	<	3C	=	3D	>	3E
@ 40	A	41	B	42	C	43	D	44	E	45	F	46
H 48	I	49	J	4A	K	4B	L	4C	M	4D	N	4E
P 50	Q	51	R	52	S	53	T	54	U	55	V	56
X 58	Y	59	Z	5A	[5B	\	5C]	5D	^	5E
` 60	a	61	b	62	c	63	d	64	e	65	f	66
h 68	i	69	j	6A	k	6B	l	6C	m	6D	n	6E
p 70	q	71	r	72	s	73	t	74	u	75	v	76
x 78	y	79	z	7A	{	7B		7C	}	7D	~	7E
											DEL	7F

NOTE

With the exception of the audio gain and attenuation (G and g) and horizontal and vertical filtering (D and d) commands, the SIS commands are not case sensitive.

Command/response table for SIS commands

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Input selection			
NOTE You can select an input for either output (preview or program) using SIS commands.			
Select video and audio Example:	$\boxed{x2}*\boxed{x1}!$ 1*2!	Out $\boxed{x2}$ •In $\boxed{x1}$ •All \leftarrow Out1•In2•All \leftarrow	Select input $\boxed{x1}$ to $\boxed{x2}$ output. Input 2 video and audio selected to program output.
Select video only Example:	$\boxed{x2}*\boxed{x1}\&$ 2*5&	Out $\boxed{x2}$ •In $\boxed{x1}$ •RGB \leftarrow Out2•In5•RGB \leftarrow	Select video input $\boxed{x1}$ to $\boxed{x2}$ output. Input 5 video only selected to preview output.
Select audio only	$\boxed{x2}*\boxed{x1}\$$	Out $\boxed{x2}$ •In $\boxed{x1}$ •Aud \leftarrow	Select audio input $\boxed{x1}$ to $\boxed{x2}$ output.
Take (switch preview output to program output)			
NOTE The cut or dissolve effect is determined by the Switching Effect, $\boxed{x29}$ (0 = cut, 1 = dissolve) *4# command. See Command/Response Table for Special Function SIS Commands. The preview switch mode, <i>stay</i> or <i>swap</i> , determines the preview output after the take command. <ul style="list-style-type: none"> • In <i>stay</i> mode, the preview output remains unchanged (both outputs share the same input). • In <i>swap</i> mode, the program output switches to the preview output (the two outputs swap inputs). 			
Switch video and audio	%	Tke0 \leftarrow	Switch preview video and audio output to the program output.
Switch video only	1%	Tke1 \leftarrow	Switch preview video output to the program output.
Switch audio only	2%	Tke2 \leftarrow	Switch preview audio output to the program output.
NOTE The response (Tke0 \leftarrow , Tke1 \leftarrow , or Tke2 \leftarrow) indicates that the switcher has received and is responding to the "Take" command. A larger series of switcher-initiated messages follows the Tke response during a cut or dissolve operation. The following two examples show the sequence of responses to a "Take" command in stay and swap mode. See Busy (cut and dissolve) earlier in this chapter for more details about the responses after the Tke response.			
Example (<i>stay</i> mode):	%	Tke0 \leftarrow Bsy1 \leftarrow Out1•In $\boxed{x1}$ •All \leftarrow Bsy0 \leftarrow	Take command. Busy. Switch input to program scaler. Clear busy.
Example (<i>swap</i> mode):	1%	Tke1 \leftarrow Bsy1 \leftarrow Out1•In $\boxed{x1}$ •All \leftarrow Out2•In $\boxed{x1}$ •All \leftarrow Bsy0 \leftarrow	Take command. Busy. Switch input to program scaler. Switch input to preview scaler. Clear busy.
Video mute			
Video mute on	$\boxed{x2}*1B$	$\boxed{x2}$ Vmt $\boxed{x3}$ \leftarrow	Set the $\boxed{x2}$ video output to black.
Video mute off	$\boxed{x2}*0B$	$\boxed{x2}$ Vmt $\boxed{x3}$ \leftarrow	Set the $\boxed{x2}$ video output to the selected input 1 through 8.
View video mute status	$\boxed{x2}B$	$\boxed{x3}$ \leftarrow	Video mute is $\boxed{x3}$ for $\boxed{x2}$ output.
Input video type			
Set video type Example:	$\boxed{x1}*\boxed{x5}\backslash$ 4*3\	$\boxed{x1}$ Typ $\boxed{x5}$ \leftarrow 4Typ3 \leftarrow	Specify input $\boxed{x1}$ video type. Specify input 4 type as YUVp.
View video type	$\boxed{x1}\backslash$	$\boxed{x5}$ \leftarrow	Input $\boxed{x1}$ video type is $\boxed{x5}$.

Programmer's Guide, cont'd

Command/response table for SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Scaler output video type			
Set output resolution and rate <i>Example:</i>	$\boxed{x6}*\boxed{x7}=$ 5*4=	Rte $\boxed{x6}*\boxed{x7}$ ↵ Rte05*4 ↵	Command character is "equals". Set output to 1024x768 at 85Hz.
View resolution and rate	=	Rte $\boxed{x6}*\boxed{x7}$ ↵	
Color			
NOTE <i>Color adjustments are available only for interlaced component video (YUVi), S-video, and composite video inputs.</i> <i>The $\boxed{x2}$ value specified is the output to which the adjusted input is switched.</i>			
Set a specific color value	$\boxed{x2}*\boxed{x10}C$	$\boxed{x2}Col\boxed{x10}$ ↵	Specify the color adjustment.
Increment color value	$\boxed{x2}+C$	$\boxed{x2}Col\boxed{x10}$ ↵	Increase the color setting by one.
Decrement color value	$\boxed{x2}-C$	$\boxed{x2}Col\boxed{x10}$ ↵	Decrease the color setting by one.
View the color value	$\boxed{x2}C$	$\boxed{x10}$ ↵	Show the color setting.
Tint			
NOTE <i>Tint adjustments are available only for S-video and composite video inputs.</i> <i>The $\boxed{x2}$ value specified is the output to which the adjusted input is switched.</i>			
Set a specific tint value	$\boxed{x2}*\boxed{x11}T$	$\boxed{x2}Tin\boxed{x11}$ ↵	Specify the tint adjustment.
Increment tint value	$\boxed{x2}+T$	$\boxed{x2}Tin\boxed{x11}$ ↵	Increase the tint setting by one.
Decrement tint value	$\boxed{x2}-T$	$\boxed{x2}Tin\boxed{x11}$ ↵	Decrease the tint setting by one.
View the tint value	$\boxed{x2}T$	$\boxed{x11}$ ↵	Show the tint setting.
Brightness			
NOTE <i>The $\boxed{x2}$ value specified is the output to which the adjusted input is switched.</i>			
Set a specific brightness value	$\boxed{x2}*\boxed{x12}Y$	$\boxed{x2}Brt\boxed{x12}$ ↵	Specify the brightness adjustment.
Increment brightness value	$\boxed{x2}+Y$	$\boxed{x2}Brt\boxed{x12}$ ↵	Increase the brightness.
Decrement brightness value	$\boxed{x2}-Y$	$\boxed{x2}Brt\boxed{x12}$ ↵	Decrease the brightness.
View the brightness value	$\boxed{x2}Y$	$\boxed{x12}$ ↵	Show the brightness setting.
Contrast			
NOTE <i>The $\boxed{x2}$ value specified is the output to which the adjusted input is switched.</i>			
Set a specific contrast value	$\boxed{x2}*\boxed{x12}\wedge$	$\boxed{x2}Con\boxed{x12}$ ↵	Specify the contrast adjustment.
Increment contrast value	$\boxed{x2}+\wedge$	$\boxed{x2}Con\boxed{x12}$ ↵	Increase the contrast.
Decrement contrast value	$\boxed{x2}-\wedge$	$\boxed{x2}Con\boxed{x12}$ ↵	Decrease the contrast.
View the contrast value	$\boxed{x2}\wedge$	$\boxed{x12}$ ↵	Show the contrast setting.
Horizontal size			
Set a specific horizontal size	$\boxed{x2}*\boxed{x13}:$	$\boxed{x2}Hsz\boxed{x13}$ ↵	Specify the horizontal size.
Increase the horizontal size	$\boxed{x2}+:$	$\boxed{x2}Hsz\boxed{x13}$ ↵	Widen the picture.
Decrease the horizontal size	$\boxed{x2}-:$	$\boxed{x2}Hsz\boxed{x13}$ ↵	Make the picture narrower.
View the horizontal size	$\boxed{x2}:$	$\boxed{x13}$ ↵	Show the horizontal size.
Vertical size			
Set a specific vertical size	$\boxed{x2}*\boxed{x13};$	$\boxed{x2}Vsz\boxed{x13}$ ↵	Specify the vertical size.
Increase the vertical size	$\boxed{x2}+;$	$\boxed{x2}Vsz\boxed{x13}$ ↵	Make the picture taller.
Decrease the vertical size	$\boxed{x2}-;$	$\boxed{x2}Vsz\boxed{x13}$ ↵	Make the picture shorter.
View the vertical size	$\boxed{x2};$	$\boxed{x13}$ ↵	Show the vertical size.

Command/response table for SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Horizontal shift			
Set a specific horizontal position	$\boxed{X2}*\boxed{X14}H$	$\boxed{X2}Hph\boxed{X14}\leftarrow$	Specify the horizontal position.
Increment right	$\boxed{X2}+H$	$\boxed{X2}Hph\boxed{X14}\leftarrow$	Shift the picture right.
Decrement left	$\boxed{X2}-H$	$\boxed{X2}Hph\boxed{X14}\leftarrow$	Shift the picture left.
View the horizontal position	$\boxed{X2}H$	$\boxed{X14}\leftarrow$	Show the horizontal position.
Vertical shift			
Set a specific vertical position	$\boxed{X2}*\boxed{X14}/$	$\boxed{X2}Vph\boxed{X14}\leftarrow$	Specify the vertical position.
Increment up	$\boxed{X2}+ /$	$\boxed{X2}Vph\boxed{X14}\leftarrow$	Shift the picture up.
Increment down	$\boxed{X2}- /$	$\boxed{X2}Vph\boxed{X14}\leftarrow$	Shift the picture down.
View the vertical position	$\boxed{X2} /$	$\boxed{X14}\leftarrow$	Show the vertical position.
Top blanking			
Set a top blanking value <i>Example:</i>	$\boxed{X2}*\boxed{X15}(1*2($	$\boxed{X2}Blt\boxed{X15}\leftarrow1Blt2\leftarrow$	Blank the top two lines of output 1.
Increment top blanking value	$\boxed{X2}+($	$\boxed{X2}Blt\boxed{X15}\leftarrow$	Increase blanking value 1 line.
Decrement top blanking value	$\boxed{X2}-($	$\boxed{X2}Blt\boxed{X15}\leftarrow$	Decrease blanking value 1 line.
View the top blanking value	$\boxed{X2}(<$	$\boxed{X2}Blt\boxed{X15}\leftarrow$	
Bottom blanking			
Set a bottom blanking value <i>Example:</i>	$\boxed{X2}*\boxed{X15})2*5)$	$\boxed{X2}Blb\boxed{X15}\leftarrow2Blb5\leftarrow$	Blank the bottom five lines of output 2.
Increment bottom blanking value	$\boxed{X2}+)$	$\boxed{X2}Blb\boxed{X15}\leftarrow$	Increase blanking value 1 line.
Decrement bottom blanking value	$\boxed{X2}-)$	$\boxed{X2}Blb\boxed{X15}\leftarrow$	Decrease blanking value 1 line.
View the bottom blanking value	$\boxed{X2})$	$\boxed{X2}Blb\boxed{X15}\leftarrow$	
Pixel phase			
Set a specific pixel sampling phase	$\boxed{X2}*\boxed{X16}U$	$\boxed{X2}Phs\boxed{X16}\leftarrow$	Specify the pixel sampling phase.
Increment sampling value	$\boxed{X2}+U$	$\boxed{X2}Phs\boxed{X16}\leftarrow$	Increase the phase value.
Decrement sampling value	$\boxed{X2}-U$	$\boxed{X2}Phs\boxed{X16}\leftarrow$	Decrease the phase value.
View the sampling value	$\boxed{X2}U$	$\boxed{X16}\leftarrow$	Show the pixel sampling phase.
Horizontal detail filter (RGB and component video inputs)			
<p>NOTE The <i>horizontal detail filter</i> is available only for RGB and component video inputs. The same command with a different \boxed{Xn} variable is available to set a combined detail filter for S-video and composite video inputs.</p> <p>The $\boxed{X2}$ value specified is the output to which the filtered input is switched.</p> <p>The command (D) is case sensitive.</p>			
Set a specific filter value	$\boxed{X2}*\boxed{X17}D$	$\boxed{X2}Dhz\boxed{X17}\leftarrow$	Set the horizontal detail level.
Increment filter value	$\boxed{X2}+D$	$\boxed{X2}Dhz\boxed{X17}\leftarrow$	Increase the horizontal detail level.
Decrement filter value	$\boxed{X2}-D$	$\boxed{X2}Dhz\boxed{X17}\leftarrow$	Decrease the horizontal detail level.
View the horizontal filter value	$\boxed{X2}D$	$\boxed{X17}\leftarrow$	Show the horizontal detail level.

Programmer's Guide, cont'd

Command/response table for SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Vertical detail filter (RGB and component video inputs)			
NOTE The vertical detail filter is available only for RGB and component video inputs. The $\boxed{x2}$ value specified is the output to which the filtered input is switched. The command (d) is case sensitive.			
Set a specific filter value	$\boxed{x2}*\boxed{x18}d$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Set the vertical detail level.
Increment filter value	$\boxed{x2}+d$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Increase the vertical detail level.
Decrement filter value	$\boxed{x2}-d$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Decrease the vertical detail level.
View the vertical filter value	$\boxed{x2}d$	$\boxed{x18}\leftarrow$	Show the vertical detail level.
Detail filter (S-video and composite video inputs)			
NOTE Composite and S-video inputs support a single detail filter only, rather than separate horizontal and vertical filters. To apply a detail filter to the scaled output when the input is composite video or S-video, use the same command as the horizontal filter (D) with the $\boxed{x18}$ variable. The $\boxed{x2}$ value specified is the output to which the filtered input is switched.			
Set a specific filter value	$\boxed{x2}*\boxed{x18}D$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Set the detail filter level.
Increment filter value	$\boxed{x2}+D$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Increase the detail filter level.
Decrement filter value	$\boxed{x2}-D$	$\boxed{x2}Dvz\boxed{x18}\leftarrow$	Decrease the detail filter level.
View the vertical filter value	$\boxed{x2}D$	$\boxed{x18}\leftarrow$	Show the detail filter level.
Auto Memories			
Auto memories on	1M	Aut $\boxed{x3}\leftarrow$	Set the ISS to apply auto memories settings to all inputs as selected.
Auto memories off	0M	Aut $\boxed{x3}\leftarrow$	Set the ISS to not apply auto memories settings.
View auto memories status	M	$\boxed{x3}\leftarrow$	Auto memories is $\boxed{x3}$ (on or off) for all inputs.
User presets			
NOTE The $\boxed{x2}$ value specified is the output to which the input with the associated user preset is switched.			
Save user preset	$\boxed{x2}*\boxed{x19},$	Spr $\boxed{x2}*\boxed{x19}\leftarrow$	Command code is comma. Save the $\boxed{x2}$ outputs settings as preset $\boxed{x19}$.
Recall user preset	$\boxed{x2}*\boxed{x19}.$	Rpr $\boxed{x2}*\boxed{x19}\leftarrow$	Command code is period. Recall preset $\boxed{x19}$ settings for $\boxed{x2}$ output.
Freeze			
Enable	$\boxed{x2}*1F$	$\boxed{x2}Frz1\leftarrow$	Output a "frozen" video image.
Disable	$\boxed{x2}*0F$	$\boxed{x2}Frz0\leftarrow$	Turn off freeze (output motion video).
View the freeze status	$\boxed{x2}F$	$\boxed{x3}\leftarrow$	Show the freeze status.
Example:	$\boxed{x2}F$	0 \leftarrow	Freeze mode off.
Test pattern			
Select test pattern for an output	$\boxed{x21}*\boxed{x22}J$	Tst $\boxed{x21}*\boxed{x22}\leftarrow$	Select a test pattern for the $\boxed{x21}$ output(s).
View test pattern	J	$\boxed{x21}*\boxed{x22}\leftarrow$	Show the test pattern.
Example:	j	3*002 \leftarrow	Crosshatch test pattern selected for both outputs.

Command/response table for SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Set audio gain and attenuation			
Set gain Example:	[X1]*[X24]G 4*3G	[X1]Aud[X23]↵ 4Aud+•3↵	Set gain for input [X1] to [X24] dB. Set gain for input 4 to 3 dB.
NOTE The command (G) is case sensitive.			
Set attenuation	[X1]*[X25]g	[X1]Aud[X23]↵	Set attenuation for input [X1] to [X23] dB.
NOTE The command (g) is case sensitive.			
Increment level	[X1]+G	[X1]Aud[X15]↵	Increase input [X1] audio level by +1 dB.
Decrement level	[X1]-G	[X1]Aud[X15]↵	Decrease input [X1] audio level by -1 dB.
View audio level Example:	[X1]g 4G	[X15]↵ -•3↵	View gain for input [X1]. The ISS reports that the input 4 audio level is at -3 dB of attenuation.
Audio mute			
Audio mute on	[X2]*1Z	Amt[X3]↵	Mute the [X2] audio output.
Audio mute off	[X2]*0Z	Amt[X3]↵	Unmute the [X2] audio output.
View audio mute status	[X2]Z	[X3]↵	Audio mute is [X3] for [X2] output.
Executive mode			
Disable	0X	Exe0↵	Adjustments & selections can be made from the front panel.
Enable (lock image adjustments)	1X	Exe1↵	Lock front panel adjustments; adjust image via RS-232 only.
View the executive mode status Example:	X X	[X3]↵ 0↵	Show executive mode status. Executive mode is off.
Verbose mode			
NOTE The default for verbose mode is <i>on</i> for the RS-232 connection and <i>off</i> for Ethernet connections.			
Disable (block reports)	[Esc]0CV↵	Vrb0↵	Turn off verbose mode. The ISS does not send the reports listed in <i>switcher-initiated messages</i> earlier in this chapter.
NOTE Disable verbose mode blocks reports for <i>front panel operations only to this connection (RS-232 or Ethernet) only</i> . The ISS continues to send responses to SIS commands to all ports. The ISS continues to send reports for front panel operations to other connections.			
Enable (allow reports)	[Esc]1CV↵	Vrb1↵	Turn on verbose mode. The ISS sends all reports.
View the verbose mode status Example:	[Esc]CV↵ [Esc]CV↵	[X3]↵ 1↵	Show verbose mode status. Verbose mode is on (the ISS issues reports).

Programmer's Guide, cont'd

Command/response table for SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Information requests			
Query firmware version number	Q	x.xx ↵	Show the controller firmware version.
Request part number	N	zz-zzz-zz ↵	Show the ISS's part #.
Request general information	[X2]I	(See below) Vid [X1]•Aud [X1]•Frz [X3]•Hrt [X27]•Vrt [X27]•Std [X28] ↵	Show the ISS's status. where: Hrt = horizontal rate (kHz) and Vrt = vertical rate (Hz).
NOTE xxx:xx means the signal is out of range. NOTE The response to the View File Directory command differs, depending on whether the command is sent via an RS-232 or Telnet connection or sent via a Web browser connection.			
View file directory (RS-232)	[Esc]DF ↵	filename date/time length ↵ filename date/time length ↵ filename date/time length ↵ filename date/time length ↵ nnnn Bytes Left ↵ ↵	
View file directory (Web)	[Esc]DF ↵	Switcher response File [1] = 'filename1, date1, filesize1'; File [2] = 'filename2, date2, filesize2'; File [3] = 'filename3, date3, filesize3'; File [4] = 'filename4, date4, filesize4'; File [n] = 'filenamen, daten, filesizen';	
Resets			
Zap all audio adjustments	[Esc]zA ↵	ZapA ↵	Reset all audio levels to 0 dB.
Zap all ISS settings	[Esc]zXXX ↵	Zapx ↵	Reset all settings: All inputs: RGB Output: RGBHV 1024x768 @ 60Hz RGB delay: 1.0 sec. Audio level: 0 dB Filtering: Horz. = 3, Vert. = 7 Blanking: 0, top and bottom Pixel phase: 16 Dissolve speed (duration) 1.0 sec. Auto Image: Off Auto Memory recall: On
Absolute reset	[Esc]ZQQQ ↵	Zpq ↵	Similar to Zap all ISS settings , plus clears IP address to 192.168.254.254 and deletes user and administrator passwords.

Command/response table for IP SIS commands

X30	= ISS name	(Up to 240 characters)
X31	= GMT Time and date (set)	MM/DD/YY-HH:MM:SS, where MM = month: 01 (January) through 12 (December) DD = day: 01 through 31 YY = year: 00 through 99 HH = hour: 00 through 24 MM = minutes: 00 through 59 SS = seconds: 00 through 59
X32	= Time and date (read)	In the format: Day,•DD•MMM•YYYY•HH:MM:SS GMT, where Day = weekday: Mon through Sun DD = day: 01 through 31 MM = month: Jan through Dec YYYY = year: 2000 through 2099 HH = hour: 00 through 24 MM = minutes: 00 through 59 SS = seconds: 00 through 59
X33	= IP address	###.###.###.###
X34	= Password	12 digits, alphanumeric
X35	= Hardware address	##-##-##-##-##-##
X36	= Number of open connections	0 - 255

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Set ISS name (location)	Esc X30 CN ←	Ipn • X30 ↵	
Read ISS name (location)	Esc CN ←	X30 ↵	
Set GMT/date	Esc X31 CT ←	Ipt • X32 ↵	
NOTE The date and time entered should be Greenwich Mean Time (GMT).			
Read GMT/date	Esc CT ←	X32 ↵	
Set IP address	Esc X33 CI ←	Ipi • X33 ↵	The switcher sends the response, but the host may not receive it.
Read IP address	Esc CI ←	X33 ↵	
Read hardware address	Esc CH ←	X35 ↵	
Read # of open connections	Esc CC ←	X36 ↵	
Set administrator password	Esc • X34 CA ←	Ipa • X34 ↵	
Read administrator password	Esc CA ←	X34 ↵	
Set user password	Esc • X34 CU ←	Ipu • X34 ↵	
Read user password	Esc CU ←	X34 ↵	
NOTE When the computer is connected to the switcher via the RS-232 link, the Admin and User password fields are not masked. If a password has been inadvertently changed to an unknown value, you can look up and, if desired, change a password in this window without knowing the current password.			

Programmer's Guide, cont'd

Command/response table for special function SIS commands

The syntax for setting a special function is $\boxed{Xn}*\boxed{X?}\#$ where \boxed{Xn} is the value or variable (such as 35 in the first example below), $\boxed{X?}$ is the function number (such as "set RGB delay" in the first example below), and # is the execute command. To view a function's setting, use $\boxed{X?}\#$ where $\boxed{X?}$ is the function number.

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
RGB delay and dissolve speed			
RGB delay (Triple-Action Switching)	$\boxed{X20}*3\#$	Dly $\boxed{X20}\leftarrow$	Switching delay of the selected input to the preview output. Adjustable in 0.01 second steps from 0 up to 50 = 5.0 seconds. 0 = 0.0 seconds (default), 1 = 0.1 seconds, 2 = 0.2 seconds, and so on.
<i>Example:</i>	35*3#	Dly35 \leftarrow	RGB delay set to 3.5 seconds.
Dissolve speed	$\boxed{X20}*5\#$	Dur $\boxed{X20}\leftarrow$	Adjustable in 0.1 second steps from 1 up to 50 = 5.0 seconds. 1 = 0.1 seconds (default), 1 = 0.1 seconds, 2 = 0.2 seconds, and so on.
Switch effect			
Switching effect	$\boxed{X29}*4\#$	Eff $\boxed{X29}\leftarrow$	Set the switch effect, 00 = cut or 01 = dissolve, used by the Take, %, command.
Scaler output settings			
Output sync format	$\boxed{X8}*6\#$	Syn $\boxed{X8}\leftarrow$	00 = RGBHV (default). 01 = RGBS. RGBHV output signal.
<i>Example:</i>	1*6#	Syn1 \leftarrow	
Output polarity	$\boxed{X9}*7\#$	Pol $\boxed{X9}\leftarrow$	$\boxed{X9}$: Horizontal/Vertical polarity 0 = H-/V- 2 = H+/V- 1 = H-/V+ 3 = H+/V+ H-/V+ output polarity.
<i>Example:</i>	1*7#	Pol1 \leftarrow	
Blue screen			
Blue screen (blue & sync output only)	$\boxed{X3}*8\#$	Blu $\boxed{X3}\leftarrow$	0 = off (normal output). 1 = on (blue video & sync output). Blue & sync output for setup.
<i>Example:</i>	1*8#	Blu1 \leftarrow	
Edge smoothing			
Edge smoothing	$\boxed{X3}*16\#$	Fil $\boxed{X3}\leftarrow$	00 = off. 01 = on (default). Enable edge smoothing.
<i>Example:</i>	1*16#	Fil01 \leftarrow	
Enhanced mode			
Enhanced mode	$\boxed{X3}*12\#$	Enh $\boxed{X3}\leftarrow$	0 = off. 1 = on. Enable enhanced mode.
<i>Example:</i>	1*12#	Enh01 \leftarrow	

Command/response table for special function SIS commands (cont'd)

Command	ASCII Command (host to switcher)	Response (switcher to host)	Additional description
Auto Image			
Set Auto Image	[X3]*13#	Img [X3] ↵	00 = off. 01 = on.
<i>Example:</i>	1*13#	Img01 ↵	Set Auto Image on.
Execute Auto Image	[X18]*14#	Img [X18] ↵	[X18] : Auto Image input tied to output: Prog/Prev Prog/Prev 01 = Yes/No 03 = Yes/Yes 02 = No/Yes
		[X2]Reconfig ↵	Output [X2] Auto Image complete.
		[X2]Reconfig ↵	Output [X2] Auto Image complete.
NOTE If Auto Image adjustments are not necessary for an input, the [X2]Reconfig ↵ message may not be received.			
NOTE If both outputs are receiving the same input, both outputs are auto imaged regardless of the [X18] received.			
PAL film mode			
Set PAL film mode	[X1]*[X3]*18#	[X1]Flm[X3] ↵	[X3] : 0 = off. 1 = on.
<i>Example:</i>	8*1*18#	8Flm01 ↵	The ISS uses its 2:2 pulldown (PAL) video processing algorithms to scale input 8.
Read PAL film mode	[X1]*18#	[X3] ↵	0 = off. 1 = on.
Preview switch mode			
Set preview switch mode	[X26]*20#	Psm [X26] ↵	[X26] : 0 = stay mode. 1 = swap mode.
<i>Example:</i>	1*20#	Psm01 ↵	The ISS swaps the preview and program outputs when you perform a cut or dissolve operation.
Read preview switch mode	20#	[X26] ↵	0 = stay mode. 1 = swap mode.

Programmer's Guide, cont'd

Command/response table for advanced instruction set commands

The advanced instruction set consists of four hexadecimal commands for uploading and downloading all or a portion of the switcher's memory. These commands are for use by knowledgeable programmers, and result in a dump of data from (upload) or to (download) the switcher. Programmers can use the commands to exactly duplicate the settings among switchers with a minimum of effort.

Command	Hex Command (host to switcher)	Response (switcher to host)	Additional description
Memory backup			
Read all memory contents	90 91	{8226 data bytes+1 byte checksum}	Upload (switcher to control device) all color, tint, contrast, brightness, detail, sizing, and centering settings; all user presets; and all auto memories for all inputs and both outputs.
Write all memory contents	90 92+8226 data bytes+1 byte checksum	Dn1 ↵	Download (control device to switcher) all color, tint, contrast, brightness, detail, sizing, and centering settings; all user presets; and all auto memories for all inputs and both outputs.
Read partial contents	[X2]90 93	{26 data bytes+1 byte checksum}	Upload (switcher to control device) color, tint, contrast, brightness, detail, sizing, and centering settings; all user presets; and all auto memories for the input selected for output [X2].
Write partial contents	[X2]90 94+26 data bytes+1 byte checksum	Dn1 ↵	Download (control device to switcher) color, tint, contrast, brightness, detail, sizing, and centering settings; all user presets; and all auto memories for the input selected for output [X2].



Integration Seamless Switcher

Chapter Five

Switcher Software

Control Software for Windows

Button-Label Generator

Switcher Software

Control Software for Windows

Two software programs accompany the ISS 108 and ISS 408:

- The Extron ISS/ISM Control Program (Extron part #29-054-01), which communicates with the switcher via the rear panel Remote port, provides an easy way for you to control the switcher.
- The Extron Button-Label Generator, which allows you to design and print a label strip for the switcher's front panel input selection button window.

Both programs are compatible with Windows 95/98, Windows NT, Windows Me., and Windows 2000. Updates to these programs can be downloaded from the Extron Web site (<http://www.extron.com>).

Installing the software

The programs are contained on a CD-ROM, and it is most convenient to load the program to the hard drive and run it from there.

To install the program from the CD-ROM to the hard drive, run SETUP.EXE from the CD-ROM and follow the instructions that appear on the screen. The program occupies approximately 1.5 Mb (megabytes) of hard-drive space.

By default the installation creates a C:\ISSISM folder, and it places three icons (ISS/ISM Control Pgm, ISS/ISM Help, and Button-Label Generator) into a group or folder named "Extron Electronics".

Software operation via Ethernet

When an ISS is connected to an Ethernet WAN or LAN, any number of users can operate it, locally or remotely, using the ISS/ISM Control program. See *Ethernet connection* in chapter 2, *Installation*, for Ethernet installation details

Connection to the switcher via the Ethernet is password protected. There are two levels of password protection: administrator and user. Administrators have full access to all ISS switching capabilities and editing functions. Users can select video and/or audio for output, select test patterns, set RGB and audio mutes, select a blue screen, and view all settings with the exception of passwords. If the same passwords or no password is required for logging on, all personnel log on with administrator privileges. Fields and functions that exceed user privileges are grayed out in the ISS/ISM Control program when the operator is logged on as a user.

Ethernet protocol settings

The IP settings/options screen (figure 5-6 on page 5-5) provides a location for observing and, if connected via the RS-232 link or if logged on via the Ethernet port as an administrator, editing settings unique to the Ethernet interface. None of the fields on this screen can be edited while logged on as a user. See *System Configuration Page* in chapter 6, *Ethernet Operation*, for details on the contents of these fields. See appendix A, *Ethernet Connection*, for other basic information about Internet protocol.

NOTE *Editing variables on the IP settings/options screen while connected via the Ethernet port can immediately disconnect the user from the ISS. Extron recommends editing the settings on this screen using the RS-232 link and protecting the Ethernet access to this screen by assigning an administrator's password to qualified and knowledgeable personnel only.*

Using the control program

Many items found in the ISS/ISM Control Program are also accessible via front panel controls and the LCD menus, see chapter 3, *Operation*, and under SIS control, see chapter 4, *Programmer's Guide*. The ISS/ISM Help Program provides information on settings and on how to use the control program itself.

1. To run the control program, double-click the ISS/ISM Control Pgm icon in the Extron Electronics group or folder. The Comm menu appears on the screen (figure 5-1).

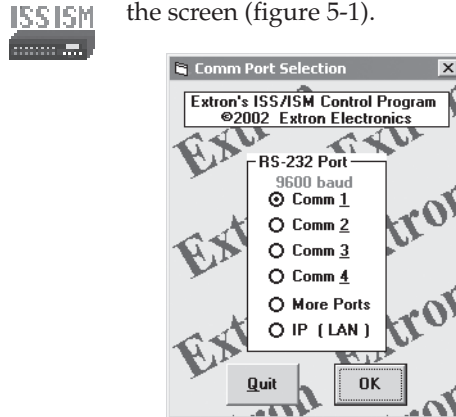


Figure 5-1 — Comm port selection window

2. Select the comm port that is connected to the ISS's Remote port or select *IP [LAN]* and click *OK*.
If you selected a comm port, proceed to step 5.
If you selected *IP [LAN]*, proceed to step 3.
3. **If you selected *IP [LAN]* in step 2**, the IP connection window appears (figure 5-2). The window displays the last IP address that this computer was logged on to via the ISS/ISM Control program. If no one has logged on to the ISS from this computer, enter the switcher's ISS IP address. If the address has not been changed, the factory-specified default is 192.168.254.254.

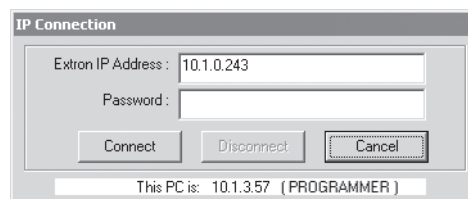


Figure 5-2 — Address and password entry

4. **If you selected *IP [LAN]* in step 2**, when prompted, enter the appropriate administrator or user password and click *Connect*.

If you logged on using the administrator password, the Windows program connects you to the ISS with all of the administrator rights and privileges.

If you logged on using the user password, the Windows program connects you to the ISS with only user capabilities.

If an incorrect password was entered, the program beeps and returns to the password entry display.

Switcher Software, cont'd

5. The Extron ISS/ISM Control Program window (figure 5-3) appears.

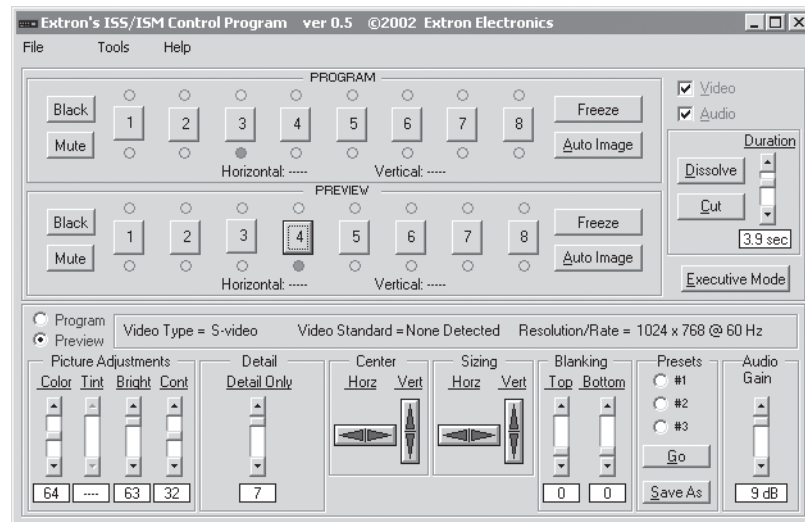


Figure 5-3 — Windows Control program window

6. If desired, on the task bar, click *Tools > I/O Configuration* to configure the video inputs and outputs in the I/O configuration window (figure 5-4).

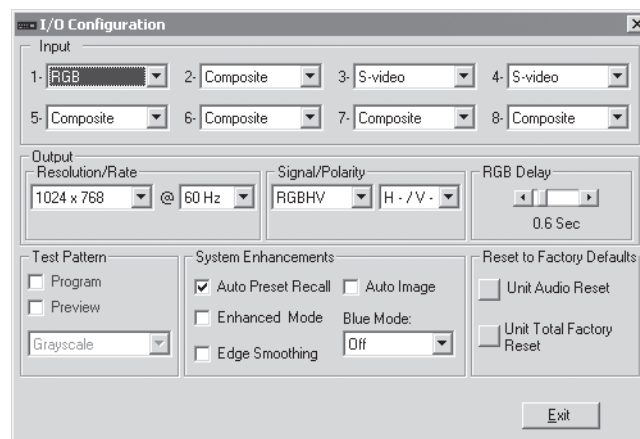


Figure 5-4 — Control program I/O Configuration window

7. If desired, on the task bar, click *Tools > Audio Settings* to set each input's audio level or attenuation in the Audio Settings window (figure 5-5).

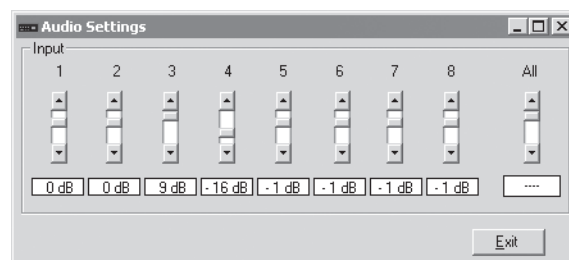


Figure 5-5 — Control program Audio Settings window

8. If desired, on the task bar, click *Tools > IP Options* to set the switcher's IP parameters in the IP Settings/Options window (figure 5-6).

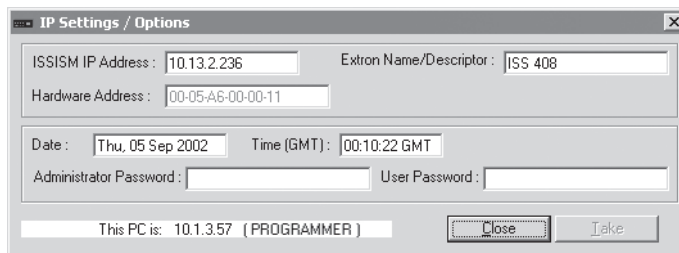


Figure 5-6 — Control program IP Setting/Options window

NOTE When the control program is connected to the switcher via the RS-232 link, the Administrator and User password fields are not masked. If a password has been inadvertently changed to an unknown value, you can look up and, if desired, change a password in this window without knowing the current password.

Using the help program

For information on program features, press the F1 computer key, or click the Help menu from within the ISS/ISM Control Program, or double-click the ISS/ISM Help icon in the Extron Electronics group or folder.



For explanations of buttons or functions, click the tabs in the help screen to reach the desired screen. Use a mouse or the Tab and Enter keys to select a button/function. A description and tips on using the program appear on the screen.

Button Label Generator

You may wish to customize the labeling of the ISS's front panel buttons. Blank templates for the ISS's button label windows are included in appendix A of this manual. However, you can easily create, customize, and print labels for the switcher's button label windows by using the Button-Label Generator software.



Button-Label
Generator

Installing the software

The program is included on the same CD-ROM as the ISS/ISM control program and is installed automatically when you install that program. It can also be downloaded from the Extron Web site (<http://www.extron.com>).

By default, the Windows installation goes in either the C:\ISSISM directory, if installed automatically with the ISS/ISM Control Program or the C:\BUTTONS directory if installed as a stand-alone program. The Button-Label Generator icon is placed in the "Extron Electronics" group or folder.

Using the software

1. To run the Button-Label Generator program, double-click the Button-Label Generator icon in the Extron Electronics group or folder, and click OK when prompted. The Extron's Button-Label Generator window appears (figure 5-7).
2. Under *System selection*, choose *Mtx50/MAV/XPoint*. This selection creates the correctly sized labels for the ISS's label strip. The button label editing area changes to reflect the number and arrangement of buttons on the device.

Switcher Software, cont'd

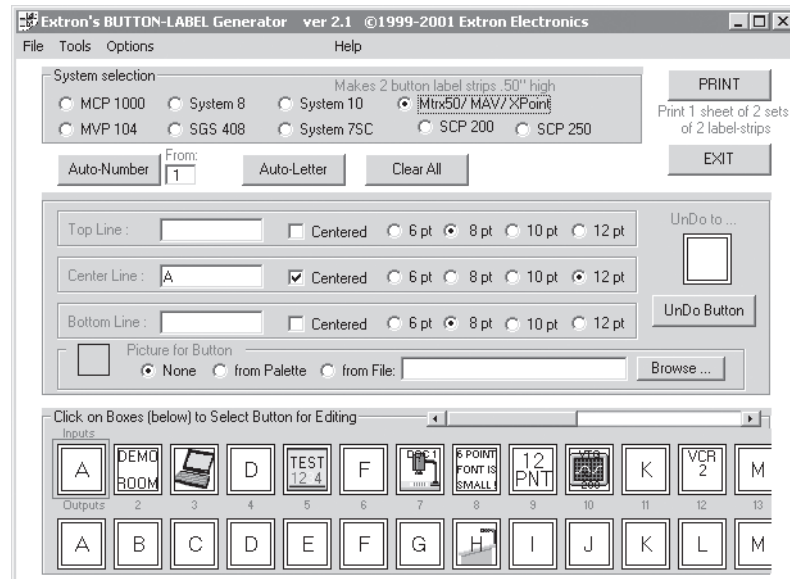


Figure 5-7 — Extron's Button-Label Generator window

3. Using normal Windows controls, you can create and print labels that can be cut out and placed in the label windows on the front panel of the ISS.

For information about using the program, you can access a help file by clicking on the Help menu on the main screen and choosing *Show Help*.

You can also see an example of a completed Extron Button-Label Generator window by clicking on the Help menu on the main screen, choosing *Show Help*, and clicking on the Load Demo button.



Integration Seamless Switcher

Chapter Six

Ethernet Operation

Load the Startup (Control) Page

Control Page

System Configuration Page

File Management Page

I/O Configuration Page

Ethernet Operation

The ISS 108 and ISS 408 can each be controlled and operated through its Ethernet port, connected via a LAN or WAN, using a Web browser such as Microsoft's Internet Explorer. The browser's display of the switcher's status or operation has the appearance of Web pages. This chapter describes the factory-installed HTML pages, which are always available and cannot be erased or overwritten.

NOTE *If your Ethernet connection to the ISS is unstable, try turning off the proxy server in your Web browser. In Microsoft's Internet Explore, click Tools > Internet Options > Connections > LAN Settings, uncheck the "Use a proxy server..." box, and then click Ok.*

Load the Startup (Control) Page

Access the switcher using HTML pages as follows:

1. Start the Web browser program.
2. Click in the browser's Address field.
3. Enter the switcher's IP address in the browser's Address field.

NOTE *If the local system administrators have not changed the value, the factory-specified default, 192.168.254.254, is the correct value for this field.*

4. If you want the browser to display a page other than the default page (such as a custom page that you have created and uploaded), enter a slash (/) and the file name to open.

NOTE *The browser's Address field should display the address in the following format: xxx.xxx.xxx.xxx/{optional_file_name.html}*

NOTE *The following characters are invalid in file names: {space} ~ @ = ' [] { } < > ' " ; : | \ and ?.*

5. Press the keyboard Enter key. The switcher checks to see if it is password protected.

If the switcher is not password protected, proceed to step 7.

If the switcher is password protected, the switcher downloads the Enter Network Password page (figure 6-1).

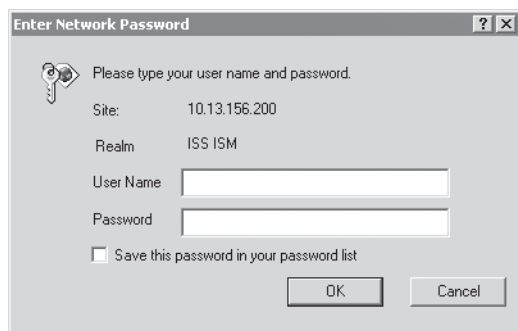


Figure 6-1 — Enter Network Password page

NOTE *A User Name entry is not required.*

6. Click the Password field and type in the appropriate administrator or user password. Click OK.

7. The switcher checks several possibilities, in the following order, and then responds accordingly:
 - a. Does the address include a specific file name, such as 10.13.156.10/file_name.html? **If so**, the switcher downloads that HTML page.
 - b. Is there a file in the switcher's memory that is named "index.html"? **If so**, the switcher loads "index.html" as the default startup page.
 - c. **If neither of the above conditions is true**, the switcher loads the factory-installed default startup page, "nortxe_index.html" (figure 6-2), also known as the Control page.

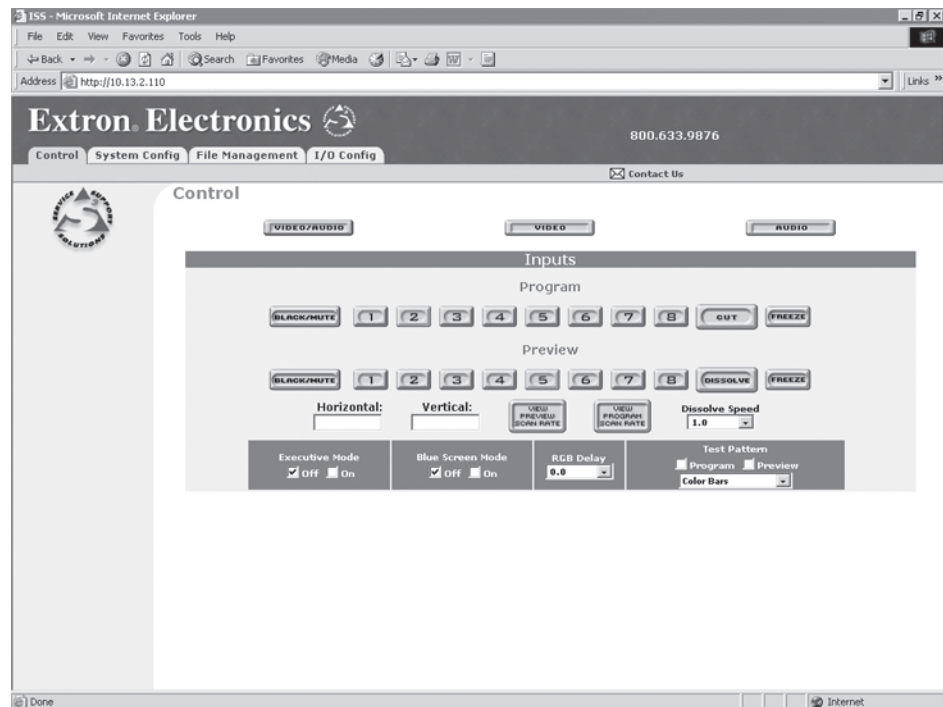


Figure 6-2 — Control page

Control Page

The Control page (figure 6-2) provides a means to control the switcher and includes links to three other pages: System Configuration, File Management, and I/O Configuration. On the Control page, you can select an input to the preview output and then cut or dissolve it to the program output or select an input to the program output directly. The Control page also provides facilities to check the frequency of an input and to mute and freeze the outputs. Access the Control page by clicking the *Control* tab.

Select and switch an input

Select and switch an input as follows:

1. Click the *Video/Audio*, *Video*, or *Audio* button to select both the video and audio planes, the video plane only, or the audio plane only for switching (audio follow or audio breakaway).
2. Select an input for the preview or program monitor by clicking the desired input button in either the Preview or Program row. After the RGB delay (**for the preview output only**), the selected input is displayed on the preview or program monitor. The selected input button turns blue to indicate a video and audio or video only selection and yellow to indicate an audio selection. The RGB delay is user-selectable, see *Change the RGB delay or dissolve speed*, below.
3. When you are ready to display the preview image on the program monitor, click either the *Cut* or *Dissolve* button.

If you click *Cut*, the preview image is immediately and seamlessly switched to the program output.

If you click *Dissolve*, the preview image is seamlessly switched to the program image and the switch is masked by a dissolve effect. The dissolve effect's duration is user-selectable, see *Change the RGB delay or dissolve speed*, below.

Change the RGB delay or dissolve speed

The RGB delay interval defines how long the screen is blanked when selecting a new input for the preview monitor. The dissolve speed specifies the length of the dissolve effect that can be used when switching the preview monitor image to the program monitor.

Change the RGB delay or dissolve speed as follows:

1. Click either the RGB Delay or Dissolve Speed field. A drop down scroll box appears (figure 6-3).

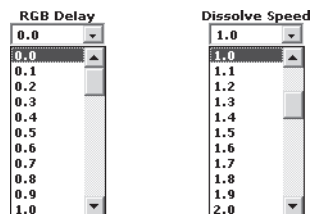


Figure 6-3 — RGB Delay and Dissolve Speed scroll boxes

2. Click and drag on either the slider or click the scroll up (▲) or scroll down (▼) buttons until the desired rate is visible.
3. Click the desired output.

Blackout the screen and mute the audio

You can mute the video (blackout the screen) and/or audio to the program or preview output from the Control page as follows:

1. Click the *Video/Audio*, *Video*, or *Audio* button to select both the video and audio planes, the video plane only, or the audio plane only for muting.
2. Click the Program or Preview *Black/Mute* button. The *Black/Mute* button turns blue to indicate a video and audio mute or video only mute or yellow to indicate audio mute. If you muted the program output, the front panel Black and/or Mute LEDs light.

Click the *Black/Mute* button again to unmute the video and/or audio.

Freeze the output

You can freeze the program or preview video output by clicking the Program or Preview *Freeze* button. The *Freeze* button turns blue. When the output is frozen, the input can be removed and the ISS functions as a video store.

Click the *Freeze* button again to toggle freeze mode off.

Output a test pattern

You can select a test pattern to output on the program and/or preview monitor. The test patterns are helpful when adjusting the connected displays for color, convergence, focus, resolution, contrast, grayscale, and aspect ratio.

Output a test pattern as follows:

1. Click the Ttest Pattern field. A drop down box appears (figure 6-4).




Figure 6-4 — Test pattern drop box

2. Click the desired test pattern.
3. Click the *Program* and/or *Preview* checkbox to turn on the test pattern.

Preview the scan rate

You can read the horizontal and vertical scan rate of the preview and program output by clicking the *Preview Scan Rate* or *Program Scan Rate* button. The horizontal and vertical frequency are displayed in the Horizontal and Vertical fields on the page.

Horizontal:
56.39

Vertical:
70.02



Blue screen

You can toggle Blue Only mode on and off by clicking the Blue Screen Mode *On* checkbox. Blue Only mode is helpful in the setup of the color and tint of the incoming video signal. In the Blue Only mode, only the sync and blue video signals are passed to the display.

Ethernet Operation, cont'd

Front panel security lockout (executive mode)

You can toggle the front panel security lockout on and off by clicking the Executive Mode *On* or *Off* checkbox. The security lockout limits the operation of the Integration Seamless Switcher from the front panel. When the switcher is locked, all of the front panel functions are disabled except for input selection.

System Configuration Page

The ISS downloads the System Configuration page (figure 6-5) when you click the *System Configuration* tab. The screen consists of fields in which you can observe and edit IP administration and system settings.

Figure 6-5 — System Configuration page

NOTE Access to the ISS settings using Web control is not password protected. Ensure only knowledgeable and qualified personnel have access to the switcher under Web control.

Administration fields

- Ethernet connection to the switcher, either by entering SIS commands (see chapter 4, *Programmer's Guide*) or using the Control Program (see chapter 5, *Switcher Software*) is password protected.
- Connection via HTML pages and connection via the RS-232 port are not password protected.

On password-protected connections, there are two levels of protection: administrator and user. Administrators have full access to all ISS switching capabilities and editing functions. Users can select video and/or audio for output, select test patterns, set RGB and audio mutes, select a blue screen, and view all settings with the exception of passwords.

The administration fields on the System Configuration page are for entering and verifying administrator and user passwords. Passwords are case sensitive and are limited to 12 upper case and lower case alphanumeric characters. Each password must be entered twice; once in the password field and then repeated in the re-enter password field. Characters in these fields are masked by asterisks (****). If you do not want to password protect an access level, leave the password field and the re-enter password field blank. After entering the desired password in both fields, click the *Submit* button.

NOTE *If a password has been inadvertently changed to an unknown value, you can still connect to the switcher via the RS-232 link, which is not password protected. When connected via the RS-232 link, using either SIS commands (see chapter 4, Programmer's Guide) or under Windows program control (see chapter 5, Switcher Software), you can look up and, if desired, change a password.*

ISS IP Settings fields

The ISS IP Settings fields provide a location for observing and editing settings unique to the Ethernet interface. After editing any of the settings on this page, click the *Submit* button.

ISS IP Address field

The ISS IP address field contains the IP address of the connected ISS. This value is encoded in the flash memory on the controller circuit board.

Valid IP addresses consist of four 1-, 2-, or 3-digit numeric subfields separated by dots (periods). Each field can be numbered from 000 through 255. Leading zeroes, up to 3 digits total per field, are optional. Values of 256 and above are invalid.

The default address is 192.168.254.254, but if this conflicts with other equipment at your installation, you can change the IP address to any valid value.

ISS Name field

The ISS name field contains the name of the switcher. This is helpful in identifying the switcher in multiple-unit networks. This name field can be changed to any valid name, up to 12 alphanumeric characters.

Hardware Address field

The Hardware Address field is hardcoded on the controller board and cannot be changed.

Ethernet Operation, cont'd

File Management Page

To delete files such as HTML pages from the ISS or to upload your own files to the ISS, click the File Management tab. The switcher downloads the file management HTML page (figure 6-6).

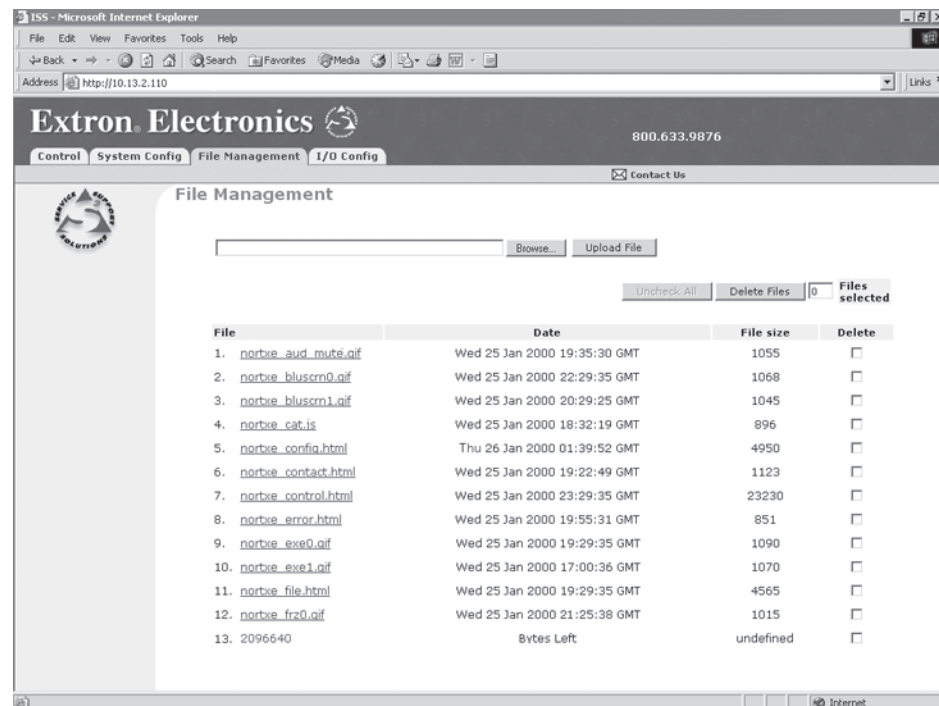


Figure 6-6 — File Management page

To delete a file, check the associated delete check box and click the *Delete Files* button.

Upload your own files as follows:

1. Click the *Browse* button.
2. Browse through your system and select the desired file(s).
3. Click the *Upload File* button.

I/O Configuration Page

You can set up the input configurations and the output format on the I/O Configuration page (figure 6-7). Access the I/O Configuration page by clicking the *I/O Configuration* tab.

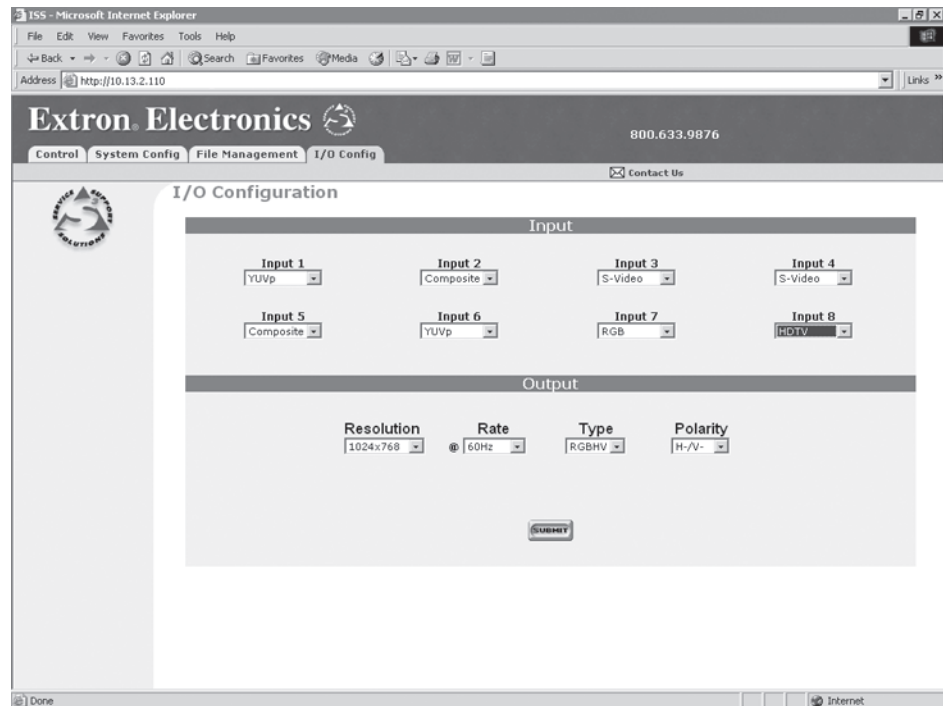


Figure 6-7 — Setup page

Input configuration

You can specify the format of each input. The available formats are RGB, RGBcS (identified as RGBcS in the drop box), YUVi, YUVp, Betacam 50, Betacam 60, HDTV, S-video, and composite video. Specify the input format as follows:

1. Click the desired input's configuration field. A drop down box appears (figure 6-8).



Figure 6-8 — Input configuration drop box

2. Click the desired input format.
3. Click the *Submit* button.

Ethernet Operation, cont'd

Output resolution, rate, sync format, and polarity

The ISS 408 scales the input up or down to any 1 of 40 output resolutions and rates. The ISS 108 scales the inputs to 1 of 20 resolutions and rates. Either switcher outputs the scaled video, as RGBHV or RGBS, with user-selectable polarity, via either the program or preview connectors. The table below shows the resolutions and rates available on the ISS 408 and ISS 108.

Resolution	50 Hz	56 Hz	60 Hz	75 Hz	85 Hz	Lock at 50/60 Hz†
640 x 480	108, 408		108, 408	108, 408		108, 408
800 x 600	108, 408		108, 408	108, 408		108, 408
832 x 624			108, 408	108, 408		108, 408
848 x 480			108, 408			108, 408
852 x 480			108, 408			108, 408
1024 x 768*	108, 408		108, 408	108, 408	108, 408	108, 408
1280 x 768*		408 only				408 only
1280 x 1024*	408 only		408 only			
1360 x 765			408 only			408 only
1365 x 1024			408 only			408 only
1400 x 1050	408 only		408 only			408 only
576p HDTV	408 only					408 only
720p* HDTV @ 60 Hz only			408 only			408 only
1080p HDTV @ 60 Hz only			408 only			408 only
1080i HDTV	408 only		408 only			408 only

* Native DVI output resolution.

† The output refresh rate is auto-selected, based on the video refresh rate of input 1.

NOTE

The optional DVI program output's horizontal resolution is limited to either 1024 or 1280 pixels. The vertical resolution is the selected vertical resolution.

For output rates with horizontal resolutions of 1024 or below, the ISS DVI output is 1024 x {selected vertical rate}. For example, if the output resolution is set to 640 x 480, then the DVI output resolution is 1024 x 480.

For output rates with horizontal resolutions of 1280 or above, the ISS DVI output is 1280 x {selected vertical rate}.

Resolutions marked with an asterisk (*) in the table above are native DVI outputs, meaning that the DVI output fully supports the selected horizontal and vertical resolution. The DVI output resolution exactly matches the analog resolution.

Output resolution

Select the output resolution as follows:

1. Click the Resolution field. A drop down scroll box appears (figure 6-9).

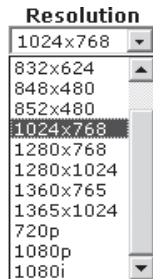


Figure 6-9 — Resolution scroll box

2. Click and drag on either the slider or click the scroll up (▲) or scroll down (▼) buttons until the desired rate is visible.
3. Click the desired output.
4. Click the *Submit* button.

Output rate

Select the output rate as follows:

1. Click the Rate field. A drop down box appears (figure 6-10).




Figure 6-10 — Rate drop box

2. Click the desired output frequency.

Frequencies that are not available for a specific resolution are marked N/A in the Rate drop box.

The drop box selection *Locked* enables the Extron Accu-RATE Frame Lock (AFL) feature. Accu-RATE Frame Lock eliminates image tearing and other artifacts of scaling motion video by eliminating frame rate conversion. It exactly matches the output rate of the ISS to the frame rate of the selected input. Select this feature if you will be using motion video sources with a display that is capable of a variety of refresh rates.

3. Click the *Submit* button.

Ethernet Operation, cont'd

Output format

Select between separate horizontal (H) and vertical (V) sync or composite (S) sync as follows:

1. Click the Type field. A drop down box appears (figure 6-11).




Figure 6-11 — Type drop box

2. Click the desired sync type.
3. Click the *Submit* button.

Output polarity

Select the output polarity as follows:

1. Click the Polarity field. A drop down box appears (figure 6-12).




Figure 6-12 — Polarity drop box

2. Click the desired polarity.
3. Click the *Submit* button.



Chapter Seven

Maintenance and Modifications

Opening and Closing the Switcher

Firmware Upgrade Installation

DVI Output Card Installation

Maintenance and Modifications

Opening and Closing the Switcher

To replace the firmware or install the optional DVI output card, you will need to open the ISS's case. Extron recommends that you send the unit in to Extron for service and updates.

Open and close the switcher as follows:

1. Disconnect the AC power cord from the ISS to remove power from the unit.

WARNING *To prevent electric shock, always unplug the ISS from the AC power source before opening the enclosure.*

2. If the ISS is installed in a rack, disconnect all signal and control cables and remove the ISS from the rack.
3. Remove the 16 screws, 8 on the top and 4 on each side of the ISS cover (figure 7-1).

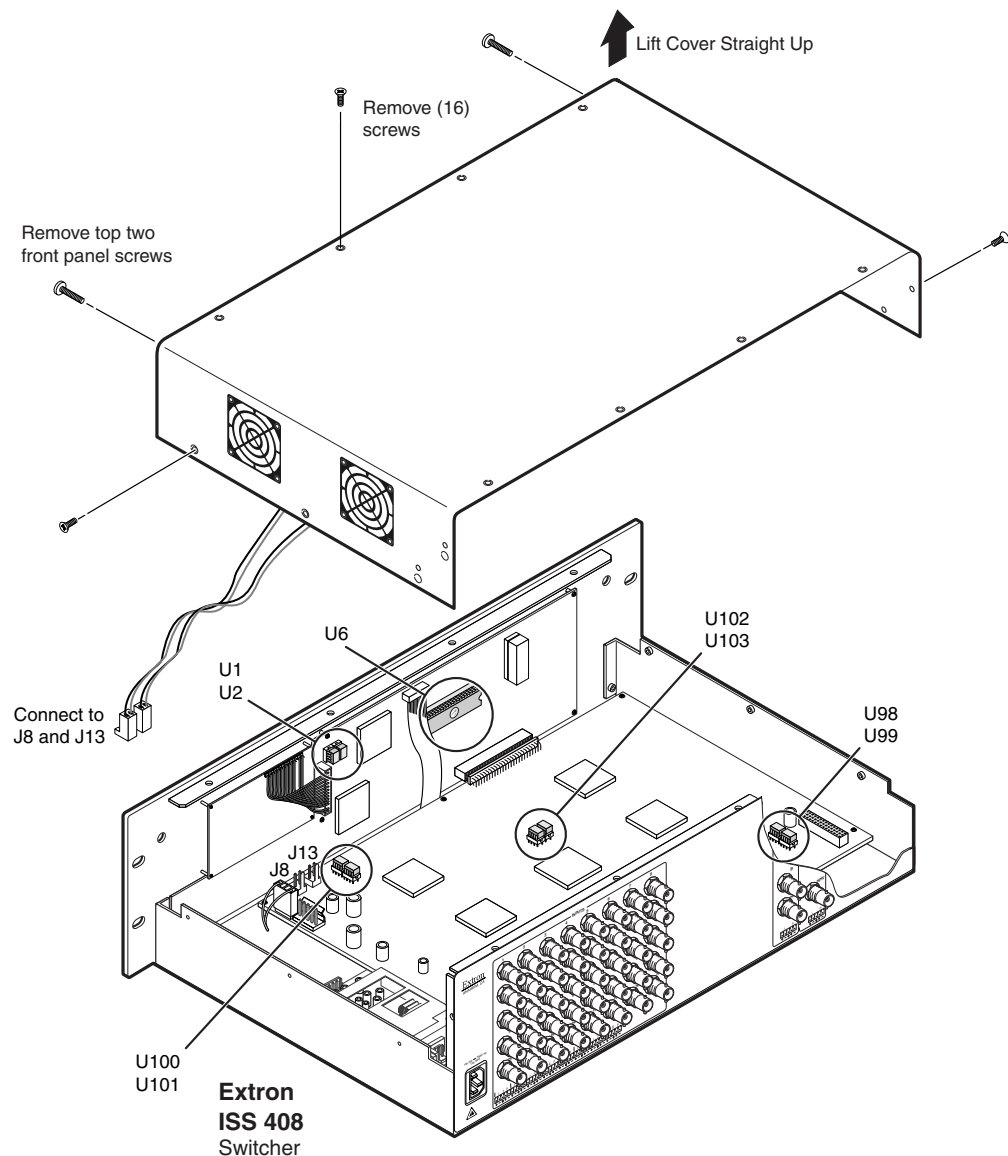


Figure 7-1 — Removing the ISS cover

4. Remove the top two front panel screws.
5. Lift the top cover straight up approximately five inches until you can access the fan power cords.

CAUTION *Do not touch any switches or other electronic components inside the ISS. Doing so could damage the switcher. Electrostatic discharge (ESD) can damage IC chips even though you cannot feel it. You must be electrically grounded before proceeding with firmware replacement. A grounding wrist strap is recommended.*

6. Disconnect the two fan power cords from connectors J8 and J13 on the main board.
7. Lift the top cover out of the way.
8. Perform the desired maintenance procedure. See *Firmware Upgrade Installation* or *DVI Output Card Installation* in this chapter.
9. Reconnect the two fan power cords to connectors J8 and J13 on the main board. It does not matter which fan is connected to which connector.
10. Replace the top cover on the ISS.
11. Fasten it with the screws that were removed in step 3 and step 4.
12. Rack mount the switcher if desired and reconnect all cables.

Firmware Upgrade Installation

In some cases the ISS's firmware may require replacement with an updated version. There are nine user-replaceable firmware chips, U1, U2, and U6 on the front panel circuit board and U98, U99, U100, U101, U102, and U103 on the main circuit board. The U-numbers are printed on the circuit boards. We recommend that you send the unit in to Extron for service and updates.


- Chip set U1 and U2 are replaced as a pair
- Chip U6 is replaced alone
- Chip set U98, U99, U100, and U101 are replaced as a set
- Chip set U102 and U103 are replaced as a pair

CAUTION *Changes to firmware must be performed by authorized service personnel only. Some ISS firmware updates must be performed at the Extron factory.*

Replace firmware in the ISS as follows:

WARNING *To prevent electric shock, always unplug the ISS from the AC power source before opening the enclosure.*

1. Open the switcher. See *Opening and Closing the Switcher* on page 7-2.
2. Locate the firmware chip(s) to be replaced on the main or front panel circuit board (figure 7-1).
3. After you are electrically grounded, use a DIP chip puller to grasp the IC chip(s) and pull it (or them) out of the socket.
4. Align the slots of the new firmware chip(s) with the angled corners of the socket in the same orientation as the old chip(s). Gently, but firmly, press the chip(s) into place in the socket.

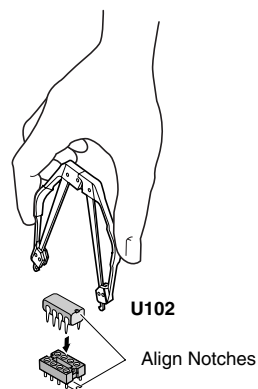

Maintenance and Modifications

5. Close the switcher. See *Opening and Closing the Switcher*, starting on step 9 on page 7-3.

DVI Output Card Installation

You can install an optional digital visual interface (DVI) output card in the ISS. With the card installed, the program output outputs DVI video on a standard DVI connector as well as the standard RGB video on BNC connector and 15-pin HD connectors. We recommend that you send the unit to Extron for service and updates.

Install an optional DVI output card in the ISS as follows:

WARNING *Changes to electronic components must be performed by authorized service personnel only.*

WARNING *To prevent electric shock, always unplug the ISS from the AC power source before opening the enclosure.*

1. Open the switcher. See *Opening and Closing the Switcher* on page 7-2.

CAUTION *Do not touch any switches or other electronic components inside the ISS. Doing so could damage the ISS. Electrostatic discharge (ESD) can damage IC chips even though you cannot feel it. You must be electrically grounded before proceeding with any electronic component replacement. A grounding wrist strap is recommended.*

2. Locate the DVI output card connector opening on the rear panel and the DVI output card connector J14. When viewed from the front, connector J14 is in the far left corner of the main circuit board (figure 7-2).

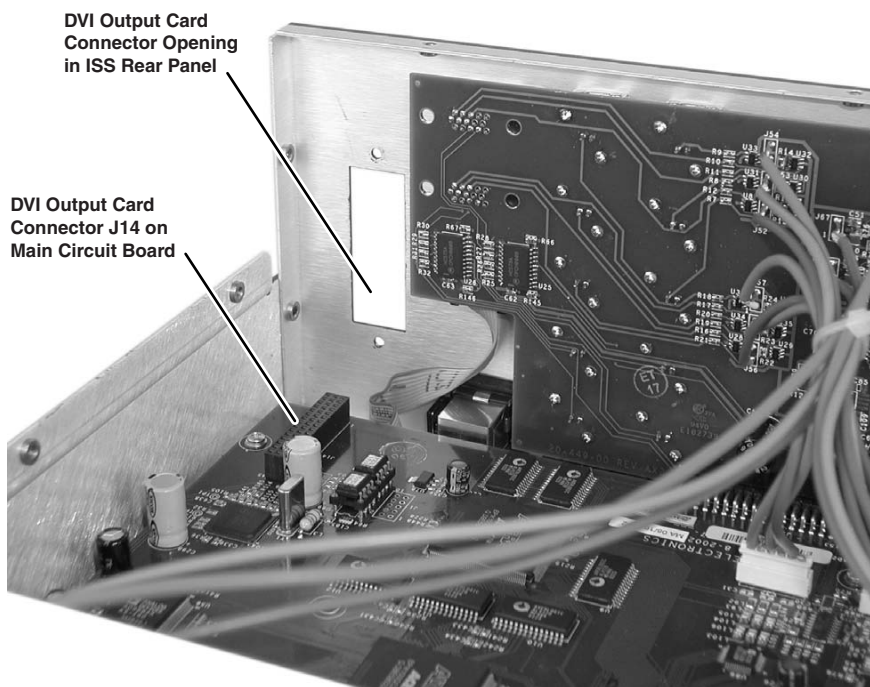


Figure 7-2 — DVI output card connector opening and socket J14

3. If the rear panel DVI connector opening is still covered, remove the two screws that secure the cover to the back panel and remove the cover.
4. Position the DVI card above connector J14 with the DVI connector facing toward the rear of the switcher. Ensure that the pins on the DVI card properly align with the J14 connector to prevent bending the pins.
5. Carefully mate the 45-pin connector on the DVI output board with connector J14 on the main circuit board (figure 7-3).

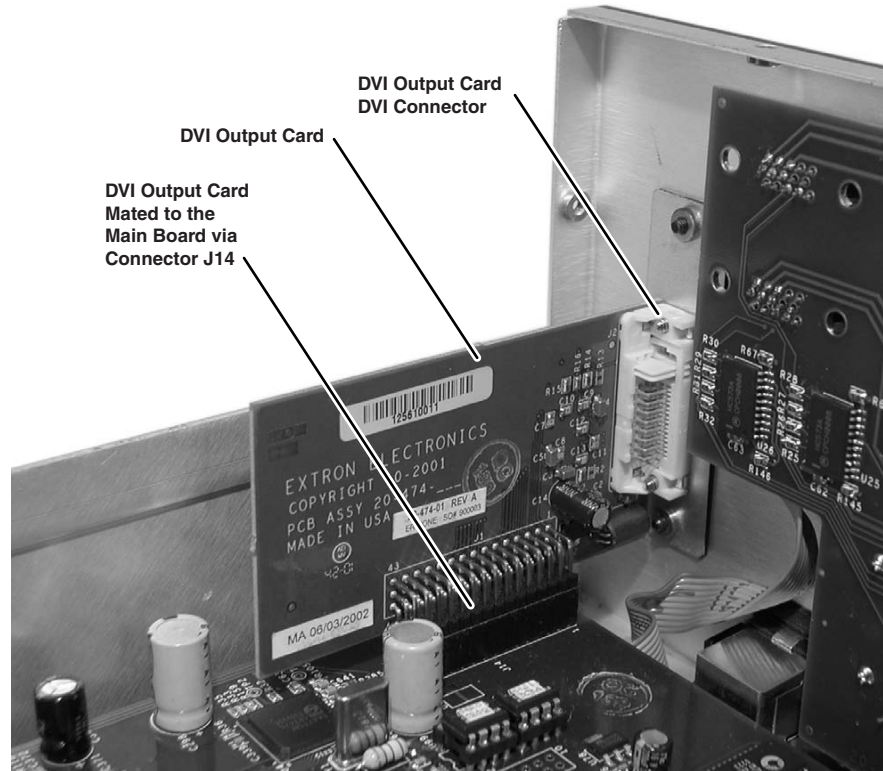


Figure 7-3 — Output DVI board installation

6. Secure the DVI card to the rear panel with the two screws removed in step 3.
7. Close the switcher. See *Opening and Closing the Switcher*, starting on step 9, on page 7-3.

Maintenance and Modifications



Integration Seamless Switcher

Appendix A

Ethernet Connection

Ethernet Link

Ethernet Connection

Ethernet Link

The rear panel Ethernet connector (figure A-1) on the ISS switcher can be connected to an Ethernet LAN or WAN. This connection makes SIS control of the switcher possible using a computer connected to the same LAN.

Ethernet connection

The Ethernet cables can be terminated as straight-through cables or crossover cables (figure A-1) and must be properly terminated for your application:

- **Patch (straight) cable** — Connection of the ISS to an Ethernet hub, router, or switcher that also hosts a controlling computer.
- **Crossover cable** — Direct connection between the ISS and a controlling computer.

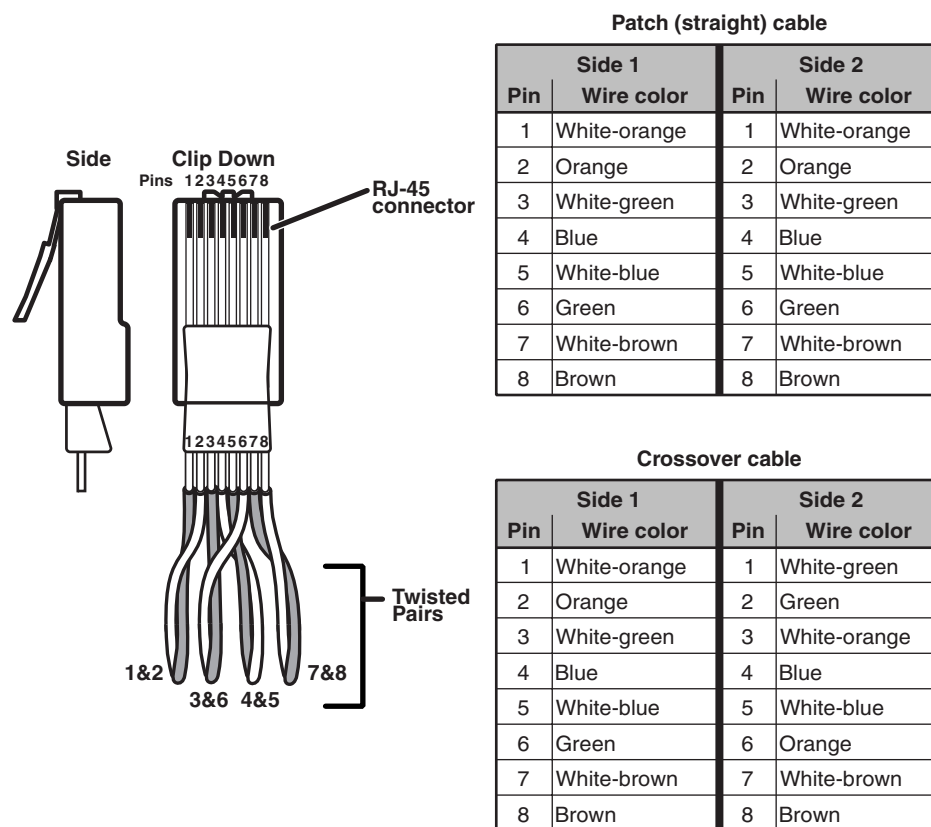


Figure A-1 — RJ-45 connector pinout table

Default address

To access the ISS switcher via the Ethernet port, you will need the Extron ISS IP address. If the address has been changed to an address comprised of words and characters, the actual numeric IP address can be determined using the Ping utility. If the address has not been changed, the factory-specified default is 192.168.254.254.

Ping can also be used to test the Ethernet link to the ISS.

Ping to determine the switcher's IP address

The Microsoft Ping utility is available at the DOS prompt. Ping tests the Ethernet interface between the computer and the ISS. Ping can also be used to determine the actual numeric IP address from an alias and to determine the Web address.

Access the DOS prompt and Ping the switcher as follows:

1. Click on *Start > Run*.
2. At the Open prompt, type *command*.
3. Click on the *OK* button.
4. At the DOS prompt, type *ping {IP address}* and press [Enter]. The computer returns a display similar to figure A-2.

The line **Pinging ...** reports the actual numeric IP address, regardless of whether you entered the actual numeric IP address or an alias name.

```
C:\>ping 192.168.254.254

Pinging 192.168.254.254 with 32 bytes of data:

Reply from 192.168.254.254: bytes=32 time<10ms TTL=128
Reply from 192.168.254.254: bytes=32 time<10ms TTL=128
Reply from 192.168.254.254: bytes=32 time<10ms TTL=128
Reply from 192.168.254.254: bytes=32 time<10ms TTL=128

Ping statistics for 192.168.254.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Figure A-2 — Ping response

Ping to determine Web IP address

The Ping utility has a modifier, *-a*, that directs the command to return the Web address rather than the numeric IP address.

At the DOS prompt, type *ping -a {IP address}* and then press [Enter]. The computer's return display is similar to the Ping response shown in figure A-2, except that when you specify the *-a* modifier, the line **Pinging mail...** reports the Web IP address rather than the numeric IP address, regardless of whether you entered the actual numeric IP address or an alias name.


Ethernet Connection, cont'd

Connect as a Telnet client

The Microsoft Telnet utility is available from the DOS prompt. Telnet allows you to input SIS commands to the ISS from the PC via the Ethernet link and the LAN.

Access the DOS prompt and start Telnet as follows:

1. Click on *Start > Run*.
2. At the Open prompt, type *command*.
3. Click on the *OK* button.
4. At the DOS prompt, type *telnet* and press [Enter]. The computer returns a display similar to figure A-3.

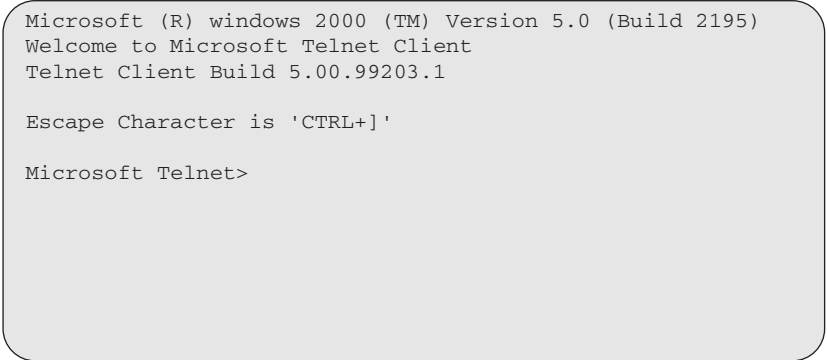

```
Microsoft (R) windows 2000 (TM) Version 5.0 (Build 2195)
Welcome to Microsoft Telnet Client
Telnet Client Build 5.00.99203.1

Escape Character is 'CTRL+]'

Microsoft Telnet>
```

Figure A-3 — Telnet screen

Telnet tips

It is not the intention of this manual to detail all of the operations and functionality of Telnet, however some basic level of understanding is necessary for operating the ISS via Telnet.

Open

Connect to the ISS using the Open command. Once you are connected to the switcher, you can enter the SIS commands the same as you would if you were using the RS-232 link.

Connect to the ISS as follows:

1. At the Telnet prompt, type *open {IP address}* and then press [Enter].
If the switcher is not password protected, no further prompts are displayed until you break or disconnect the connection to the ISS.
If the switcher is password protected, Telnet displays the password prompt.
2. If necessary, at the password prompt, type *{password}* and then press [Enter].

Connection to the switcher via the Ethernet can be password protected. There are two levels of password protection: administrator and user. A person logged on as an administrator has full access to all ISS switching capabilities and editing functions. Users can select video and/or audio for output, select test patterns, set RGB and audio mutes, select a blue screen, and view all settings with the exception of passwords. By default, the ISS ships with both passwords cleared (no password assigned).

Once you are logged in, the ISS returns either **Login Administrator** or **Login User**. No further prompts are displayed until you break or disconnect the connection to the ISS.

Escape character and Esc key

When Telnet is first started, the utility advises that the **Escape character** is 'Ctrl+J'. Many SIS commands include the keyboard **Esc** key. Consequently, some confusion may exist between the Escape character and the Escape key.

The Telnet Escape character is a key combination, the **Ctrl** key and the **J** key pressed simultaneously, that returns you to the Telnet prompt while leaving the connection to the ISS intact.

The Escape key is the **Esc** key on the computer keyboard.

Local echo

Once connected to the ISS, by default Telnet does not display your keystrokes on the screen. SIS commands are typed in blindly and the SIS responses are displayed on the screen. To command Telnet to show keystrokes, at the Telnet prompt, type *set local_echo* and then press [Enter] before you open the connection to the switcher.

With local echo turned on, keystrokes and the switcher's response are displayed on the same line. For example: **1*1!In1 Out1 All**, where **1*1!** is the SIS command and **In1 Out1 All** is the response.

With local echo turned on, all keystrokes are displayed, even those that should be masked, such as the password entry. For example, when entering a password with local echo turned on, you will see a display such as **a*d*m*i*n***, where **admin** is the keyed in password and ********* is the masked response.

Local echo can be turned off by typing *unset local_echo* and then pressing [Enter] at the Telnet prompt. If you are connected to the ISS and need to access the Telnet prompt to turn local echo off, type the Escape character (**Ctrl+J**).

Set carriage return-line feed

Unless commanded otherwise, Telnet transmits a line feed character only (no carriage return) to the connected ISS when you press the **Enter** key. This is the correct setting for SIS communication with the switcher. The Telnet *set crlf* command forces Telnet to transmit carriage return and line feed characters when **Enter** is pressed, but if *crlf* is set, the SIS link with the switcher will not function properly.

Close

To close the link to the switcher, access the Telnet prompt by typing the Escape character (**Ctrl+J**). At the Telnet prompt, type *close* and then press [Enter].

Help

For Telnet command definitions, at the Telnet prompt, type *?* and then press [Enter].

Quit

Exit the Telnet utility by typing *quit* and then press [Enter] at the Telnet prompt. If you are connected to the ISS, access the Telnet prompt beforehand by typing the Escape character (**Ctrl+J**).

Ethernet Connection, cont'd



Integration Seamless Switcher

Appendix B

Reference Information

Specifications

Part Numbers

Button Labels

Reference Information

Specifications

Video input

Number/signal type	8 RGBHV, RGBS, RGsB, RGBcvS, component video, S-video, composite video
Connectors	8 x 5 female BNC
Nominal level	1V p-p for Y of component video and S-video, and for composite video 0.7 V p-p for RGB 0.3V p-p for R-Y and B-Y of component video, and for C of S-video
Minimum/maximum levels	0 V to 1.0 V p-p with no offset
Impedance	75 ohms
Horizontal frequency	Autoscan 15 kHz to 100 kHz (RGB)
Vertical frequency	Autoscan 50 Hz to 100 Hz
Resolution range	Autoscan 720 x 525 to 1600 x 1200

Video processing

Decoder	9 bit digital
Digital sampling	24 bit, 8 bits per color; 13.5 MHz standard (video), 140 MHz standard (RGB)
Colors	16.78 million
Horizontal filtering	4 levels
Vertical filtering	8 levels

Video output

Number/signal type	2 scaled RGBHV, RGBS
Connectors	2 x 5 BNC female, (2) 15-pin HD female
Nominal level	0.7 V p-p for RGB
Minimum/maximum levels	0 V to 0.7 V p-p
Impedance	75 ohms
Scaled resolution	
ISS 108	640x480 ^{1,3,4,5} , 800x600 ^{1,3,4,5} , 832x624 ^{3,4,5} , 848x480 ³ , 852x480 ³ , 1024x768 ^{1,3,4,5}
ISS 408	640x480 ^{1,3,4,5} , 800x600 ^{1,3,4,5} , 832x624 ^{3,4,5} , 848x480 ³ , 852x480 ³ , 1024x768 ^{1,3,4,5} , 1280x768 ² , 1280x1024 ^{1,3,5} , 1360x765 ³ , 1365x1024 ^{3,5} , 1400x1050 ^{1,3,5} , 576p ^{1,5} , 720p ^{3,5} , 1080p ^{3,5} , 1080i ^{1,3,5}
	¹ = at 50 Hz ² = at 56 Hz ³ = at 60 Hz ⁴ = at 75 Hz ⁵ = locked to the current input's vertical refresh rate
Return loss	-30 dB @ 5 MHz
DC offset	±5 mV maximum with input at 0 offset
Switching type	Seamless switching (cut or dissolve)

Sync

Input type	Autodetect RGBHV, RGBS, RGsB, RGBcvS
Output type	RGBHV, RGBS
Standards	NTSC 3.58, NTSC 4.43, PAL, SECAM
Input level	0 V to 5.0 V p-p
Output level	0 V to 5.0 V p-p
Input impedance	510 ohms
Output impedance	75 ohms
Max input voltage	5.0 V p-p
Max. propagation delay	20 nS
Polarity	Positive or negative (selectable)

Audio

Gain	Unbalanced output: 0 dB; balanced output: +6 dB
Frequency response	20 Hz to 20 kHz, ± 0.05 dB
THD + Noise	0.03% @ 1 kHz at nominal level, 0 dB gain
S/N	>90 dB at rated maximum output
Crosstalk	<-80 dB @ 1 kHz, fully loaded
Stereo channel separation	>90 dB @ 1 kHz
CMRR	>75 dB @ 20 Hz to 20 kHz

Audio input

Number/signal type	8 stereo, balanced/unbalanced
Connectors	(8) 3.5 mm captive screw connectors, 5 pole
Impedance	>10 kohms unbalanced/balanced, DC coupled
Nominal level	+4 dBu (1.23 V), -10 dBV (316 mV)
Maximum level	+19.5 dBu, (balanced or unbalanced) at 1%THD+N
Input gain adjustment	-24 dB to +9 dB, adjustable per input

Audio output

Number/signal type	2 stereo, balanced/unbalanced
Connectors	(2) 3.5 mm captive screw connectors, 5 pole
Impedance	50 ohms unbalanced, 100 ohms balanced
Gain error	± 0.1 dB channel to channel
Maximum level (Hi-Z)	>+21 dBu, balanced or unbalanced at stated %THD+N
Maximum level (600 ohm)	>+15 dBm, balanced or unbalanced at stated %THD+N

NOTE 0 dBu = 0.775 volts (RMS).

Control/remote — switcher

Serial control port	RS-232, 9-pin female D connector
Baud rate and protocol	9600, 8-bit, 1 stop bit, no parity
Serial control pin configurations	2 = TX, 3 = RX, 5 = GND
Ethernet control port	1 RJ-45 female connector
Ethernet data rate	10/100Base-T, half/full duplex with autodetect
Ethernet protocol	ARP, ICMP (ping), TCP/IP, Telnet
Program control	Extron's control program for Windows® Extron's Simple Instruction Set™ – SIS™ Microsoft Explorer, Netscape Navigator, Telnet

General

Power	100 VAC to 240 VAC, 50/60 Hz, 60 watts, internal, auto-switchable
Temperature/humidity	Storage -40° to +158°F (-40° to +70°C) / 10% to 90%, non-condensing Operating +32° to +122°F (0° to +50°C) / 10% to 90%, non-condensing
Rack mount	Yes
Enclosure type	Metal
Enclosure dimensions	5.25" H x 17.5" W x 11.2" D (3U high, full rack width) 13.3 cm H x 44.5 cm W x 28.4 cm D (Depth excludes connectors and knobs. Width excludes rack ears.)
Product weight	11.2 lbs (5.1 kg)
Shipping weight	17 lbs (7.7 kg)
	DIM weight 21
Vibration	ISTA/NSTA 1A in carton (International Safe Transit Association)

Reference Information, cont'd

Listings	UL, CUL
Compliances	CE, FCC Class B
MTBF	30,000 hours
Warranty	3 years parts and labor

NOTE Specifications are subject to change without notice.

Part Numbers

Included parts

These items are included in each order for an ISS 108 or ISS 408:

Included parts	Part number
ISS 108	60-422-01
ISS 408	60-423-01
Rubber feet (self-adhesive) (4)	
IEC power cord	
Tweezer (small screwdriver)	
ISS 108 and ISS 408 User's Manual	
ISS/ISM Windows-based control program	

Optional accessories

Part	Part number
DVI output card	70-244-01
DVI (male) to DFP (female) adapter	26-497-01
DVI (female) to DFP (male) adapter	26-498-01
RCP 2000 Remote Control Panel for the ISS 108 and ISS 408	60-571-01
Captive screw audio connector	10-319-10
RCA-to-BNC adapter	10-264-01
SVHS - BNC adapter	26-353-01

Cables

When using signals with a scanning frequency of 15-120 kHz and running distances of 100 feet or more, use high resolution BNC cables to achieve maximum performance.

Bulk cable

Extron Part RG6/super high resolution cable	Part #
RG6/SHR-1 bulk , 500'	22-098-02
RG6/SHR-1 bulk , 1000'	22-098-03
RG6/SHR-4 bulk , 500'	22-099-02
RG6/SHR-5 bulk , 500'	22-100-02
RG6/SHR male crimp connectors, qty. 50	100-075-51

BNC-4 Mini HR Cable

BNC-4 Mini HR bulk, 500'	22-032-02
BNC-4 Mini HR bulk, 1000'	22-032-03

BNC-5 Mini HR Cable

BNC-5 Mini HR bulk, 500'	22-020-02
BNC-5 Mini HR bulk, 1000'	22-020-03

Plenum BNC-5 Mini HR Cable

Plenum BNC-5 Mini HR bulk, 500'	22-103-02
Plenum BNC-5 Mini HR bulk, 1000'	22-103-03

Assorted connectors

BNC connectors

BNC Mini HR crimp connectors, qty. 50	100-074-51
SHR male crimp connectors, qty. 50	100-075-51
BNC bulkhead connectors, qty. 50 (for custom wall plates)	100-076-51

Pre-cut cables

BNC-4 Mini HR cable is used for RGBS cable runs, and BNC-5 Mini HR cable is used for RGBHV cable runs. Either type can also be used for composite video, S-video, or RGB. All Extron BNC cables have male connectors on both ends. A plenum version of the BNC-5 Mini HR cable is also available.

BNC-4 Mini HR Cable

BNC-4 MHR (25 feet/7.5 meters to 300 feet/90.0 meters)	26-210-xx
--	-----------

BNC-5 Mini HR Cable


BNC-5 MHR (25 feet/7.5 meters to 300 feet/90.0 meters)	26-260-xx
--	-----------

NOTE Bulk cable in lengths up to 5000' (1524 meter) rolls is available with or without connectors.

Button Labels

Eight sets of button labels are provided on the next page. Feel free to cut them out of the manual, write the applicable button information in each button area, and place them in the switcher's label window.

Reference Information, cont'd

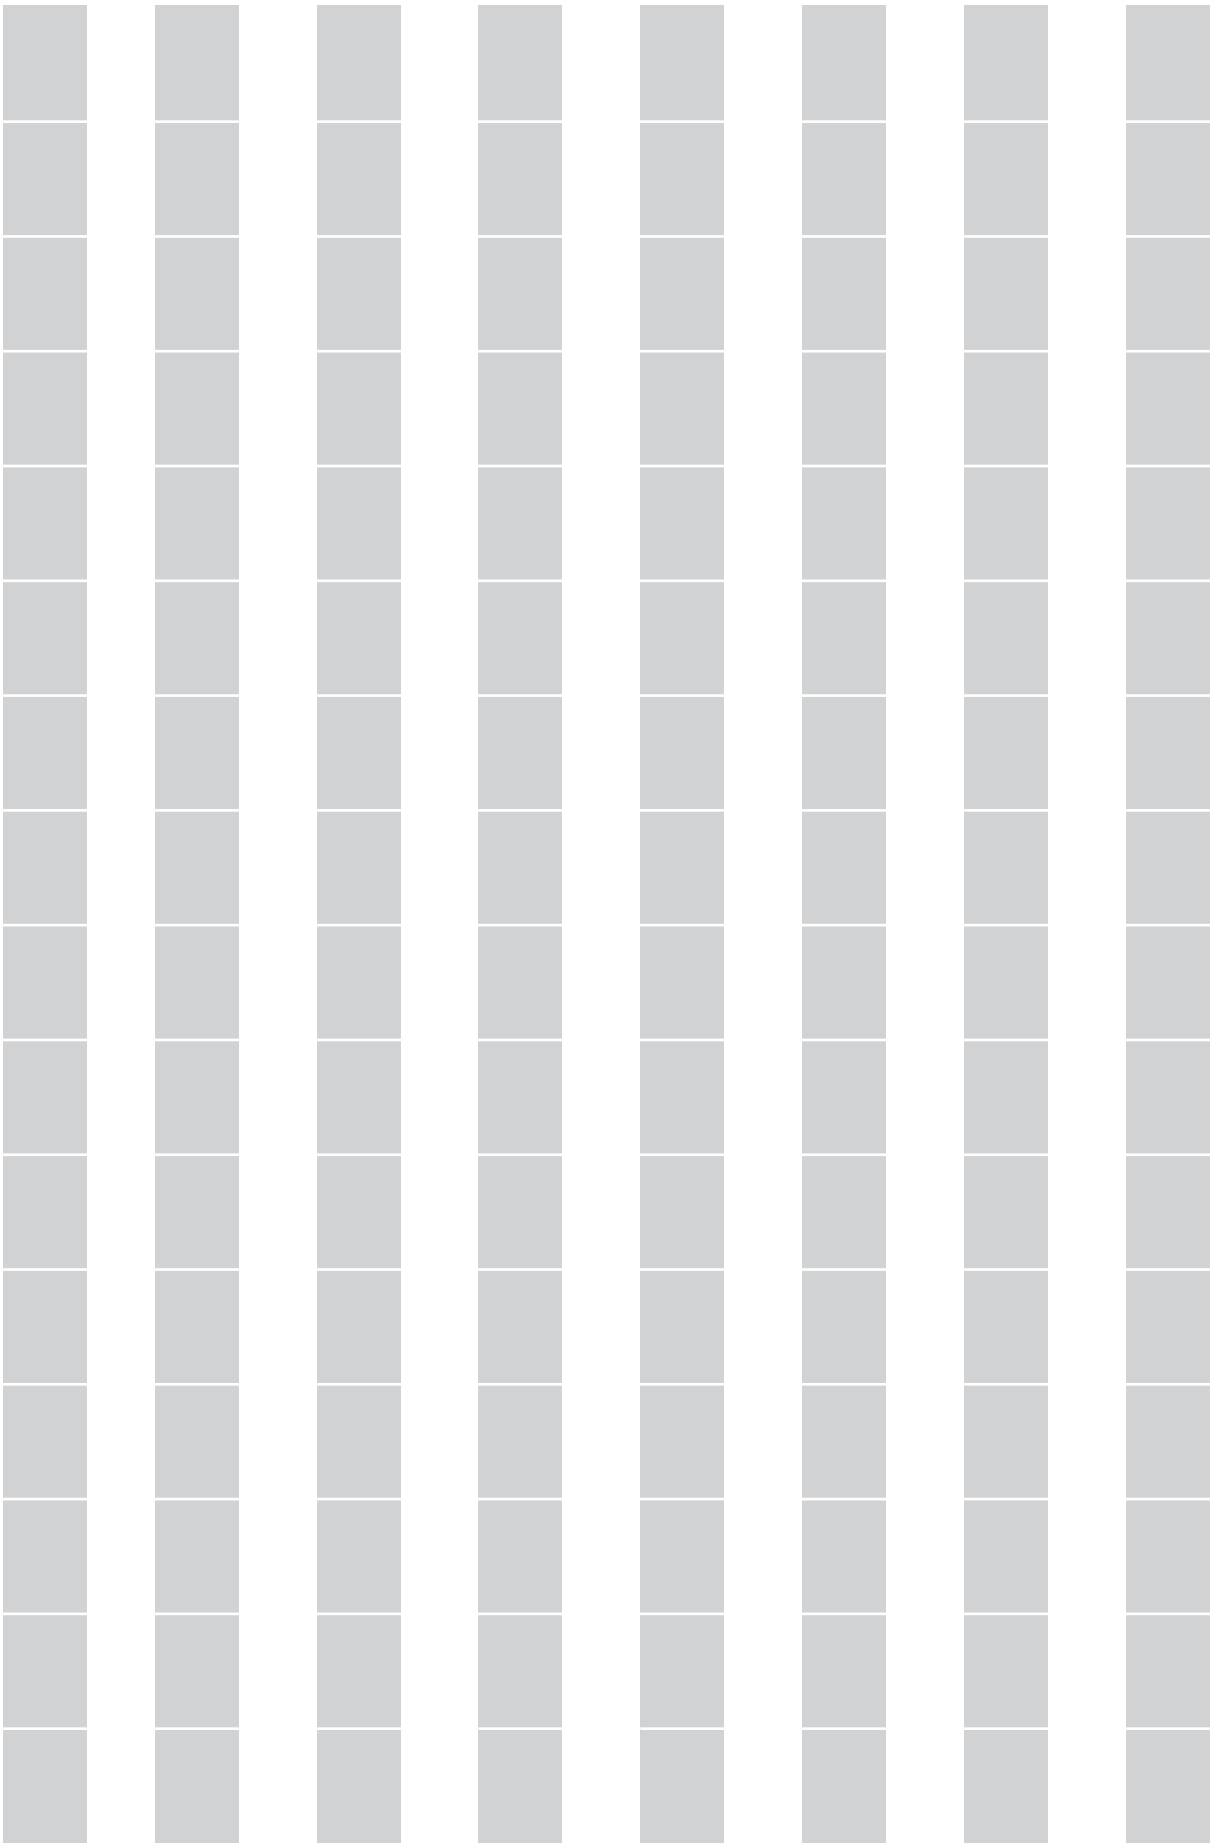

Reference Information, cont'd

FCC Class B Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This unit was tested with shielded cables on the peripheral devices. Shielded cables must be used with the unit to ensure compliance.

Extron's Warranty

Extron Electronics warrants this product against defects in materials and workmanship for a period of three years from the date of purchase. In the event of malfunction during the warranty period attributable directly to faulty workmanship and/or materials, Extron Electronics will, at its option, repair or replace said products or components, to whatever extent it shall deem necessary to restore said product to proper operating condition, provided that it is returned within the warranty period, with proof of purchase and description of malfunction to:

**USA, Canada, South America,
and Central America:**

Extron Electronics
1230 South Lewis Street
Anaheim, CA 92805, USA

Europe, Africa, and the Middle East:

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort
The Netherlands

Asia:

Extron Electronics, Asia
135 Joo Seng Road, #04-01
PM Industrial Bldg.
Singapore 368363

Japan:

Extron Electronics, Japan
Kyodo Building
16 Ichibancho
Chiyoda-ku, Tokyo 102-0082
Japan

This Limited Warranty does not apply if the fault has been caused by misuse, improper handling care, electrical or mechanical abuse, abnormal operating conditions or non-Extron authorized modification to the product.

If it has been determined that the product is defective, please call Extron and ask for an Applications Engineer at (714) 491-1500 (USA), 31.33.453.4040 (Europe), 65.6383.4400 (Asia), or 81.3.3511.7655 (Japan) to receive an RA# (Return Authorization number). This will begin the repair process as quickly as possible.

Units must be returned insured, with shipping charges prepaid. If not insured, you assume the risk of loss or damage during shipment. Returned units must include the serial number and a description of the problem, as well as the name of the person to contact in case there are any questions.

Extron Electronics makes no further warranties either expressed or implied with respect to the product and its quality, performance, merchantability, or fitness for any particular use. In no event will Extron Electronics be liable for direct, indirect, or consequential damages resulting from any defect in this product even if Extron Electronics has been advised of such damage.

Please note that laws vary from state to state and country to country, and that some provisions of this warranty may not apply to you.

**Extron Electronics, USA**

1230 South Lewis Street
Anaheim, CA 92805
USA
714.491.1500
Fax 714.491.1517

Extron Electronics, Europe

Beeldschermweg 6C
3821 AH Amersfoort
The Netherlands
+31.33.453.4040
Fax +31.33.453.4050

Extron Electronics, Asia

135 Joo Seng Road, #04-01
PM Industrial Building
Singapore 368363
+65.6383.4400
Fax +65.6383.4664

Extron Electronics, Japan

Kyodo Building
16 Ichibancho
Chiyoda-ku, Tokyo 102-0082 Japan
+81.3.3511.7655
Fax +81.3.3511.7656